
FED. SUP CLASS
5990

NOTICE - REVIEW/USER INFORMATION IS CURRENT AS OF DATE OF THIS DOCUMENT. FOR FUTURE COORDINATION OF CHANGES TO THIS DOCUMENT, DRAFT CIRCULATION SHOULD BE BASED ON THE INFORMATION IN THE CURRENT DODISS.

USER INTEREST:
ARMY - AV
NAVY - AS, CG, MC
AF - 17

REVIEWER INTEREST:
ARMY - MU, EL, MI
NAVY - AS, SH
AF - 11, 85

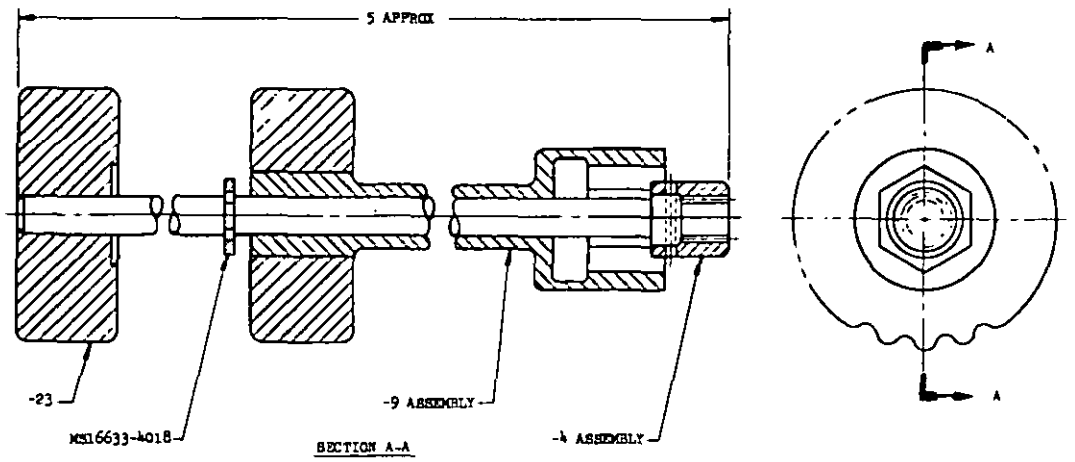


SECTION A-A

TABLE I

ASSEMBLY DASH NO.	NOMINAL HEX SOCKET	MATING SPLINE DATA			
		SHAFT O.D.	NO. TEETH	D. P.	P. A.
-1	7/16	.250	22	96	20°

-1 ASSEMBLY
(SEE TABLE I)

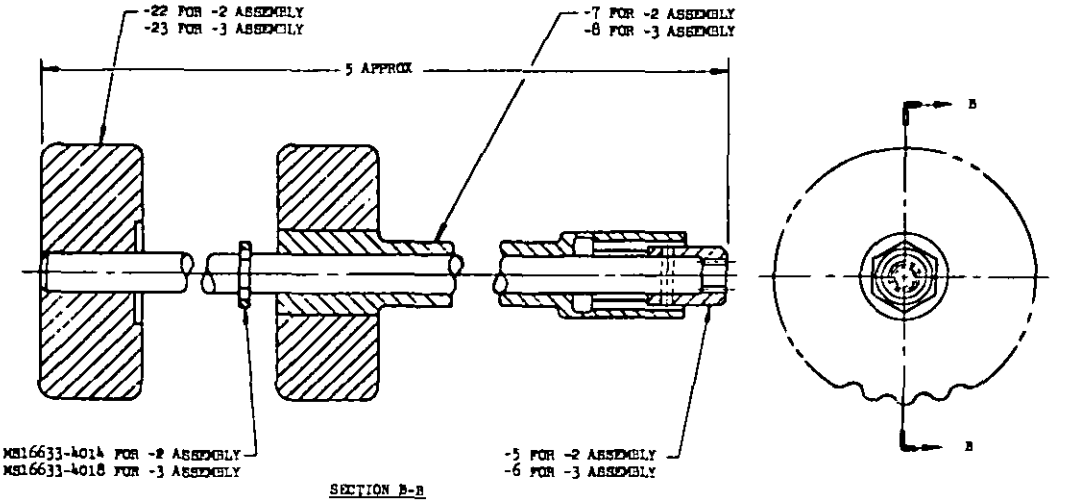

SECTION B-B

TABLE II

ASSEMBLY DASH NO.	NOMINAL HEX SOCKET	MATING SPLINE DATA			
		SHAFT O.D.	NO. TEETH	D.P.	P.A.
-2	1/4	.125	13	120	20°
-3	5/16	.187	21	120	20°

-2 AND -3 ASSEMBLY
(SEE TABLE II)

APPROVED 6 JUNE 1967 REVISED


This military standard is approved by the Department of Defense and is mandatory for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. NAVY-AS Other Cust ARMY - MI NAVY - AS AF - 11	TITLE WRENCH, SOCKET	MILITARY STANDARD MS90395
PROCUREMENT SPECIFICATION NONE	SUPERSEDES: NAVORD 677037, 677038, 813862	SHEET 1 OF 6


DD FORM 672-1 (Coordinated) W87 PLATE NO. 15320

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:36Z
Check the source to verify that this is the current version before use.


FED. SUP CLASS
5990

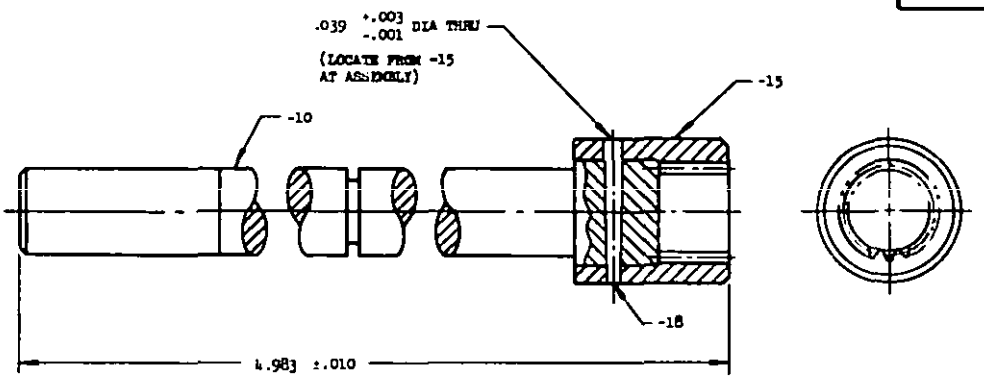

-4 SHAFT AND SOCKET ASSEMBLY

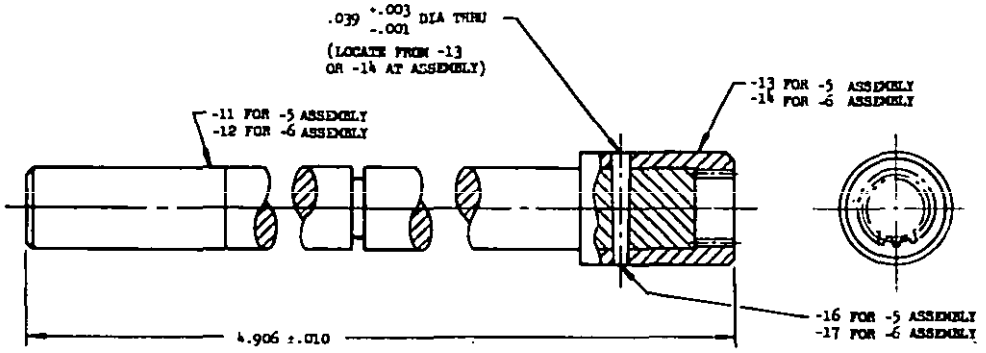

-5 SHAFT AND SOCKET ASSEMBLY
-6 SHAFT AND SOCKET ASSEMBLY

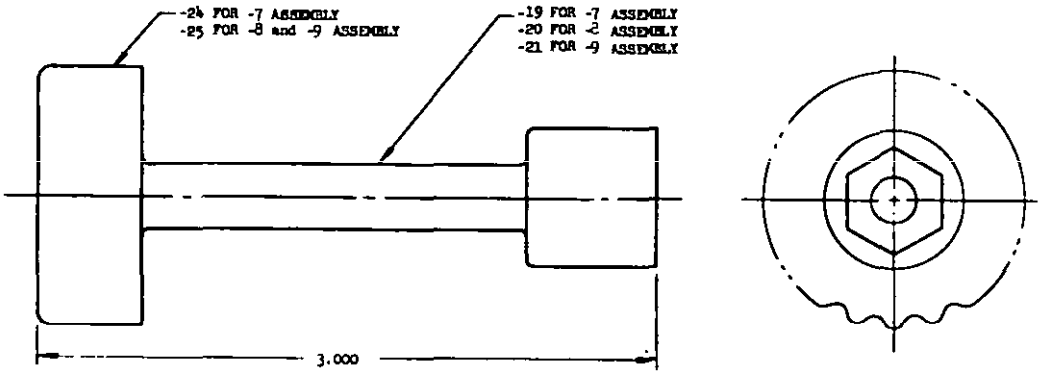

-7 SOCKET HANDLE ASSEMBLY
-8 SOCKET HANDLE ASSEMBLY
-9 SOCKET HANDLE ASSEMBLY

NOTICE - REVIEW/USER INFORMATION IS CURRENT AS OF DATE OF THIS DOCUMENT. FOR FUTURE COORDINATION OF CHANGES TO THIS DOCUMENT, DRAFT CIRCULATION SHOULD BE BASED ON THE INFORMATION IN THE CURRENT MODISS.

USER INTEREST: ARMY - AV, NAVY - AS, CG, MC, AF - 17

REVIEWER INTEREST: ARMY - MU, FL, MI, NAVY - AS, SH, AF - 11, 85

This military standard is approved by the Department of Defense and is mandatory for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repairing use shall be made from this document.

APPROVED 6 JUNE 1967 REVISED

P.A. NAVY-AS Other Cust ARMY - MU NAVY - AS AF - 11	TITLE WRENCH, SOCKET	MILITARY STANDARD MS90395
PROCUREMENT SPECIFICATION NONE	SUPERSEDES: BUORD 677037, 677038, 813962	SHEET 2

DD FORM 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOL. W67 PLATE NO. 15320


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:36Z
Check the source to verify that this is the current version before use.

NOTICE - REVIEW/USER INFORMATION IS CURRENT AS OF DATE OF THIS DOCUMENT. FOR FUTURE COORDINATION OF CHANGES TO THIS DOCUMENT, DRAFT CIRCULATION SHOULD BE BASED ON THE INFORMATION IN THE CURRENT DODISS.


USER INTEREST:
ARMY - AV
NAVY - AS, CR, MC
AF - 17

REVIEWER INTEREST:
ARMY - MI, EL, MI
NAVY - AS, SH
AF - 11, 85

FED. SUP CLASS
5990

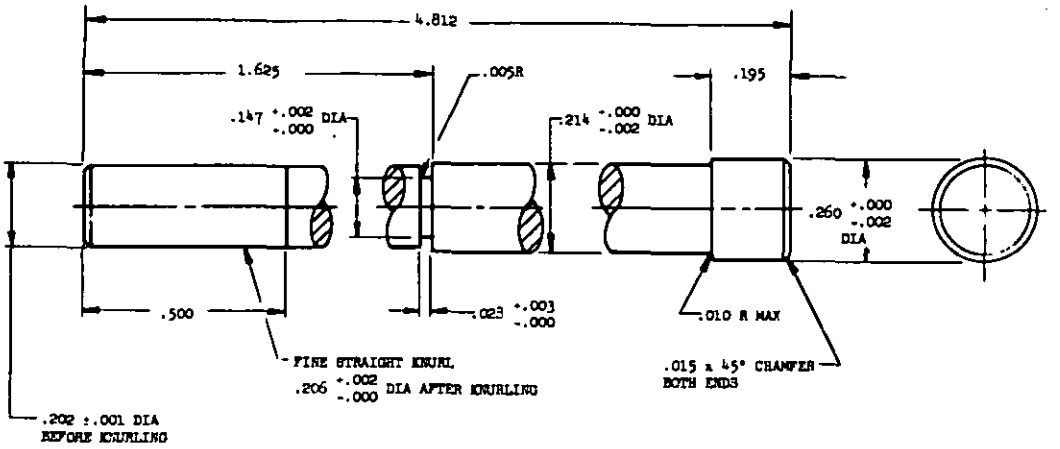

-10 SPLINE SHAFT

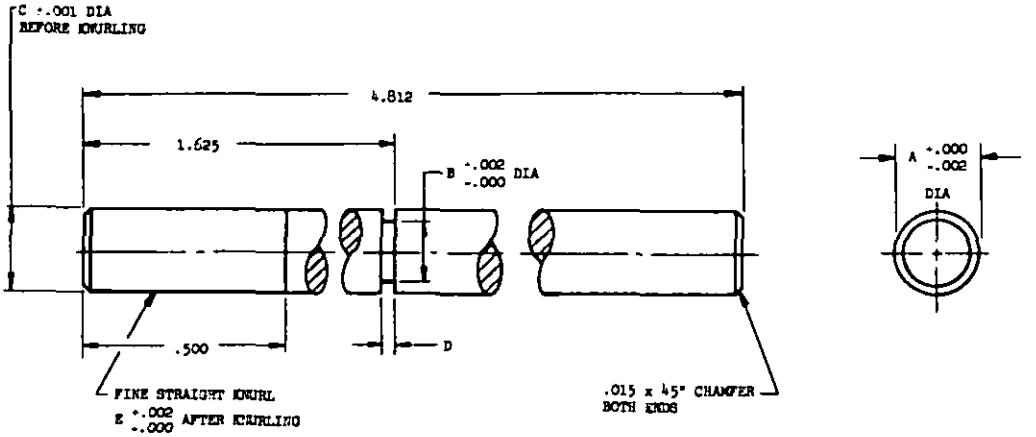

(SEE TABLE III)

TABLE III

DASH NO.	A DIA	B DIA	C DIA	D	E
-11	.139	.102	.133	.017 +.002 -.000	.137
-12	.208	.147	.202	.026 +.003 -.000	.206

-11 SPLINE SHAFT
-12 SPLINE SHAFT

(SEE TABLE III)

APPROVED 6 JUNE 1967 REVISED

This military standard is approved by the Department of Defense and is mandatory for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. NAVY - AS Other Cust ARMY - MI NAVY - AS AF - 11	TITLE WRENCH, SOCKET	MILITARY STANDARD MS90395
PROCUREMENT SPECIFICATION NONE	SUPERSEDES: BUORD 677037, 677033, 913362	SHEET 3

DD FORM 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE WB7 PLATE 40, 15320

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:36Z
Check the source to verify that this is the current version before use.

NOTICE - REVIEW/USER INFORMATION IS CURRENT AS OF DATE OF THIS DOCUMENT. FOR FUTURE COORDINATION OF CHANGES TO THIS DOCUMENT, DRAFT CIRCULATION SHOULD BE BASED ON THE INFORMATION IN THE CURRENT DODISS.

USER INTEREST:
ARMY - AV
NAVY - AS, CG, MC
AF - 17

REVIEWER INTEREST:
ARMY - MU, EL, MI
NAVY - AS, SH
AF - 11, 85

FED. SUP CLASS
5990

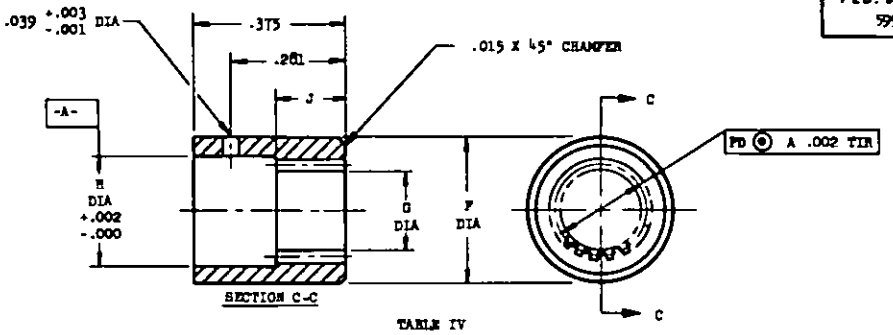


TABLE IV

DASH NO.	F DIA	G DIA	H DIA	J
-13	.240	.102 +.000 -.003	.140	.094
-14	.300	.169 +.000 -.003	.209	.094
-15	.359	.206 +.003 -.000	.260	.171 +.010 -.000

TABLE V

DATA	GEAR DATA		
	DASH NO.		
	-13	-14	-15
TOOTH FORM	FULL DEPTH TRUE INVOLUTE	FULL DEPTH TRUE INVOLUTE	SPECIAL DEPTH TRUE INVOLUTE
PRESSURE ANGLE	20°	20°	20°
NO. OF TEETH	13	21	22
DIAMETRAL PITCH	120	120	96
PITCH DIAMETER (DATUM)	.1083	.1750	.2291
ROOT DIAMETER (MIN)	.1330	.2000	
BACKLASH	.0005 +.0025 -.0000	.0005 +.0025 -.0000	
CIRCULAR SPACE WIDTH			.0164 +.0008 -.0000
MAJOR DIAMETER			.252 +.000 -.004

-13, -14 AND -15 SPLINE SOCKET
(SEE TABLE IV AND V)

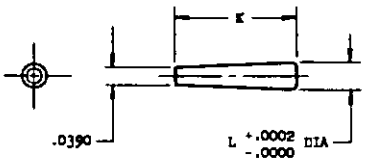


TABLE VI

DASH NO.	K	L DIA
* -16	.240	.0440
* -17	.300	.0453
* -18	.350	.0463

* T.P.F. .250

-16, -17 AND -18 TAPER PIN
(SEE TABLE VI)

APPROVED 6 JUNE 1967 REVISED

This military standard is approved by the Department of Defense and is mandatory for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. NAVY-AS Other Cust ARMY - MU NAVY - AS AF - 11	TITLE WRENCH, SOCKET	MILITARY STANDARD MS90395
PROCUREMENT SPECIFICATION NONE	SUPERSEDES: SUCOM 677037, 677038, 813862	SHEET 4


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:36Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5990


NOTICE - REVIEW/USER INFORMATION IS CURRENT AS OF DATE OF THIS DOCUMENT. FOR FUTURE COORDINATION OF CHANGES TO THIS DOCUMENT, DRAFT CIRCULATION SHOULD BE BASED ON THE INFORMATION IN THE CURRENT DODISS.

USER INTEREST: ARMY - AV
NAVY - AS, CG, MC
AF - 17

REVIEWER INTEREST: ARMY - MU, EL, MI
NAVY - AS, SH
AF - 11, 85

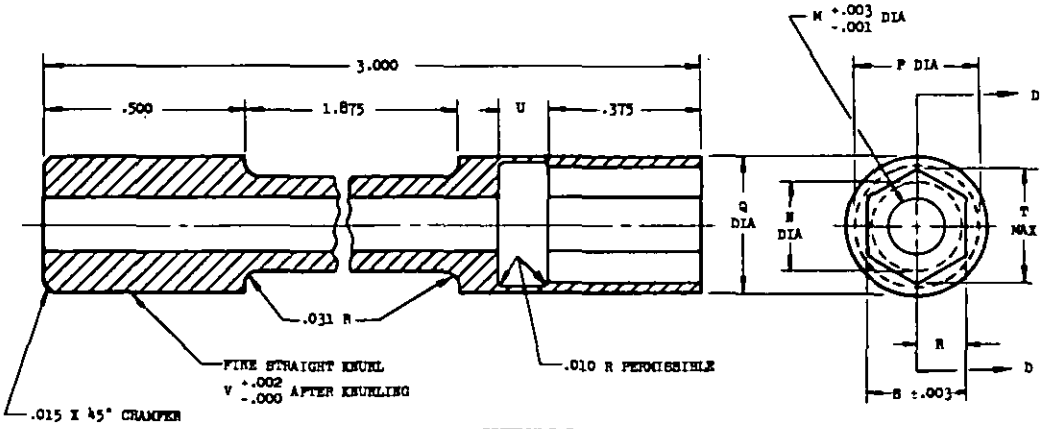

SECTION D-D

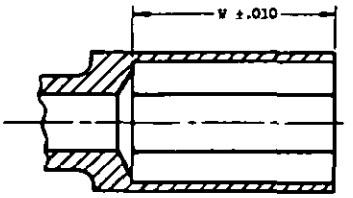


OPTIONAL CONSTRUCTION

TABLE VII

DASH NO.	M DIA	N DIA	P DIA	Q DIA	R	S	T	U	V	W
-19	.141	.235	.300 +.005 -.001	.330	.128 ±.001	.256	.295	.125 ±.010	.334	.500
-20	.210	.305	.370 +.003 -.001	.400	.158 ±.001	.318	.365	.125 ±.010	.404	.500
-21	.218	.305	.622	.675	.222 ±.004	.445	.517	.171 ±.010	.404	.546 ±.020

-19, -20 AND -21 SOCKET SHAFT
(SEE TABLE VII)

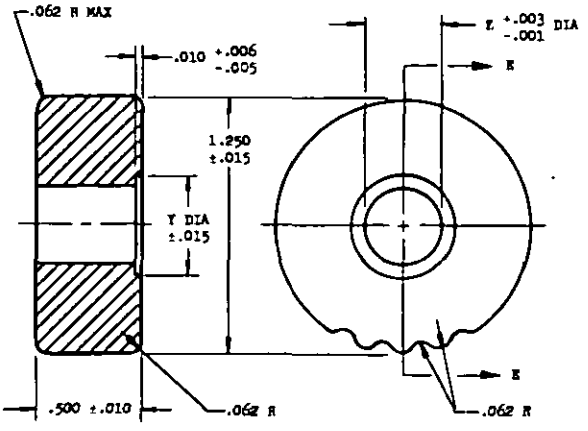

SECTION E-E

-22, -23, -24 AND -25 HANDLE
(SEE TABLE VIII)

TABLE VIII

DASH NO.	Y DIA	Z DIA	GROOVE DATA	
			NO. OF GROOVES	DEPTH
-22	.250	.128	20	.048
-23	.312	.196	20	.048
-24	.437	.324	20	.048
-25	.500	.394	20	.048

APPROVED 6 JUNE 1967 REVISED

This military standard is approved by the Department of Defense and is mandatory for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. NAVY - AS Other Cust ARMY - MU NAVY - AS AF - 11	TITLE WRENCH, SOCKET	MILITARY STANDARD MS90395
PROCUREMENT SPECIFICATION NONE	SUPERSEDES: BOORD 677037, 677038, 813862	SHEET 5

DD FORM 1 SEP 67 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS PLAN ARE OBSOLETE. W87

PLATE NO. 15120

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:36Z
Check the source to verify that this is the current version before use.

NOTICE - REVIEW/USER INFORMATION IS CURRENT AS OF DATE OF THIS DOCUMENT. FOR FUTURE COORDINATION OF CHANGES TO THIS DOCUMENT, DRAFT CIRCULATION SHOULD BE BASED ON THE INFORMATION IN THE CURRENT DODISS.

USER INTEREST:
ARMY - AV
NAVY - AS, CG, MC
AF - 17

REVIEWER INTEREST:
ARMY - MU, [illegible]
NAVY - AS, [illegible]
AF - 11, 85

FED. SUP CLASS
5990

NOTES:

1. MATERIAL: (A) SPLINE SHAFT -10, -11, AND -12: ALUMINUM ALLOY 6061, QQ-A-220/8, TEMPER T6.
   (B) SOCKET SHAFT -19, -20 AND -21; STEEL, CORROSION RESISTING, QQ-S-763, CLASS 410, COND A, ANNEALED.
   (C) SPLINE SOCKET -13, -14 AND -15; BRASS ROD, QQ-B-626, COMP 11, HALF HARD.
   (D) HANDLE -22, -23, -24 AND -25; MOLDED PHENOLIC RESIN, THERMOSETTING MIL-M-14, TYPE CFG.
   (E) TAPER PIN -16, -17, AND -18; STEEL, CORROSION RESISTING, QQ-S-763, CLASS 420, COND A, ANNEALED.

2. FINISH: (A) SPLINE SOCKET -13, -14, AND -15; NICKEL PLATE, QQ-N-290, CLASS 2, .0001 TO .0003 THICK.

3. SURFACE ROUGHNESS: SPLINE SHAFT -10, -11, AND -12, SOCKET SHAFT -19, -20, AND -21, SPLINE SOCKET -13, -14, AND -15; FINISH ALL OVER 125. HANDLE -22, -23, -24 AND -25; SHALL BE AS MOLDED, BLEED ALL RADII. SURFACE CONDITION FINISH DESIGNATIONS SHALL BE INTERPRETED IN ACCORDANCE WITH MIL-STD-10.

4. HEAT TREATMENT: TAPER PIN -16, -17, AND -18; HEAT TO 1825° F ±25° F., QUENCH IN OIL, DRAW AT APPROX 600° F. FOR 1/2 HOUR TO ROCKWELL C49-52.

5. REMOVE ALL BURRS AND BREAK ALL SHARP EDGES.

6. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCE: DECIMALS ±.005, ANGLES ±1°. ALL DIMENSIONS FOR SPLINE SOCKET -13, -14, and -15, SHALL APPLY AFTER PLATING. INTERPRET DIMENSIONING AND TOLERANCING IN ACCORDANCE WITH MIL-STD 8.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

APPROVED 6 JUNE 1967 REVISED

This military standard is approved by the Department of Defense and is mandatory for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. NAVY -AS Other Cust ARMY - MU NAVY - AS AF - 11	TITLE WRENCH, SOCKET	MILITARY STANDARD MS90395
PROCUREMENT SPECIFICATION NONE	SUPERSEDES: BUORD 677037, 677038, 813862	SHEET 6

DD FORM 672-1 (Coordinated) — PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. — W67 — PLATE NO. 15320

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:36Z
Check the source to verify that this is the current version before use.