MIL-G-43958(GL)

17 December 1976
SUPERSEDING
(See 6.6)

MILITARY SPECIFICATION

GLOVES, CLOTH, BLACK, LINED, GIRL'S, Jr. R.O.T.C.

This specification is approved for use by Natick Research and Development Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers requirements for dress gloves with outer shell made of nylon knitted simplex cloth, sueded on both sides, with a seamless circular knit acrylic liner.

1.2 Classification. The gloves shall be of the one type in the following sizes as specified (see 6.2):

Schedule of sizes

Small
Medium
Large
X-Large

2. APPLICABLE DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: US Army Natick Research and Development Command (GL), Natick, MA 01760, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 8445

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:11Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

FEDERAL

V-T-295	-	Thread, Nylon
DDD-L-20	-	Labels: for Clothing, Equipage, and Tentage, (General Use)
PPP-B-566	-	Boxes, Folding, Paperboard
PPP-B-636	-	Boxes, Shipping, Fiberboard
PPP-B-676	-	Boxes, Setup
PPP-T-45	-	Tape, Gummed; Paper, Reinforced and Plain, For Sealing and Securing

MILITARY

MIL-C-29135	-	Cloth, Knitted, Nylon, Simplex

STANDARDS

FEDERAL

FED-STD-191	-	Textile Test Methods
FED-STD-751	-	Stitches, Seams, and Stitchings

MILITARY

MIL-STD-105	-	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	-	Marking for Shipment and Storage

(Copies of specifications, standards, drawings and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

LAWS AND REGULATIONS

US POSTAL SERVICE MANUAL

(Copies of the manual may be obtained from the Superintendent of Documents, US Government Printing Office, Washington, DC 20402.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:11Z
Check the source to verify that this is the current version before use.

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Application for copies should be addressed to the American Trucking Associations, Inc., Traffic Department, 1616 P Street, N.W., Washington, DC 20036.)

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, IL 60606.)

3. REQUIREMENTS

3.1 Guide samples. Guide samples, when furnished, are solely for guidance and information to the contractor (see 6.3). Variations from this specification may appear in the sample in which case this specification shall govern.

3.2 First article. When specified (see 6.2) the contractor shall furnish a sample for first article inspection and approval (see 4.3 and 6.4).

3.3 Material.

3.3.1 Cloth, nylon simplex. The black nylon cloth for the outer shell of the glove shall conform to class 2 of MIL-C-29135 except that the yarn shall be 40 denier.

3.3.2 Liner. Each glove shall have a proportionately sized seamless, circular knit (jersey stitch), black liner fabricated from 100 percent acrylic spun yarns. The liner shall be made using non-automatic knitting machines or fully automatic knitting machines. The thumb and fingertips of the liner shall be hand closed or auto-knit closed with the same yarn used to make the liner. The liner shall not be cut and sewn closed. The colorfastness of the liner shall be equal to or better than the standard sample when tested as specified in 4.4.2.2. When no standard sample is available, the colorfastness shall be good to perspiration, laundering and crocking. The liner shall meet the physical requirements of table I when tested as specified in 4.4.2.2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:11Z
Check the source to verify that this is the current version before use.

TABLE I. Physical requirements of liner

Characteristics	Requirements	
	Minimum	Maximum
Wales per inch (cm)	9 (4)	13 (5)
Courses per inch (cm)	11 (4)	15 (6)
Weight per dozen pairs of liners (in ounces) (g)		
Small size	9.0 (255)	-
Medium size	9.3 (264)	-
Large size	9.6 (272)	-
X-Large size	9.9 (281)	-

3.3.3 Thread. The thread for sewing the gloves shall conform to type I, size A, class 1, subclass A of V-T-295. The thread shall be dyed Black, AA, C.A. 66043.

3.3.4 Labels.

3.3.4.1 Identification and size label. Each glove shall be marked with a combination identification and size label conforming to type I, class 4 of DDD-L-20. The label shall show fastness to laundering as specified in DDD-L-20.

3.3.4.2 Instruction label. The instruction label for insertion in the right hand glove shall be legibly printed in black on a lightweight, white paper slip not less than 2-1/2 by 5 inches (6.4 by 12.7 cm) in size. The legend shall be as follows:

GLOVES, CLOTH, BLACK, LINED, GIRL'S, Jr. R.O.T.C. - WASHING INSTRUCTIONS

WARNING: DO NOT USE HOT WATER OR BLEACH

a. Hand Washing.

1. Soak gloves for about 5 minutes in a warm soap or synthetic detergent solution.
2. Wash gloves by rubbing them together either on or off hands.
3. Rinse gloves thoroughly with warm water and dry away from heat.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:11Z
Check the source to verify that this is the current version before use.

b. Machine Washing:

1. Gloves may be machine washed in warm water using soap or synthetic detergent.
2. Do not tumble dry. Dry away from heat.

Size of Lettering: Lines one, two and all capital letters shall be 1/8 inch (0.3 cm) high. All remaining letters shall be 3/32 inches (0.2 cm) high.

3.4 Design. The gloves shall be a slip on style, five finger type, with a boulton thumb, continuous strip fourchette, 1/2 inch (1.3 cm) turnover stitched hem around a flared top opening and pique stitched back of fingers. The gloves shall consist of a black simplex (sueded on both sides) knitted outer shell and a proportionately sized black acrylic seamless knit liner. The liner shall be tacked to the inner finger tips of the outer nylon shell (see figure 1).

3.4.1 Figure 1. Figure one is furnished for information purposes only.

3.5 Patterns. Standard patterns for the outer shell will be furnished by the Government. The Government patterns shall not be altered in any way and are to be used for cutting the contractors working patterns. The working patterns shall be identical to the Government patterns.

3.5.1 List of pattern parts. The component parts for the outer shell of the gloves shall be cut from the following material, as specified, and in strict conformance with the number of parts specified in table II.

TABLE II. Pattern parts

Material	Nomenclature of pattern parts	Cut parts per pair
Cloth, nylon knitted, simplex (see 3.3.1)	Body	2
	Fourchette	2
	Thumb	2

3.6 Construction.

3.6.1 Manufacturing operations requirements. The glove shall be made by and with the use of all operations listed in table III. The contractor is not required to follow the exact sequence of operations

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:11Z
Check the source to verify that this is the current version before use.

3.6.2 Stitches, seams, and stitchings. Stitches, seams and stitching types specified in table III shall conform to FED-STD-751. When two or more methods, seams, or stitches are given for the same part of an operation, any one of them may be used. The use of a trimmer attachment on the sewing machines is prohibited.

3.6.2.1 Stitches per inch. The minimum and maximum number of stitches per inch (cm) shall be as specified in table III.

3.6.2.2 Type 301 stitching. Ends of all stitching produced with 301 stitch type, when not caught in other seams or stitching, shall be backtacked not less than 1/4 inch (0.6 cm). Thread tension shall be maintained so there will be no loose stitching resulting in a loose bobbin or top thread, or no excessively tight stitching resulting in puckering of the material sewn.

3.6.2.2.1 Repairs of type 301 stitching. Repairs of type 301 stitching shall be as follows:

a. When thread breaks or bobbin run-outs occur during sewing, the stitching shall be repaired by restarting the stitching a minimum of 1/2 inch (1.3 cm) back of the end of the stitching.

b. Thread breaks, or two or more consecutive skipped stitches or run-offs noted during inspection of the item (in-process or end item) shall be repaired by over-stitching. The stitching shall start a minimum of 1/2 inch (1.3 cm) back of the defective area, continue over the defective area and continue a minimum of 1/2 inch (1.3 cm) beyond the defective area onto the existing stitching. Loose or tight stitching shall be repaired by removing the defective stitching without damaging the material and restitching in the required manner. 1/

1/ When making the above repairs, the ends of stitching are not required to be backstitched.

3.6.2.3 Type 401 stitching. Thread tension shall be maintained so that there will be no loose stitching. Where stitch type 401 is used, the looper thread shall be on the inside of the gloves. Both ends of all seams or stitching produced with 401 stitch type, when not caught in other seams or stitching shall have a 1/2 to 3/4 inch (1.3 to 1.9 cm) chain extending beyond each end. All repairs shall be in accordance with 3.6.2.2.1 a and 3.6.2.2.1 b.

3.6.3 Shade and size marking. The component parts of the glove shall be marked or bundled to insure a uniform shade and size throughout the glove. Any method of marking may be used except:

(a) Metal fastening devices;
(b) Sew-on tickets;
(c) Adhesive-type tickets, which leave traces of paper or adhesive on the material upon removal of the tickets.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:11Z
Check the source to verify that this is the current version before use.

TABLE III. Construction MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH(cm)	THREAD		
				NEEDLE	BOBBIN/ LOOPER	COVER
Cutting. The outer shell shall be cut (see 6.5) in accordance with dies made from the applicable patterns. All component parts shall be cut from the same piece of material with the lengths of the components running in the wale direction as indicated on the patterns. Replacement of damaged parts. Care shall be exercised during the spreading, cutting and manufacturing operations, to assure that material defects and damages as classified in 4.4.2.1.1, 4.4.2.1.2, 4.4.3.1 and 4.4.3.2 are removed from production and replaced with non-defective and properly matched material. Shade and size marking (see 3.6.3). All parts of the glove shall be marked or bundled to insure a uniform shade and size throughout the glove. Attach thumb to outer shell. Join the thumb to the body with a continuous inseam stitch, simultaneously closing the thumb seam. The inseaming shall be 1/16 to 3/32 inch (0.2 to 0.3 cm) from the raw edge.	301 or 401	SSa-1 SSa-1	10-14 (4-6) 10-14 (4-6)	A A	A A	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:11Z
Check the source to verify that this is the current version before use.

TABLE III. Construction (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH(cm)	THREAD		
				NEEDLE	BOBBIN/ LOOPER	COVER
Join continuous fourchette to fingers and close side seam of outer shell.						
a. Pique' stitch continuously the back of the fingers to the continuous fourchette, 1/16 to 3/32 inch (0.2 to 0.3 cm) from the edge.	401	LSa-1	10-14(4-6)	A	A	
b. Inseam the front of body to continuous fourchette simultaneously closing the side seam. The stitch margin shall be 1/16 to 3/32 inch (0.2 to 0.3 cm). Check while stitching to insure that the curved tops of each finger are even.	301 or 401	SSa-1 SSa-1	10-14(4-6) 10-14(4-6)	A A	A A	
Liner.						
The liner shall be positioned in the outer shell in such a manner that the wales side of the liner will be against the hand when the glove is worn. Tack finger tips and thumb tip of liner to inside finger tips and thumb tip of outer shell.						
Hemming and attaching label.						
Turn top raw edge of outer shell over liner 3/8 to 1/2 inch (1.0 to 1.3 cm) and stitch liner to shell with single row of stitching 1/16 to 1/8 inch (0.2 to 0.3 cm) from raw edge of shell catching top edge (long dimension) of label in hem stitching at center back of glove with printed side of label displayed. NOTE: Hemming operation must be performed after closing operation.	301	SSbc-1	10-14(4-6)	A	A	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:11Z
Check the source to verify that this is the current version before use.

O.	TABLE III. Construction (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH (cm)	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
.	Trimming and cleaning. The glove shall be neatly trimmed, free from all surplus materials and loose ends of thread. Remove all spots and stains.						
.	Finishing. Turn gloves right side out and press on properly sized, heated, laying-off boards. The gloves shall be dampened or humidified prior to laying-off. The temperature of the heated form shall be not less than 125°F (52°C).						
0.	Pairing. The gloves shall be matched, paired, and tacked together palm-to-palm with thread, 3/4 inches ± 1/4 inch (1.9 ± 0.6 cm) from the top, approximately 1/8 inch (0.3 cm) in from closing seams. Tacking shall be done with one stitch, using a cord thread which will permit the gloves to be pulled apart without tearing the fabric.						
1.	Inserts. Place a printed instruction label in each right hand glove (see 3.3.4.2).						

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:11Z
Check the source to verify that this is the current version before use.

3.7 Measurements. The measurements of the finished gloves shall be as specified in table IV and shall be taken without pulling or stretching. All measurements and tolerances are expressed in inches (cm).

TABLE IV. Measurements of finished gloves

Figure 1	Sizes				
	Small	Medium	Large	X-Large	Tolerance
Measurement area:					
Overall length (A) inches	10-1/2	10-3/4	11	11-1/4	+1/2 -1/4
(cm)	(26.7)	(27.3)	(27.9)	(28.6)	+1.3 -0.6)
Width at base of thumb 1/					
(B) inches	3-1/2	3-5/8	3-3/4	3-7/8	± 1/8
(cm)	(8.9)	(9.2)	(9.5)	(9.8)	(± 0.3)

1/ Measurement shall be made 1/4 inch (0.6 cm) below crotch of little finger.

3.8 Replacement of defective components. During the spreading, cutting and manufacturing process, components having material defects or damages that are classified as defects in 4.4.2.1.1, 4.4.2.1.2 and 4.4.3.1 shall be removed from production and replaced with non-defective and properly matched components.

3.9 Workmanship. The finished gloves shall conform to the quality of product established by this specification.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Certificate of compliance. When certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3)
b. Quality conformance inspection (see 4.4)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:11Z
Check the source to verify that this is the current version before use.

4.3 First article inspection. When required, the preproduction sample, submitted in accordance with 3.2, shall be inspected as specified in 4.4.2.1.1, 4.4.2.1.2, 4.4.3.1 and 4.4.3.2 for compliance with design, construction, workmanship and dimensional requirements.

4.4 Quality conformance inspection. Sampling and inspection shall be in accordance with MIL-STD-105, except where otherwise indicated hereinafter.

4.4.1 Component and material inspection. In accordance with 4.1 above, components and materials shall be inspected in accordance with all requirements of referenced specifications, drawings and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document.

4.4.2 In-process inspection. Inspection shall be made at any point or during any phase of manufacturing to determine whether operations or assemblies are accomplished as specified. The Government reserves the right to exclude from consideration for acceptance any material or services for which in-process inspection has indicated nonconformance.

4.4.2.1 Visual examination. The defects found during the in-process examination shall be classified in accordance with 4.4.2.1.1 and 4.4.2.1.2. The inspection level and acceptable quality level (AQL) shall be as indicated in 4.4.2.1.3.

4.4.2.1.1 Examination of outer shell. The outer shell shall be examined for the defects listed below. The sample unit shall be one fabricated outer shell without liner and before being hemmed. The lot size shall be expressed in terms of outer shell.

Examine	Defect	Classification Major	Minor
Seams and stitching (except hem)	Open seam:		
	Not repaired	X	
	Not repaired as specified		X
	NOTE: A seam shall be classified as open when one or more stitches joining a seam are broken or when two or more continuous skipped stitches or run-offs occur or when fabric is not securely caught in stitching.		

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:11Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Minor
Seams and stitching (except hem) (cont'd)	Wrong seam type	X	
	Wrong stitch type	X	
	Less than 8 stitches per inch (3.0/cm)	X	
	8 or 9 stitches per inch (3.0 to 4.0/cm)		X
	More than 14 stitches per inch (6.0/cm)		X
	NOTE: Defect for stitches per inch (cm) are to be scored only when the condition exists on the major portion of a seam.		
	Loose tension resulting in a loosely secured seam	X	
	Tight tension resulting in clearly noticeable puckering along seam or stitches break when normal strain is applied to seam or stitching	X	
	Ends of stitching produced with 301 stitch type, when not caught in other seams or stitching backtacked less than 1/4 inch (0.6 cm)		X
	Ends of stitching produced with 401 stitch type, when not caught in other seams or stitching having chain extending less than 1/4 inch (0.6 cm) or more than 3/4 inch (1.9 cm) beyond each end		X
	Ends of stitching produced with 401 stitch type when not caught in other seams or stitching not having the chain extending beyond each end	X	
	Any row of stitching omitted	X	
	Looper thread exposed on outside of glove when 401 stitch type is used		X
	Stitch margin not as specified		X
	Needle chew	X	
Material	Not sueded on both sides	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:11Z
Check the source to verify that this is the current version before use.

4.4.2.1.2 Examination of liner. The liner shall be examined for the defects listed below. The sample unit shall be one fabricated liner before being attached to the outer shell. The lot size shall be expressed in units of one completely fabricated liner.

Examine	Defect	Classification Major	Minor
Material	Hole, cut, tear, smash, open place, visible mend	X	
	Not seamless circular knit	X	
	Not specified color	X	
	Loose yarn, snagged yarn, missing yarn, float, drop stitch, thin place, broken yarn, knitted in waste, dye streak, area of no dye penetration		X
	Knot, slubby yarn more than twice the size of normal diameter of yarn		X
Fingers and thumb	Tips open or insecurely closed	X	
	Not closed as specified	X	
	Bulky or poorly formed		X

4.4.2.1.3 Inspection level and AQL. The inspection level and AQL, expressed in defects per 100 units shall be as follows:

Examination	Inspection level	AQLs Major	Minor
4.4.2.1.1 and 4.4.2.1.2 (visual characteristics)	II	2.5	6.5

4.4.2.2 Testing of the liner. The knitted liner shall be tested for the characteristics listed in table V. The test methods listed in table V are in accordance with FED-STD-191 whenever applicable. The lot size shall be expressed in units of one liner. The sample unit for testing shall be 12 pairs of liners of each size in the lot and the sample size shall be one regardless of lot size. The lot shall be unacceptable if the sample unit fails to meet any requirement specified; all test reports shall contain the individual values utilized in expressing the final result.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:11Z
Check the source to verify that this is the current version before use.

TABLE V. Liner tests

Characteristic	Requirement paragraph	Test method
Material identification	3.3.2	1/
Type of knit	3.3.2	1/
Colorfastness to:		
Perspiration	3.3.2	5680
Laundering	3.3.2	5614
Crocking	3.3.2	5651 2/
Wales and courses per inch	Table I	5070
Weight per dozen pairs	Table I	4.4.2.2.1

1/ A certificate of compliance shall be submitted and will be accepted for the requirement stated.

2/ The specimen shall be 4 inches by 6 inches (10.0 by 15.2 cm).

4.4.2.2.1 Weight determination. The weight per dozen pairs of liners shall be determined using a scale calibrated in ounces (g) and capable of being read to the nearest 0.1 ounce (1 g). One dozen pairs of liners of the same size shall be weighed in a conditioned state as indicated in section 4 of FED-STD-191. The weight shall be reported to the nearest 0.1 ounce (1 g). The procedure shall be repeated for each size in the lot.

4.4.3 Examination of the end item. The defects found during the examination of the completely fabricated glove shall be classified in accordance with 4.4.3.1 and 4.4.3.2. The sample unit shall be one glove and the selection shall be by pairs. The sample unit for pairing defects shall be one pair. Defects of pairing shall be classified as a single defect. The inspection level and the AQL shall be as specified in 4.4.3.3.

4.4.3.1 Visual examination of gloves. The gloves shall be examined for the defects listed below:

Examine	Defect	Classification Major	Minor
Pairing	Not properly mated, e.g., not right and left of same size	X	
	Not tacked together or not tacked as specified		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:11Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Minor
Cleanliness	Spots or stains clearly noticeable, affecting appearance		X
Material (outer shell)	Not specified color, color not uniform		X
	Hole, cut, tear, smash, open place, visible mend	X	
	Loose yarn, snagged yarn, missing yarn, float, drop stitch, thin place, broken yarn, knitted in waste		X
	Knot, slubby yarn more than twice the size of normal diameter of yarn, dye streak, shade bar, area of no dye penetration		X
Seam and stitching (hemming)	Open seam: Not repaired	X	
	Not repaired as specified		X
	NOTE: A seam shall be classified as open when one or more stitches are broken or when two or more continuous skipped stitches or run-offs occur or when liner is not securely caught in hem stitching.		
	Wrong seam type	X	
	Wrong stitch type	X	
	Less than 8 stitches per inch (3.0/cm)	X	
	8 or 9 stitches per inch (3.0 to 4.0/cm)		X
	More than 14 stitches per inch (6.0/cm)		X
	NOTE: Defects for stitches per inch are to be scored only when the condition exists on the major portion of the seam.		

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:11Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Minor
Seams and stitching (hemming) (cont'd)	Loose tension resulting in a loosely secured seam	X	
	Tight tension resulting in clearly noticeable puckering along seam or stitches break when normal tension is applied to seam or stitches	X	
	Ends of stitching produced with 301 stitch type, when not caught in other seams or stitching, backtacked less than 1/4 inch (0.6 cm)		X
	Stitch margin not as specified		X
	Needle chew	X	
Construction and workmanship	Any component misplaced, operation omitted or not properly performed, e.g., finger twisted or distorted	1/	
	Any component not specified color		X
	Any part omitted	X	
	Any thread end on outside of glove not trimmed		X
	Any factory damage	1/	
	Part caught in unrelated row of stitching	X	
	Long dimension of cut part not cut in wales direction of fabric		X
	Bulky hem due to excess liner fabric under hem		X
	Wales side of liner does not face inside of glove		X
	Poor fit of liner to shell		X
	Liner not tacked to outer shell		X
Label (including instruction slip)	Omitted, incorrect, illegible, misplaced		X
	Identification label not securely sewn in wrist hem		X

1/ The defect shall be classified as major when it seriously affects the serviceability or appearance, and minor when affecting serviceability or appearance, but not seriously.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:11Z
Check the source to verify that this is the current version before use.

4.4.3.2 Dimensional examination. The gloves shall be examined for defects in dimensions. Any dimension not within the established tolerance shall be classified as a defect.

4.4.3.3 Inspection levels and AQLs. The inspection levels and AQLs expressed in defects per 100 units shall be as follows:

Examination	Inspection level	AQLs Major	AQLs Total
4.4.3.1, visual characteristics	II	2.5	6.5
4.4.3.2, dimensional characteristics	S-3	-	4.0

4.4.4 Packaging inspection. An examination shall be made to determine that preservation-packaging, packing and marking complies with the section 5 requirements. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be closed. Examination for the closure listed below shall be made on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 and the AQL shall be 2.5 defects per 100 units.

Examine	Defect
Marking (exterior and interior)	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.
Materials	Any component missing, damaged or not as specified.
Workmanship	Inadequate application of components, such as: incomplete closure of container flap, loose strapping, inadequate stapling or improper taping. Open and non-continuous heat sealed seams of polethylene bag. Incorrectly fabricated polyethylene bag. Bulged or distorted container.
Content	Number of gloves per shipping container is more or less than required. Size shown on one or more pairs of gloves not as specified on shipping containers. 1/ Number of pairs of gloves per intermediate package is more or less than required. 1/ Number of intermediate package per container is more or less than required.

1/ For this defect, two intermediate packages shall be examined from each container in the sample.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:11Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Preservation-packaging. Preservation-packaging shall be level A or commercial as specified (see 6.2).

5.1.1 Level A.

5.1.1.1 Unit packaging. Each pair of gloves shall be inserted in a flat style clear polyethylene bag of 0.00125 inch (0.03 mm) thickness (± 25 percent tolerance). The bag shall measure approximately 12 by 14 inches (3.05 by 10.2 cm). The polyethylene bag shall be formed with heat sealed seams that are straight, continuous and parallel to each other and the formed edges of the bag. The unsealed opening shall be at the smaller dimension of the bag. The bag may be fabricated from polyethylene film tubing or sheeting.

5.1.1.2 Intermediate packaging. Six pairs of gloves of one size only, packaged as specified in 5.1.1.1, shall be placed flat in a snug-fitting folding paperboard box conforming to variety 1, style III, type G, class 1, group I of PPP-B-566; or set-up paperboard box conforming to type I, variety 1, class A, style 4 of PPP-B-676. Box closure shall be secured with 2-inch (5.0 cm) minimum width gummed paper tape conforming to type III, grade A of PPP-T-45, applied at the center of the length opening and extending along the bottom and up the sides at least 1 inch (2.5 cm).

5.1.2 Commercial packaging. Gloves shall be packaged to afford adequate protection against deterioration and physical damage during shipment from the contractor to the first receiving activity. The package and the quantity per package shall be the same as that normally used by the contractor for retail distribution.

5.2 Packing. Packing shall be level B or commercial as specified (see 6.2).

5.2.1 Level B packing. One hundred and eight pairs of gloves of one size only, packaged as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC, type CF (variety SW) or SF, class domestic, grade 200 of PPP-B-636. Each shipping container shall be closed in accordance with method II as specified in the appendix of the container specification except that the inspection shall be in accordance with 4.4.4. Toward the end of the contract, or when there are less than the required amount per shipping container of the same size, mixed sizes may be packed within the same container.

5.2.2 Commercial packing. Gloves, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. The quantity per

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:11Z
Check the source to verify that this is the current version before use.

shipping container shall be the same as that normally used by the contractor for retail distribution. Containers shall comply with the US Postal Service Manual, Uniform Freight Classification or National Motor Freight Classification, as applicable.

5.3 Marking. In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with MIL-STD-129.

5.3.1 Polyethylene bagged packages. Unit packages shall have the required identification information legibly printed or stamped in black directly on the bag across the center face or on a white paper label inserted within the bag so as to permit ready identification.

5.3.2 Labels, mixed sizes. Each shipping container, packed with mixed sizes, shall have securely attached to the end and side, directly under the printing or stenciling, a white paper label 5 by 4 inches (12.7 by 10.2 cm) with the words "MIXED SIZES" plainly printed or stamped thereon, and under these words shall be legibly printed or stamped the correct quantities and sizes contained therein.

6. NOTES

6.1 Intended use. The gloves are intended for wear by members of the Girl's Jr. R.O.T.C.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number and date of this specification.
(b) Size required (see 1.2).
(c) When a first article is required (see 3.2, 4.3 and 6.4).
(d) Level of preservation-packaging and packing (see 5.1 and 5.2).

6.3 Guide samples. For access to guide samples address the procuring office issuing the invitation for bids.

6.4 First article. When a first article is required, it shall be inspected and approved under the appropriate provisions of ASPR 7-104.55. The first article shall be a preproduction sample. The first article should consist of one liner, one outer shell before hemming and one pair of completed gloves of each size. The contracting officer should include specific instructions in all procurement instruments regarding arrangements for inspection and approval of the first article.

6.5 Fabric (outer shell). The fabric for the outer shell has been known to stretch when being removed from the roll and then relaxing after being laid out.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:11Z
Check the source to verify that this is the current version before use.

To prevent distortion of cut parts due to relaxation of the fabric, care should be taken to assure the fabric is completely relaxed before cutting the glove parts.

6.6 Supersession data. This specification supersedes the US Army Natick Laboratories (Now US Army Natick Research and Development Command) Purchase Description No. 383, dated 3 March 1975.

Custodian:

Army - GL

Review activities:


Army - MD
DSA - CT

Preparing activity:


Army - GL

Project No. 8445-A063

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:11Z
Check the source to verify that this is the current version before use.

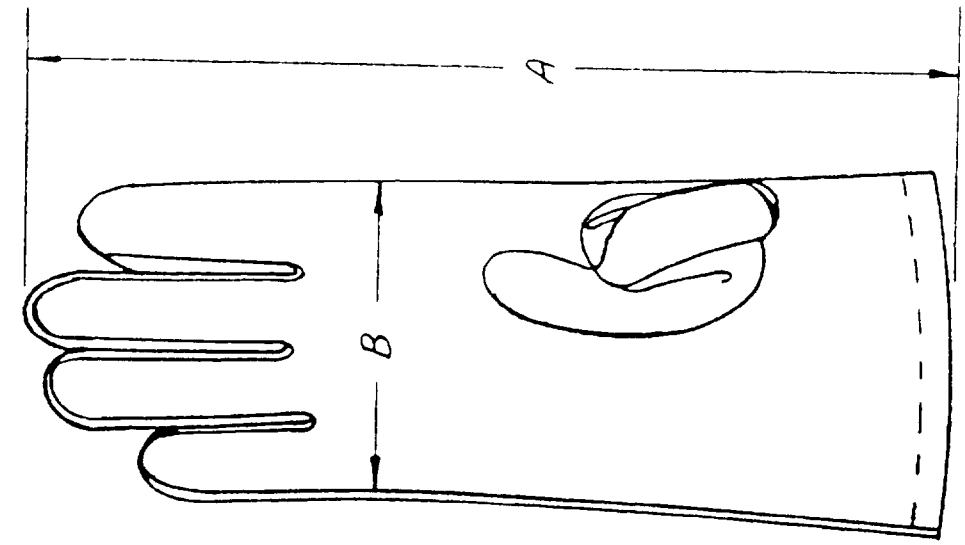

FACE

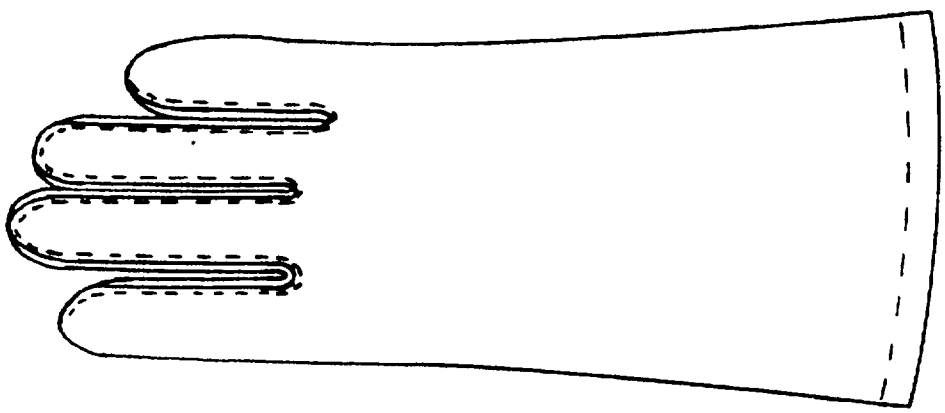

BACK

FIGURE 1 GLOVE, CLOTH, BLACK, LINED, GIRL'S, JR. R.O.T.C.

☆ U. S. GOVERNMENT PRINTING OFFICE: 1977-703-020/458

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:11Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:11Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL	OMB Approval No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

NAME OF ORGANIZATION AND ADDRESS	CONTRACT NUMBER
	MATERIAL PROCURED UNDER A ☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?
   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*	TELEPHONE NO.
	DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 68 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:11Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY
US ARMY NATICK RESEARCH and DEVELOPMENT COMMAND
NATICK, MASSACHUSETTS 01760

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300
DRXNM-TD

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD – 314

U.S. MAIL

Commander
US Army Natick Research and Development Command
ATTN: DRXNM-TD
Natick, MA 01760

NATICK OP 1 Apr 76

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:11Z
Check the source to verify that this is the current version before use.