MIL-S-43929B
1 September 1978
SUPERSEDING
MIL-S-43929A
29 September 1977

MILITARY SPECIFICATION

SHIRT, UTILITY, (DURABLE PRESS)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for polyester/cotton durable press utility shirts.

* 1.2 Classification. The shirts are of the following types and sizes as specified (see 6.2):

Type I - Olive Green 507 (see 6.1)
Type II - Blue 1577 (see 6.1)

Schedule of sizes

Neck size	Sleeve length
13-1/2	30, 32
14-1/2	31, 33, 34, 35, 36
15-1/2	31, 33, 35, 36, 37
16-1/2	32, 34, 36, 38
17-1/2	32, 34, 36
18	35

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: US Army Natick Research and Development Command, Natick, MA 01760, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 8405

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:02Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

V-B-871	-	Button, Sewing Hole, and Button, Staple, (Plastic)
V-T-280	-	Thread, Gimp Cotton, Buttonhole
UU-P-268	-	Paper, Kraft, Wrapping
DDD-L-20	-	Label: For Clothing, Equipage, and Tentage (General Use)
PPP-B-636	-	Boxes, Shipping, Fiberboard

MILITARY

MIL-T-43548	-	Thread, Polyester, Cotton-Covered
MIL-C-43791	-	Cloth, Twill, Polyester/Cotton (Durable Press)

STANDARDS

FEDERAL

FED-STD-751	-	Stitches, Seams, and Stitchings

MILITARY

MIL-STD-129	-	Marking for Shipment and Storage
MIL-STD-1492	-	Provisions for Evaluating Quality of Shirts

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

AMERICAN ASSOCIATION OF TEXTILE CHEMISTS AND COLORISTS

Technical Manual of the American Association of Textile Chemists and Colorists

(Application for copies should be addressed to the American Association of Textile Chemists and Colorists, Research Triangle Park, P.O. Box 12215, Durham, NC 27709.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:02Z
Check the source to verify that this is the current version before use.

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Application for copies should be addressed to the American Trucking Associations, Inc., Traffic Department, 1616 P Street, N. W., Washington, DC 20036.)

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, IL 60606.)

TEXTILE COLOR CARD ASSOCIATION

Standard Color Card of America, 9th Edition

(Application for copies should be addressed to the Textile Color Card Association of the United States, Inc., 200 Madison Avenue, New York, NY 10016.)

3. REQUIREMENTS

3.1 Guide sample. Samples, when furnished, are solely for guidance and information to the contractor (see 6.3). Variation from the specification may appear in the sample, in which case the specification shall govern.

* 3.2 Material (see 6.7).

* 3.2.1 Basic material. The basic material for the type I shirt shall be Olive Green 507, and shall conform to type II, class 1 of MIL-C-43791. The basic material for the type II shirt shall be Blue 1577 and shall conform to type I or II, class 1 of MIL-C-43791.

3.2.2 Thread. The thread for seaming, stitching, buttonholes, and button sewing shall be cotton-covered polyester thread ticket Nos. 50 and 70 for seaming and stitching and 30, 3 ply for sewing on buttons. The thread shall conform to MIL-T-43548.

* 3.2.2.1 Color and colorfastness. The color of the thread shall be Olive Drab S-1, C.A. 66022 for the type I shirt and Navy Blue AT, C.A. 66060 for the type II shirt. The thread shall show colorfastness to laundering, perspiration, and light equal to or better than the standard sample. When no standard sample is available, the dyed thread shall show "good" fastness to laundering, perspiration, and light.

* 3.2.3 Gimp. The cotton gimp for reinforcing buttonholes shall conform to type I or II, size No. 8 of V-T-280. The color shall be Olive Drab S-1, C.A. 66022 for the type I shirt and Navy Blue AT, C.A. 66060 for the type II shirt.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:02Z
Check the source to verify that this is the current version before use.

* 3.2.4 Buttons. The buttons shall conform to type II, class D, style 26, 30-line of V-B-871. The buttons shall have a dull finish and the color shall be Olive Green BP, Cable 62016 for the type I shirt and Blue BV, C.A. 62003 for type II shirt.

3.2.5 Labels. Each shirt shall have an identification label, a size label, and an instruction label conforming to type I of DDD-L-20. The fastness to laundering requirements of DDD-L-20 shall apply.

3.2.5.1 Identification label. The identification label shall conform to class 1.

3.2.5.2 Size label. The size label shall conform to class 2. The size label shall indicate the neck size and the sleeve length.

3.2.5.3 Instruction label. The instruction label shall conform to class 3 except that the label cloth shall be dyed Lemon Yellow, Cable No. 70205, in conformance with the Standard Color Card of America. The label shall contain the following information:

SHIRT, UTILITY (DURABLE PRESS)

WASHING INSTRUCTIONS

1. Machine washing. Use wash and wear cycle. Wash with warm water 120°F (49°C), using soap or mild detergent.

   Heavy stains may require pre-soaking or pre-spotting.

2. Hand washing. Wash in warm water, using soap or mild detergent.

   DO NOT WRING OR TWIST

3. DO NOT STARCH OR BLEACH

4. Dry in tumble dryer at warm setting. Remove immediately at end of drying. Shape and hang. To drip dry, remove from water before last spin cycle. Shape and hang.

5. If touch-up is required, iron at moderate or synthetic heat setting.

DO NOT REMOVE THIS LABEL

3.2.5.4 Combination identification-instruction label. The identification label and the instruction label may be combined into one label. When combined the color of the label shall conform to the requirements of the instruction label (3.2.5.3) and the item nomenclature shall not be repeated. The coating of the class 3 label shall apply.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:02Z
Check the source to verify that this is the current version before use.

3.3 End item appearance.

3.3.1 Appearance and soil release ratings. The finished cured shirt, after five washings, shall meet the ratings for the characteristics specified below, when tested as specified in 4.2.2.

Characteristic	Appearance rating
Cloth appearance	4
Sleeve crease appearance	4
Seam appearance (min. individual rating)	
Armhole	3
Side	3
Underarm	3
Pockets	3
Collar	3
Cuff	3
Soil release (min. individual rating)	3

3.3.2 Shade. The shade of the finished cured shirt shall match the standard sample when tested as specified in 4.2.2.

3.4 Tear strength of finished cured shirt. The finished cured shirt shall meet the physical requirement for tearing strength as specified for the type II, class 1 cloth when tested as specified in MIL-C-43791 (see 4.2.2).

* 3.5 Design. The shirt is single-breasted with collar, two patch pockets with button-through flaps, straight cut bottom, and cuffed sleeves. The shirt has a button closure at neck. (See figure 1 or 2, as applicable.)

* 3.5.1 Figures. Figures 1 and 2 are furnished for information purposes only. To the extent of any inconsistencies between the written specification and the figure, the written specification shall control.

3.6 Patterns. Standard patterns, to be used to cut working patterns, will be furnished by the Government. The working patterns shall be identical to the Government patterns which shall not be altered in any way. The patterns provide a 1/4 inch (6 mm) seam allowance for pocket flaps, sleeve openings, cuffs, and collars and 3/8 inch (10 mm) seam allowance for all other seams.

3.6.1 Pattern parts. The component parts of the shirt shall be cut from the specified material in accordance with pattern parts indicated in table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:02Z
Check the source to verify that this is the current version before use.

* TABLE I. List of pattern parts

Material	Nomenclature of pattern parts	Cut parts
Basic material	Front	2
	Back	1
	Collar	2
	Sleeve	2
	Cuff	4
	Breast patch pocket (type I shirt)	2
	Breast patch pocket (type II shirt)	2
	Pocket flap (type I shirt)	2
	Pocket flap (type II shirt)	2

3.7 Construction.

3.7.1 Stitches, seams, and stitching. Stitch, seam, and stitching types specified in table II shall conform to FED-STD-751. Whenever two or more methods of seaming or stitch types are given for the same part of the operation, any one of them may be used. Where stitch type 401 is used, the looper (under-thread) shall be on the inside of the shirt. Seams shall be sewn so that no raw edges, run-offs, twists, pleats, puckers, or open seams shall result (see 6.4). Edge stitching and raise stitching shall be uniformly gaged throughout the shirt. The gage of safety stitching shall be 3/8 inch (10 mm). The guides and knives on safety stitch machines shall be set to trim only the ravelled edges of the fabric.

3.7.2 Thread breaks and ends of seams. Ends of all seams and stitchings produced with 301 stitch type when not caught in other seams or stitching shall be backtacked not less than 1/4 inch (6 mm), except where otherwise specified in table II. Ends of a continuous line of stitching shall overlap not less than 1/2 inch (13 mm), except that the ends of label stitching shall overlap not less than three stitches. Thread breaks (all stitch types) shall be secured by stitching back of the break not less than 1/2 inch (13 mm). Skipped stitches or thread breaks on the 401 stitch type may be repaired using 301 stitch type.

3.7.3 Stitches per inch (stitches/cm). The minimum and maximum number of stitches per inch (stitches/cm) shall be as specified in table II.

3.7.4 Buttonholes. The buttonholes shall be the eyelet-end taper-bar type worked over No. 8 gimp, with the end tacked, and shall have a cut length of 3/4 to 7/8 inch (19 to 22 mm). The bar end of buttonholes shall have a minimum of four tacks not counting the first cross-over stitch in that it is part of the buttonhole, not the bar. The purling shall finish toward the outside of the shirt.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:02Z
Check the source to verify that this is the current version before use.

3.8 Manufacturing operations requirements. The shirts shall be manufactured in accordance with the operation requirements specified in table II. The contractor is not required to follow the exact sequence of operations shown with the exception of operations 19 through 22 which shall be performed in the sequence listed. Any basting or holding stitching required to facilitate manufacture is permissible provided the thread does not show on the completed shirt.

3.8.1 Marking. The cut parts of the shirt shall be marked to insure a uniform shade and size throughout the shirt. Any method of marking may be used except:

a. Corrosive metal fastening devices.
b. Sew-on type tickets.
c. Adhesive type tickets which discolor the material or leave traces of paper or adhesive on the material after removal of the tickets.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:02Z
Check the source to verify that this is the current version before use.

TABLE II

NO	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
1	Cutting. a. Spread the material without tension. The cut parts from the top and bottom plies shall match and correspond to the pattern. The face of the fabric shall finish on the outside of the shirt. b. Cut the shirts in strict accordance with patterns furnished which show directional lines, size, placement of pockets, and notches for proper assembly of all parts. Directional lines shall be placed in the warp direction. The fronts shall be cut with the edge of the grown-on facings on the selvage. c. The top collar and undercollar may be cut in the warp or filling direction. d. Cut all parts of the garment out of one piece of material except the undercollar, sleeve bindings, and cuff linings which may be cut from ends. Parts cut from ends shall approximate the shade of the other parts. e. Cut sleeve binding from basic material, to finish 1/2 to 5/8 inch (13 to 16 mm) wide (see operation 10a) and of sufficient length to bind the sleeve opening with the long dimension cut in the warp direction; or the binding may be strip-cut (warp direction) and placed on rolls.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:02Z
Check the source to verify that this is the current version before use.

NO.	TABLE II (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
2.	Marking. Mark, ticket, or bundle all parts of the shirt except those cut from ends to insure correct size and uniform shade throughout the garment.						
3.	Replacement of defective components. Care shall be exercised during the spreading, cutting, and manufacturing operations to assure that material defects and damages as specified in MIL-STD-1492 are excluded and replaced with non-defective and properly matched material.						
4.	Labeling.						
	a. Position size label on center back not more than 5/8 inch (16 mm) below neck edge (1/4 inch (6 mm) off center tolerance) and stitch on all four sides. The stitching shall not be through the printing. The label may be positioned so that the top of the label will be caught in the collar joining seam (see operation 12e).	301	LSbj-1	8-10 (3-4)	50	50	
	b. Position the identification label on the bottom of the left facing with the bottom of the label 2-1/2 ± 1/2 inches (64 ± 13 mm) from bottom of finished shirt, and stitch on all four sides.	301	LSbj-1	8-10 (3-4)	50	50	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:02Z
Check the source to verify that this is the current version before use.

TABLE II (cont'd)

NO	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
4.	Labeling. (cont'd)						
	c. Position the yellow instruction label on the bottom right facing with either the side or bottom edge of the label 1-1/2 ± 1/2 inches (38 ± 13 mm) from bottom of finished shirt and 1/8 to 1/4 inch (3 to 6 mm) from front of finished shirt, and stitch on all four sides. On the smaller size shirts, the label may extend beyond the back edge of facing, in which case the label shall be stitched on three sides, leaving the extended side open. The stitching shall not be through the printing.	301	LSbj-1	8-10 (3-4)	50	50	
	d. The yellow combination label, when used, shall be positioned the same as the instruction label (operation 4c) and stitched on all four sides, except if label extends beyond back edge of facing on the smaller sizes, the label shall be stitched as specified in 4c. The stitching shall not be through the printing.	301	LSbj-1	8-10 (3-4)	50	50	
5.	Make cuffs.						
	Finished appearance. The cuffs shall finish flat and smooth without pleats, puckers, or raw edges						
	a. Seam cuff to cuff lining along sides and bottom edge.	301 or 401	SSe-2(a)	8-10 (3-4)	50 50	50 70	
	b. Trim corners, turn, and work out edges.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:02Z
Check the source to verify that this is the current version before use.

NO	TABLE II (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
5.	Make cuffs. (cont'd)						
	c. Edge stitch, 1/16 to 1/8 inch (1.5 to 3 mm) from bottom and side turned edges, with stitching terminating 7/8 to 1 inch (22 to 25 mm) from top raw edge on both sides or the edge stitching may taper to edge of cuff at ends of stitching. (If stitching is tapered, it need not be backtacked.)	301	SSe-2(b)	8-10 (3-4)	50	50	
	d. Make one horizontal buttonhole in each cuff as indicated by mark on pattern, centered on cuff (1/8 inch (3 mm) off center tolerance) with the inside edge of eyelet 1/2 ± 1/8 inch (13 ± 3 mm) from side edge.	Buttonhole		52-56 per buttonhole	50	50	
6.	Make collar.						
	a. Seam collar pieces together along outside edges.	301 or 401	SSe-2(a)	8-10 (3-4)	50 50	50 70	
	b. Trim corners, turn, work out edges and points, and edge stitch, 1/16 to 1/8 inch (1.5 to 3 mm) from edges.	301	SSe-2(b)	8-10 (3-4)	50	50	
	Make pocket flaps.						
	a. Fold flap in half, stitch sides and bottom leaving a portion open for turning.	301 or 401	SSe-2(a)	8-10 (3-4)	50 50	50 70	
	b. Trim corners, turn flap through opening, work out corners and edges, and edge stitch sides and bottom edges, 1/16 to 1/8 inch (1.5 to 3 mm) from turned edge.	301	SSe-2(a)	8-10 (3-4)	50	50	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:02Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:02Z
Check the source to verify that this is the current version before use.

TABLE II (cont'd)

NO	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
7.	Make pocket flaps. (cont'd)						
	or						
	c. Fold flap in half, turn sides and bottom edges to the inside, and stitch 1/16 to 1/8 inch (1.5 to 3 mm) from edges.	301	SSc-1	8-10 (3-4)	50	50	
	d. Make a vertical buttonhole in center of flap, 1/8 inch (3 mm) off center tolerance, with inside edge of eyelet 1/2 to 5/8 inch (13 to 16 mm) from pointed (type I), and bottom (type II) edges of flaps.	Buttonhole		52-56 per buttonhole	50	50	
8.	Make and sew on patch pockets.						
	a. Overedge top raw edge of pockets. Fold top as indicated by marks on pattern, and press, forming hem. The hem shall finish 1-3/4 ± 1/8 inches (44 ± 3 mm) wide.	502 or	EFd-1	6-8 (2-1/2-3)	50	50	
		503	EFd-1	6-8 (2-1/2-3)	50	50	
	b. Turn side and bottom edges and stitch pockets on fronts, as indicated by marks on patterns, 1/16 to 1/8 inch (1.5 to 3 mm) from edge. The pockets may be precreased.	301	LSd-1	8-10 (3-4)	50	50	
9.	Sew on pocket flaps.						
	a. Position flaps on shirt as indicated by marks on pattern and stitch to shirt 1/16 to 1/8 inch (1.5 to 3 mm) from edge with stitching terminating at front and back edges of flap (-0, +1/8 inch (3 mm). The stitching on the left flap shall terminate 2-3/8 ± 1/8 inches (60 ± 3 mm) from the front edge.	301	LSbj-1	8-10 (3-4)	50	50	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED

TABLE II (cont'd)

NO	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
9.	Sew on pocket flaps. (cont'd)						
	b. Bartack top of left pocket flap forming pencil openings, with three vertical bartacks 1/4 to 3/8 inch (6 to 10 mm) long, positioned as follows: (1) First bartack on front edge, superimposed on edge stitching. (2) Third bartack at the termination of flap joining seam, 2-3/8 ± 1/8 inches (60 ± 3 mm) from front edge of flap. (3) Second bartack centered between the first and third bartacks, 1/8 inch (3 mm) off center tolerance permitted.	Bartack		28 per bartack	50	50	
10.	Make sleeve openings.						
	a. Fold binding in half lengthwise, turn the raw edges to the inside with the edge of the sleeve opening inserted, and stitch.	301	BSc-1	8-10 (3-4)	50	50	
	or						
	b. Seam binding to edge of sleeve opening on the underside. Fold binding over edge of opening with the raw edge of binding turned in, and stitch to sleeve.	301 or 401 and 301	BSg-2	8-10 (3-4)	50 50 50	50 70 50	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:02Z
Check the source to verify that this is the current version before use.

TABLE II (cont'd)

NO	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
10.	Make sleeve openings (cont'd)						
	c. Turn bound sleeve opening to inside of sleeve and stitch, bartack, or line tack through binding and sleeve 1/8 to 1/4 inch (3 to 6 mm) below top of opening the full width of the binding. The bartack or line tack may be 1/2 inch (13 mm) long. An automatic line tack may be used.	301 or		8-10 (3-4)	50	50	
		bartack		28 per bartack	50	50	
		or 301 line tack		28 per tack	50	50	
11.	Join shoulder seams.						
	Join fronts to backs at shoulder with a safety stitch.	515 or 516 or 519	SSa-2	8-10 (3-4)	50 chain	70 stitching	
					70 overedge	70 stitching	
12	Join collar to shirt.						
	a. Overedge stitch the selvaged edge of facing if selvage is cut or frayed.	502 or	SSa-1	6-8 (2-1/2-3)	50	50	
		503			50	50	
	b. Fold facing back at notch.						
	c. Insert collar between fronts at collar notch.						
	d. Stitch across step and gorge to a point 1-3/4 to 2 inches (44 to 51 mm) from shoulder seam. Seam undercollar to neck of shirt. (Shoulder seams shall be turned toward back.)	301	SSe-2(a) and	8-10 (3-4)	50	50	
		301	SSa-1	8-10 (3-4)	50	50	
	or						
	Stitch across step and gorge to a point 1-3/4 to 2 inches (44 to 51 mm) from shoulder seam and notch collar through facings and fronts. Seam under collar to neck of shirt. (Shoulder seams shall be turned toward back.)	301	SSa-1	8-10 (3-4)	50	50	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:02Z
Check the source to verify that this is the current version before use.

NO	TABLE II (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
12.	Join collar to shirt. (cont'd)						
	e. Turn facing, work out steps. Insert top of facing inside of collar, turn in the unsewn portion of the top collar and stitch to neck through undercollar; or stitching may be adjacent to undercollar stitching. The top of the size label (operation 4a) may be caught in the collar joining seam. Continue stitching around sides and bottom of label.	301 301	LSb-1 and LSbj-1	8-10 (3-4) 8-10 (3-4)	50 50	50 50	
* 13.	Bartack pockets.						
	Bartack patch pockets at each end of pocket opening with 1/4 to 3/8 inch (6 to 10 mm) vertical bartacks superimposed on the pocket stitching. Bartacks shall catch facings wherever possible.	Bartack		28 per bartack	50	50	
14.	Set in sleeves.						
	Join sleeves to shirt with a safety stitch. (Shoulder seams shall be toward back.)	515 or 516 or 519	SSa-2	8-10 (3-4)	50 chain stitching 70 overedge stitching	70 70	
15.	Join side seams and sleeve seams.						
	Join side and underarm seams in a continuous operation with a safety stitch. Ends of armhole seam shall not be staggered by more than 1/2 inch (13 mm). Armhole seam allowance shall be turned toward sleeve.	515 or 516 or 519	SSa-2	8-10 (3-4)	50 chain stitching 70 overedge stitching	70 70	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:02Z
Check the source to verify that this is the current version before use.

TABLE II (cont'd)

NO	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
16.	Join cuff to sleeve.						
	a. Position cuff lining to sleeve bottom on inside and join cuff lining to sleeve with the bound edge of the sleeve opening turned to inside at buttonhole end of cuff and caught in the stitching. (Underarm seam allowance shall be turned toward back.)	301 or 401	SSa-1	8-10 (3-4)	50 50	50 70	
	b Turn cuff down and turn in seam allowance of cuff and stitch cuff to sleeve 1/16 to 3/32 inch (1.5 to 2 mm) from turned-in edge of cuff. The cuff joining stitch may be through cuff lining or adjacent to cuff lining.	301		8-10 (3-4)	50	50	
17	Hem bottom of shirt.						
	Turn up bottom of shirt with the raw edge turned in and stitch 1/16 to 1/8 inch (1.5 to 3 mm) from folded edge; continue stitching across the ends of hem 1/16 to 1/8 inch (1.5 to 3 mm) from front edges. Finished hem shall measure 3/4 ± 1/4 inch (19 ± 6 mm) wide. Hem ends shall not extend beyond front edges of shirt. (Side seam allowances shall be turned toward the back.)	301 301	LFb-1 and SSa-1	8-10 (3-4) 8-10 (3-4)	50 50	50 50	
	Buttonholes.						
	a. Mark position for buttonholes on left front as indicated by pattern.						
	b. Make a horizontal buttonhole at each mark with the inside edge of eyelet 1/2 to 5/8 inch (13 to 16 mm) from front edge with the ends tacked. Buttonholes shall be equally spaced.	Buttonhole		52-56 per buttonhole	50	50	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:02Z
Check the source to verify that this is the current version before use.

TABLE II (cont'd)

NO	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
19.	Clean shirts. a. Trim all ends of thread and remove loose threads. Remove all spots, stains, and shade markings. b Before folding and packaging, shirts must be free of residual fiber particles, lint, and dust or other foreign material.						
20.	Press shirts. Finished appearance. The pressing conditions with regard to time, temperature, steaming, and head pressure shall be adequate to obtain required results. a. Press entire shirt with underarm seam at bottom edge of sleeve, crease top edge from crown to bottom of cuff.						
21.	Curing. The pressed shirt shall be suspended on a shirt hanger, with the collar spread open and lapels rolled back with the collar covering the under-collar joining seam and shall be subjected to dry oven heat. The temperature and time of curing conditions shall be adequate to obtain required results. After curing, the shirts shall be left on the hangers until the shirts have cooled to room temperature.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:02Z
Check the source to verify that this is the current version before use.

TABLE II (cont'd)

NO	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
22.	Sew on buttons.						
	a. Position the buttons on the outside of the right front 3/4 ± 1/8 inch (19 ± 3 mm) in from the edge (measured from center of button) to correspond with the eyelet end of buttonholes in left front.	101 or		14-16 per button	30		
		301		14-16 per button	30	30	
	b Sew a button on each pocket to correspond with the eyelet end of flap buttonholes.	101 or		14-16 per button	30		
		301		14-16 per button	30	30	
	c Sew one button to each sleeve cuff through cuff and cuff lining to correspond to eyelet end of buttonhole and positioned 5/8 ± 1/8 inch (16 ± 3 mm) from side edge.	101 or		14-16 per button	30		
		301		14-16 per button	30	30	
	NOTE: Operation 22 may be performed prior to curing (operation 21) provided the impression of buttons does not show on the finished (cured) shirt.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:02Z
Check the source to verify that this is the current version before use.

3.9 Measurements. Finished measurements shall be as shown in table III.

TABLE III. Finished measurements in inches (mm)

Sizes	13-1/2	14-1/2	15-1/2	16-1/2	17-1/2	18	Tolerance
One half chest 1/	20 (508)	22 (554)	24 (610)	26 (660)	28 (711)	29 (737)	± 3/4(19)
Back length 2/	28-3/8 (721)	29-3/8 (746)	30-3/8 (772)	31-3/8 (797)	32-3/8 (822)	32-1/2 (825)	+ 1/2(13) - 1 (25)
Sleeve length 3/	1/2 inch (13 mm) over marked size						± 3/4(19)

1/ Chest measurement shall be taken with shirt buttoned, at a point in line with pit of armhole, from folded edge to folded edge.

2/ Back length shall be taken along center of back from undercollar seam to bottom edge of shirt.

3/ Sleeve length shall be taken from center back of shirt at undercollar seam diagonally across back and along sleeve to bottom edge of sleeve.

3.10 Workmanship. The finished shirt shall conform to the quality of product established by this specification. The occurrence of defects shall not exceed the applicable acceptable point values or defect limits.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Quality conformance inspection. Sampling and examination of the end item shall be performed in accordance with MIL-STD-1492 except that the shirts shall be inspected in accordance with the 'SD" semi-dress classification and the sampling provisions shall be in accordance with table IV below in lieu of the "SD" sampling provisions table in MIL-STD-1492. As a final step in the contractor's production

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:02Z
Check the source to verify that this is the current version before use.

control plan before formation of a lot, after pressing, and prior to folding for packaging, each shirt shall be buttoned, laid out flat on a table, and examined for the following selected defects:

Hole, cut, tear, smash, burn, drill hole, scorched area, multiple float, or open place on outside more than 1/4 inch (6 mm).
Variation in shade within an outside part or between outside parts.
Collar points uneven in length by more than 3/8 inch (10 mm).
Puckering or bulging due to misalignment of buttons.
Pressing omitted or double crease line.
Pocket or flap out of alignment by more than 1/2 inch (13 mm).
Pocket edge not parallel to front edge of shirt by more than 3/8 inch (10 mm).

A shirt containing any of the above selected defects shall not be included in the end item lot. Selected defects found during the end item sampling inspection shall be cause for rejection of the lot when the "Maximum acceptance number for selected defects" specified in table IV is exceeded.

* TABLE IV. Sampling provisions for shirts

	Lot size	Sample size	Maximum acceptance number for selected defects	Maximum acceptable point values: 3 & 2 point defects	Maximum acceptable point values: 3, 2 & 1 point defects
Normal inspection	Up thru 500	50	0	12 points	23 points
	501 thru 1200	80	0	16 points	32 points
	1201 thru 3200	125	1	23 points	46 points
	3201 thru 10,000	200	1	32 points	66 points
	10,001 thru 35,000	315	2	45 points	95 points
	35,001 and over	500	3	68 points	140 points

	Lot size	Sample size	Maximum acceptance number for selected defects	Maximum acceptable point values: 3 & 2 point defects	Maximum acceptable point values: 3, 2 & 1 point defects
Tightened inspection	Up thru 500	50	0	7 points	16 points
	501 thru 1200	80	0	10 points	24 points
	1201 thru 3200	125	1	16 points	34 points
	3201 thru 10,000	200	1	26 points	51 points
	10,001 thru 35,000	315	2	39 points	78 points
	35,001 and over	500	3	58 points	117 points

	Lot size	Sample size	Maximum acceptance number for selected defects	Maximum acceptable point values: 3 & 2 point defects 1/	Maximum acceptable point values: 3, 2 & 1 point defects
Reduced inspection	Up thru 1200	32	0	8-15 points	25 points
	1201 thru 3200	50	0	10-20 points	32 points
	3201 thru 10,000	80	0	17-26 points	43 points
	10,001 thru 35,000	125	0	23-32 points	54 points
	35,001 and over	200	1	32-41 points	75 points

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:02Z
Check the source to verify that this is the current version before use.

1/ If the first value is exceeded but the second value has not been exceeded, accept the lot but reinstate normal inspection. The second value is the maximum acceptable point value.

4.2.1 Component and material inspection. In accordance with 4.1 above, components and material shall be inspected in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document.

* 4.2.2 End item testing. The finished cured shirts shall be tested as specified in table V. All test reports shall contain the individual values utilized in expressing the final result. The lot size shall be expressed in units of one shirt. The sample unit shall be two finished shirts. Two unlaundered shirts shall be used for determining shade and tear strength and the remaining shirt shall be laundered and used to perform the remaining tests. The sample size shall be as specified below.

Lot size	Sample size
800 or less	5
801 to 22,000 inclusive	8
22,001 and over	13

The lot shall be unacceptable if the sample fails to meet any of the following conditions:

a. For cloth appearance and sleeve crease appearance: Two-thirds or more of the individual ratings for each characteristic shall be 4 or above and no single rating shall fall below 3. 1/

b. For seam appearance and soil release: No single rating shall fall below 3.

c. For shade and tearing strength: No specimen shall fail to meet the specified requirement.

1/ The lot rating for each characteristic shall be determined from the total ratings assigned for that characteristic in each inspection lot, i.e., in a sample size of eight shirts, the appearance rating for each characteristic indicated above shall be based upon the total of 24 values assigned for that characteristic (three judgements for each of the eight shirts).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:02Z
Check the source to verify that this is the current version before use.

TABLE V. End item testing

Characteristic	Requirement paragraph	Test method
Cloth appearance rating	3.3.1	4.3.1
Soil release rating	3.3.1	4.3.1
Seam appearance rating	3.3.1	4.3.1
Crease retention rating	3.3.1	4.3.1
Shade	3.3.2	1/
Tearing strength	3.4	2/

1/ The shade of the finished cured shirt shall match the standard sample under artificial daylight having a color temperature of 7500 kelvin and shall be a good approximation to the standard sample under incandescent lamplight at 2800 kelvin.

2/ Test in accordance with the cured fabric requirements of MIL-C-43791. This test shall be performed after curing but prior to laundering.

4.3 Test methods.

4.3.1 Tests for appearance and soil release.

4.3.1.1 Apparatus and material used for laundering. The following apparatus and material are required for laundering:

a. Automatic washing machine (see 6.5).
b. Automatic dryer (see 6.5).
c. AATCC Standard Detergent 124 or equivalent.
d. Mineral Oil: Nujol, Plough Inc., Memphis TN, or equivalent.
e. AATCC standard blotting paper or equivalent.
f. 5-pound (2 kg) weight, 2-1/2 inches (64 mm) diameter.
g. 3 by 3 inch (76 by 76 mm) piece of polyethylene film.
h. Eyedropper.
i. Dummy pieces for ballast - 3 feet by 3 feet (1 m by 1 m) hemmed pieces of the basic material to be added to test shirts to make a 4-pound (1.8 kg) load.

4.3.1.2 Apparatus and material used for evaluation. The following apparatus and material are required for evaluation of samples:

a. Apparatus for overhead and side lighting procedure as specified in AATCC Test Methods 124-1975 and 88C-1970.
b. AATCC three dimensional Durable Press Replicas.
c. AATCC photographic standards for evaluating single needle stitching and for evaluating pressed in creases.
d. Deering Milliken photographic standards for evaluating stain release.
e. Non-reflecting black-topped table 35 ± 1 inches (889 ± 25 mm) high and at least 30 inches (760 mm) by 24 inches (610 mm) with the long dimension parallel and adjacent to the viewing board.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:02Z
Check the source to verify that this is the current version before use.

4.3.1.3 Procedure.

4.3.1.3.1 Laundering. If the shirts weigh less than 4 pounds (1.8 kg), ballast to make up a standard 4 pound (1.8 kg) load shall be added to the test shirts. The ballast shall consist of durable press shirts or pieces of the basic fabric. The pieces shall be hemmed and measure 3 feet by 3 feet (1 m by 1 m). The washer shall be set for high water level, warm water temperature, and a 12-minute wash on the wash and wear cycle. The water used shall have a hardness not greater than 50 parts per million (PPM). The wash temperature shall be 115 ± 5°F (46 ± 3°C). When the washer has filled, add 140 g of detergent. Allow the washer to proceed automatically through the final spin cycle. Remove the shirts immediately at the completion of the final spin and separate the shirts and dummy pieces, when required, if tangled. Place the complete washed load in the dryer and dry at the Normal cycle and at a setting which generates an exhaust temperature range of 140 to 160°F (60 to 71°C). Operate the dryer until the load is dry and continue tumbling 5 minutes with the heat turned off (cool-down cycle). Remove the load immediately after the machine stops. Repeat the wash and dry cycle until the load has completed four cycles. At the completion of the fourth cycle, the shirt shall be stained with mineral oil in three different spots on the tail of the shirt. Place the area to be stained on AATCC blotting paper. Using an eye dropper, drop five drops of mineral oil for each spot. Place a 3 by 3 inch (76 by 76 mm) piece of polyethylene film over the oil. Place a 5-pound (2 kg) weight (2-1/2 inches (64 mm) diameter) on the film directly over the oil. Keep the weight in place 60 seconds. Remove the weight and polyethylene film and wipe off the excess oil with clean tissue. Allow the test specimen to hang undisturbed for at least 15 minutes but not more than 2 hours. Return the stained shirts and the dummy pieces, when required, to the washing machine and wash for the fifth (last) complete washing and drying cycle. During conditioning and during interruption of wash dry cycles, the shirt shall be placed on a shirt hanger with all buttons fastened.

4.3.1.3.2 Evaluation. Three trained observers shall evaluate and rate each sample unit for appearance criteria independently of each other. The shirt shall be placed on a clothes hanger with all buttons fastened and mounted on the viewing board with the center of the shirt approximately 5 feet (1.5 m) from the floor and in such a manner that it lies flat on the board. With applicable lighting procedures being used, the observer shall stand in front of the board and at a distance of 4 feet (1.2 m) from it. With the cloth, seam, or crease appearance standards, as applicable, placed on the viewing board, the observer shall rate each shirt according to the appearance standard that most nearly matches the appearance being evaluated on the shirt. No estimation of ratings falling between standards is allowed and the full numerical rating of the nearest standard must be assigned. Evaluation shall be conducted in a room where the only source of light will be that used for observation. To prevent unwanted reflection of light that may interfere with the observation, the walls of the room may be painted a non-reflecting black or blackout curtains may be hung on each side of the viewing area.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:02Z
Check the source to verify that this is the current version before use.

4.3.1.3.2.1 Evaluation of cloth appearance. Overhead lighting procedure and cloth appearance standards shall be used (4.3.1.2). To facilitate comparative testing, the three dimensional plastic replicas that most nearly match the cloth appearance of the shirt shall be mounted on the board on each side of the shirt. The cloth appearance of the shirt shall be observed and compared with the standards. The overall cloth appearance of the shirt, i.e., front and back combined, shall be rated and assigned the numerical value of the appearance replica that most nearly matches it. The rating values assigned by each of the three observers for cloth appearance shall be reported for each sample unit.

4.3.1.3.2.2 Evaluation of seam appearance. Overhead lighting procedure and single needle stitching standards shall be used (4.3.1.2). To facilitate comparative testing, the seam standard shall be mounted on the viewing board to the left of the shirt as viewed. Seams specified in 3.3.1 shall be observed and compared with the standard. The appearance of each seam shall be assigned the numerical value of the standard that most nearly matches it. When rating the underarm and side seams, the shirt should be moved on the hanger so that the side seam is visible. An assistant should raise the sleeve and the underarm and side seam should be evaluated. This procedure should be repeated for the opposite underarm and side seam. The rating values assigned by each of the three observers for each sample unit shall be reported.

4.3.1.3.2.3 Evaluation of soil release. Overhead lighting procedure and the soil release standard shall be used (4.3.1.2). To facilitate comparative testing, the soil release standard shall be mounted and centered on the viewing board 45 inches (1.1 m) from the floor (center). The shirt, with the stained area visible, shall be placed upon the black-topped table and in front of the standard. The shirt stains shall be compared with the standard and shall be assigned the numerical value of the standard that they most nearly match. One rating shall be assigned for all three stains by each observer. The rating values assigned by each of the three observers for each sample unit shall be reported.

4.3.1.3.2.4 Evaluation of crease appearance. Overhead and side lighting procedures and the crease appearance standard shall be used (4.3.1.2). The required side lighting shall be added to the overhead lighting and the shirts evaluated for pressed-in creases. To facilitate comparative testing, the crease appearance standard shall be mounted on the viewing board to the left center of the shirt as viewed. The shirt shall be adjusted as necessary in order that the crease area being evaluated, i.e., sleeves, lies in a relaxed position perpendicular to the side lighting in order to allow proper comparision to the standard. The crease area specified in 3.3.1 shall be compared with the standard and assigned the numerical value of the standard that most nearly matches it. The crease area specified shall be rated on an overall appearance basis and assigned a value accordingly, i.e., sleeve creases shall be rated in accordance with the overall appearance of both sleeves as a unit and not on an individual crease basis. Individual ratings assigned by each of the three observers for the crease specified in 3.3.1 shall be reported for each sample unit.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:02Z
Check the source to verify that this is the current version before use.

*5. PACKAGING

5.1 Preservation-packaging. Preservation-packaging shall be level A or C, as specified (see 6.2).

* 5.1.1 Level A. Each shirt shall be laid flat with the front up. The sleeves shall be placed lengthwise along the sides. The shirt shall then be folded in half the length. The folded shirt shall measure approximately 23 by 14-1/2 inches (584 mm by 368 mm). For the larger sizes, it may be necessary to adjust the sides and fold over the bottom edge to achieve the desired folded dimensions. Ten folded shirts of one type and size only shall be neatly stacked in a bundle and securely tied with cotton tape or twine approximately 4 inches (102 mm) in from each end.

5.1.2 Level C. Shirts shall be preserved-packaged to afford adequate protection against physical damage during shipment from the contractor to the first receiving activity. The package and the quantity per package shall be the same as that normally used by the contractor for retail distribution.

5.2 Packing. Packing shall be level A, B, or C, as specified (see 6.2).

* 5.2.1 Level A packing. Forty shirts of one type and size only, preserved-packaged as specified in 5.1, shall be packed in a fiberboard shipping container conforming to style RSC-L, grade V2s of PPP-B-636. The inside of each shipping container shall be fitted with a box liner conforming to type CF, class weather-resistant, variety DW, grade V15c of PPP-B-636. Shirts, preserved-packaged level A, shall be packed flat, four in depth within a shipping container. Inside dimensions of each shipping container shall approximate 23-1/2 inches (597 mm) in length, 15 inches (381 mm) in width, and 14 inches (356 mm) in depth. Approximate dimensions are furnished as a guide only. Each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight (49 g/m^2) kraft paper conforming to type I, grade B of UU-P-268. Each shipping container shall be closed in accordance with method III, waterproofed in accordance with method V, and reinforced as specified in accordance with the appendix of PPP-B-636, except that the inspection shall be in accordance with 4.2. Toward the end of the contract, or when there are less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container.

* 5.2.2 Level B packing. Forty shirts of one type and size only, preserved-packaged as specified in 5.1, shall be packed in a fiberboard shipping container conforming to style RSC-L, type CF (variety SW) or SF, class domestic, grade 275 of PPP-B-636. The inside of each shipping container shall be fitted with a box liner conforming to type CF, class domestic, variety DW, grade 275 of PPP-B-636. Shirts, preserved-packaged level A, shall be packed flat four in depth within a shipping container. Inside dimensions of each shipping container

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:02Z
Check the source to verify that this is the current version before use.

shall approximate 23-1/2 inches (597 mm) in length, 15 inches (381 mm) in width, and 14 inches (356 mm) in depth. Approximate dimensions are furnished as a guide only. Each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight (49 g/m^2) kraft paper conforming to type I, grade B of UU-P-268. Each shipping container shall be closed in accordance with method II as specified in the appendix of PPP-B-636 except that the inspection shall be in accordance with 4.2. Toward the end of the contract or when there are less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container.

5.2.2.1 Weather-resistant fiberboard container. When specified (see 6.2), the shipping container shall be a grade V3c, V3s, or V4s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with method III as specified in the appendix of the box specification except that the inspection shall be in accordance with 4.2.

5.2.3 Level C packing. Shirts, preserved-packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. The quantity per shipping container shall be the same as that normally used by the contractor for retail distrubution. Containers shall be in accordance with Uniform Freight Classification or National Motor Freight Classification, as applicable.

5.3 Marking. In addition to any special marking required by the contract, intermediate packs (bundles) and shipping containers shall be marked in accordance with MIL-STD-129.

5.3.1 Labels, mixed sizes. Each shipping container, packed with mixed sizes, shall have securely attached to the end and side, directly under the printing or stenciling, a white paper label 5 by 4 inches (127 by 102 mm) with the words "MIXED SIZES" plainly stamped or printed thereon, and under the words shall be legibly stamped or printed the correct quantity and sizes contained therein.

6. NOTES

* 6.1 Intended use. The type I shirt is intended for use by male Military personnel of the Department of Defense as the standard component for use with the Olive Green 507 durable press utility trousers. Type II shirt is intended for use by male Military personnel of the Department of the Air Force who are members of missile combat crews.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:02Z
Check the source to verify that this is the current version before use.

6.2 Ordering data. Procurement documents should specify the following

(a) Title, number, and date of this specification.
(b) Type and sizes required (see 1.2).
(c) Selection of applicable levels of preservation-packaging and packing (see 5.1 and 5.2).
(d) When weather-resistant fiberboard shipping containers are required for level B packing (see 5.2.2.1).

6.3 Samples. For access to samples of the shirt and shade samples, address the procuring activity issuing the invitation for bid.

6.4 Seams. In order to avoid puckering and to produce the flattest seams possible, consideration must be given to the following: The needle should be the smallest possible with a slim point. The smallest throat plate hole possible should be used to prevent flagging. Presser foot pressure should be just enough to insure a steady flow of material. Feed dogs should contain 18 to 20 teeth per inch (7 to 8 teeth/cm) for normal sewing and 20 to 25 teeth per inch (8 to 10 teeth/cm) for stitching down. All attachments should be as smooth as possible to permit free flowing of the fabric through the machine. The lightest possible thread tension should be used while maintaining a good stitch. The upper and lower threads must be balanced. Frequent checks should be made to insure that blunt needles are eliminated and machine adjustments maintained. Experience has shown that the puckering, when sewing with stitch 401, can be reduced considerably, if not eliminated, by the use of needle feed machines, setting the feed one stitch higher than the desired number and the foot one stitch lower.

6.5 Recommended apparatus. The recommended apparatus for 4.3.1.1 a and b are.

a. Kenmore Automatic Washing Machine Model 600 or similar machine. In case of dispute, the Kenmore Model 600 shall be used.
b. Kenmore Automatic Dryer Model 600 or equivalent.

6.6 Resins. Only those durable press resins already approved by the appropriate medical service and so listed in the invitation for bids or request for proposal shall be considered acceptable for the related procurement.

* 6.7 Recycled material. It is encouraged that recycled material by used when practical as long as it meets the requirements of the specification.

* 6.8 Metric equivalents. Metric equivalents, indicated in parentheses throughout this document, are based on practices, conversion factors, and symbols specified in ASTM E 380 Standard for Metric Practice, and are for information only. In each instance, the value stated in US customary units shall be controlling.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:02Z
Check the source to verify that this is the current version before use.

6.9 Changes from previous issue. The margins of this specification are marked with an asterisk (*) to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:

Army - GL
Navy - SA
Air Force - 11

Preparing activity:


Army - GL

Project No. 8405-0790

Review activities:

Army - MD
Navy - MC
Air Force - 99
DLA - CT

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:02Z
Check the source to verify that this is the current version before use.

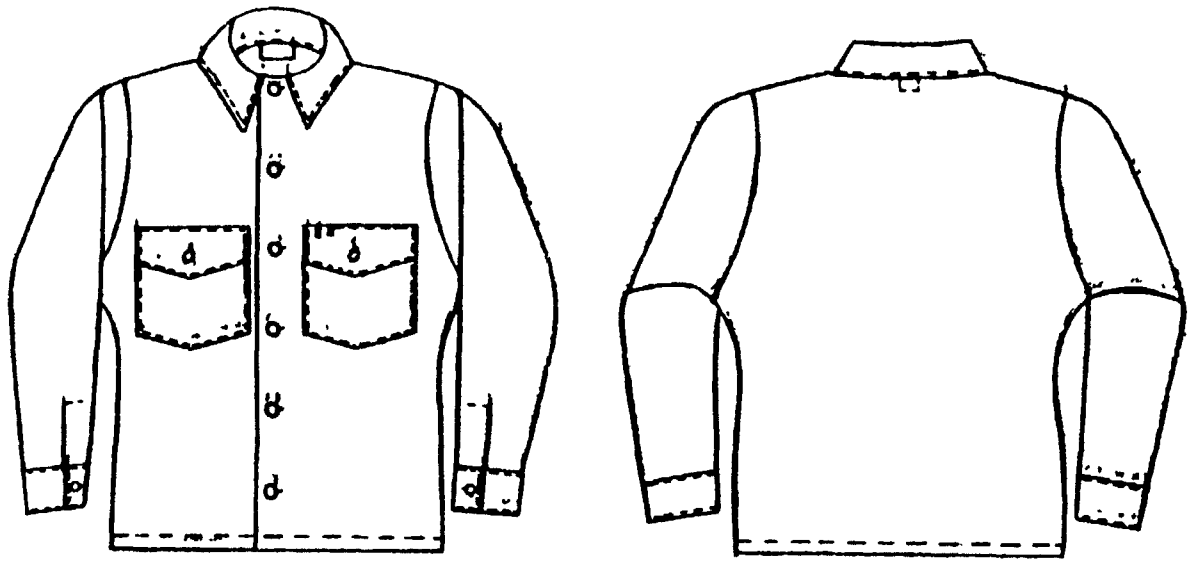

FRONT BACK

FIGURE 1 SHIRT, UTILITY, (DURABLE PRESS)
TYPE I

2-1-1111 B

MIL-S-43929B

29

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:02Z
Check the source to verify that this is the current version before use.

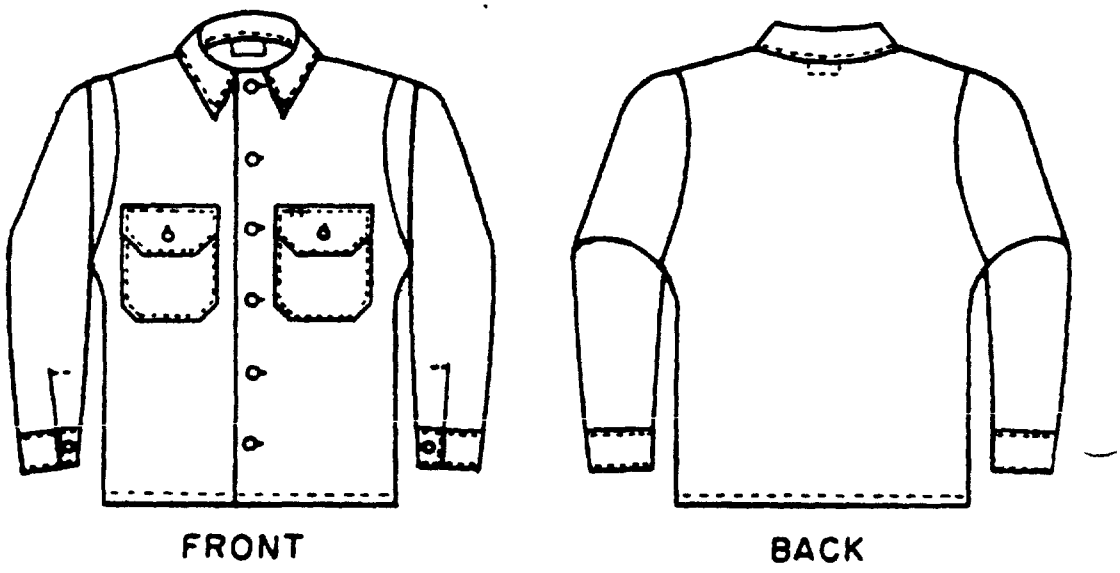


FIGURE 2. Shirt (type II)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:02Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS. In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge (DO NOT STAPLE), and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO 12062 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US Army Natick Research and Development
Laboratories
ATTN: DRDNA-ES (Mr. D. Luppino)
Natick, MA 01760

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:02Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
	☐ USER
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ MANUFACTURER
	☐ OTHER *(Specify)* _____

5 PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording.

c. Reason/Rationale for Recommendation

6 REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8 DATE OF SUBMISSION *(YYMMDD)*

DD FORM 1426 82 MAR PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil – Downloaded: 2026-10-21T23:02Z
Check the source to verify that this is the current version before use.