MIL-T-43932C
3 October 1980
SUPERSEDING
MIL-T-43932B
15 September 1978

MILITARY SPECIFICATION

TROUSERS, UTILITY, (DURABLE PRESS)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for polyester/cotton durable press utility trousers.

* 1.2 Classification. The trousers shall be of one type in the following sizes (see 6.2):

Type I - Olive Green 507 (see 6.1)
Type II - Deleted

Schedule of sizes

Waist	Inseam
24	27, 29
26	25, 27, 29, 31
28	25, 27, 29, 31, 33
30	25, 27, 29, 31, 33, 35
32	25, 27, 29, 31, 33, 35
34	27, 29, 31, 33, 35
36	29, 31, 33, 35
38	31, 33, 35
40	31, 33
42	31, 33
44	31, 33
46	33

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: US Army Natick Research and Development Laboratories, Natick, MA 01760 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

SU S GOVERNMENT PRINTING OFFICE 1980 703 023'4329

FSC 8405

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:03Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

* 2.1 Issues of documents. The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

V-B-871	-	Button, Sewing Hole, and Button, Staple, (Plastic)
V-F-106	-	Fasteners, Slide, Interlocking
V-T-280	-	Thread, Gimp, Cotton, Buttonhole
UU-P-268	-	Paper, Kraft, Wrapping
DDD-L-20	-	Label: For Clothing, Equipage, and Tentage (General Use)
PPP-B-636	-	Boxes, Shipping, Fiberboard

MILITARY

MIL-T-43548	-	Thread, Polyester, Cotton-Covered
MIL-C-43791	-	Cloth, Twill, Polyester/Cotton (Durable Press)
MIL-C-43920	-	Cloth, Interlining, Cotton or Synthetic, and Nylon

STANDARDS

FEDERAL

FED-STD-751	-	Stitches, Seams, and Stitchings

MILITARY

MIL-STD-129	-	Marking for Shipment and Storage
MIL-STD-1188	-	Commercial Packaging of Supplies and Equipment
MIL-STD-1488	-	Provisions for Evaluating Quality of Trousers

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

* 2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

AMERICAN ASSOCIATION OF TEXTILE CHEMISTS AND COLORISTS

Technical Manual of the American Association of Textile Chemists and Colorists

(Application for copies should be addressed to the American Association of Textile Chemists and Colorists, Research Triangle Park, PO Box 12215, Durham, NC 27709.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:03Z
Check the source to verify that this is the current version before use.

TEXTILE COLOR CARD ASSOCIATION

Standard Color Card of America, 9th Edition

(Application for copies should be addressed to the Textile Color Card Association of the United States, Inc., 24 East 38th Street, New York, NY 10016.)

3. REQUIREMENTS

3.1 Guide sample. Samples, when furnished, are solely for guidance and information to the contractor (see 6.3). Variation from this specification may appear in the sample, in which case this specification shall govern.

3.2 Material (see 6.7).

* 3.2.1 Basic material. The basic material for the type I trousers shall be Olive Green 507 and shall conform to type II, class 1 of MIL-C-43791.

3.2.2 Waistband interlining. The cloth for the waistband interlining shall be 1-3/4 inches wide and shall conform to type I of MIL-C-43920.

* 3.2.3 Buttons. The buttons shall be type II, class D, style 26, 30-line conforming to V-B-871. The buttons shall have a dull finish and shall be Olive Green BP, Cable 62016 for the type I trousers.

3.2.4 Thread. The thread shall be cotton-covered polyester, ticket Nos. 50 and 70 for seaming and stitching and 30, 3 ply for sewing on buttons. The thread shall conform to MIL-T-43548.

* 3.2.4.1 Color and colorfastness. The thread shall be Olive Drab S-1, C.A. 66022 for the type I trousers and shall show colorfastness to laundering, perspiration, and light equal to or better than the standard sample. When no standard sample is available, the dyed thread shall show "good" fastness to laundering, perspiration, and light.

* 3.2.5 Gimp. The cotton gimp for reinforcing buttonholes shall be No. 8, conforming to type I or type II of V-T-280. The gimp shall be Olive Drab S-1, C.A. 66022 for the type I trousers.

3.2.6 Labels. Each pair of trousers shall have a size label and a combination identification-instruction label conforming to type I of DDD-L-20, except that the combination identification-instruction label shall be Lemon Yellow, Cable No. 70205 in conformance with the Standard Color Card of America. Fastness to laundering requirements of DDD-L-20 shall apply.

3.2.6.1 Size label. The size label shall conform to class 2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:03Z
Check the source to verify that this is the current version before use.

3.2.6.2 Combination label. The combination identification-instruction label shall conform to classes 1 and 3 combined. The body of the instruction shall be as follows:

TROUSERS, UTILITY, DURABLE PRESS
Washing Instructions

1. Machine washing. Use wash and wear cycle. Wash with warm water, 120°F using soap or mild detergent. Heavy stains may require presoaking or prespotting.

2. Hand washing. Wash in warm water, using soap or mild detergent.

DO NOT WRING OR TWIST

3. DO NOT STARCH OR USE BLEACH.

4. Dry in tumble dryer at warm setting. Remove immediately at end of drying. Shape and hang. To drip dry, remove from water before last spin cycle. Shape and hang.

5. If touch-up is required, iron at moderate or synthetic heat setting.

DO NOT REMOVE THIS LABEL

3.2.7 Slide fastener. The slider fasteners shall be brass, size M, short tab-pull, and shall conform to type I, style I of V-F-106 except that the tape shall be 9/16 ± 1/32 inch wide. Slide fasteners shall be furnished with staple bottom stops and open end top stops, and shall be of sufficient length to comply with operation 6 of table II. All components of the slide fastener shall be from the same contractor. The finished slide fastener shall not shrink more than 2 percent.

* 3.2.7.1 Slide fastener tape. The slide fastener tape shall be woven from yarns made of an intimate blend of either cotton/nylon or cotton/polyester in both the warp and filling. The color of the tape for the type I trousers shall be Olive Green 507. The tape shall show colorfastness to laundering equal to or better than the standard sample. When no standard sample is available the tape shall show "good" fastness to laundering. The tapes shall be given an approved durable press treatment, consisting of a suitable catalyzed and cured system. Hand modifiers and a wetting agent may be used to facilitate processing. Durable press resins other than those approved for use are prohibited.

3.3 End item appearance.

3.3.1 Appearance and soil release ratings. The finished cured trousers, after five washings, shall meet the ratings for the characteristics specified below when tested as specified in 4.2.2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:03Z
Check the source to verify that this is the current version before use.

Characteristic	Appearance rating
Cloth appearance	4
Crease appearance:	
Front	4
Back	4
Seam appearance (min. individual rating)	
Inseam	3
Outseam	3
Seat seam	3
Back pocket	3
Side pocket	3
Waist	3
Pocket flap	3
Fly appearance (min. individual rating)	3
Soil release (min. individual rating)	3

3.3.2 Shade. The shade of the finished cured trousers shall match the standard sample when tested as specified in 4.2.2.

3.4 Tearing strength of finished cured trousers. The finished cured trousers shall meet the physical requirements for tearing strength as specified for the type II, class 1 cloth when tested as specified in MIL-C-43791 (see 4.2.2).

3.5 Design. The trousers have two front patch pockets, two hip patch pockets with flaps closed with buttons and buttonholes, seven belt loops, hemmed bottoms, and a slide fastener front closure.

* 3.6 Figure. Figure 1 is furnished for information only. To the extent of any inconsistencies between the written specification and the figure, the written specification shall control.

3.7 Patterns. Standard patterns which provide an allowance of 1/2 inch for outseams, inseams, seat and crotch seams, side and bottom edges of hip pockets, front and bottom edges of front pockets, and 3/8 inch for all other seams will be furnished by the Government. The standard patterns shall not be altered in any way and are to be used only as a guide for cutting the contractor's working patterns. The working patterns shall be identical to the standard patterns.

3.7.1 Pattern parts. The component parts of the trousers shall be cut from the specified material in accordance with the pattern parts indicated in table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:03Z
Check the source to verify that this is the current version before use.

* TABLE I. List of pattern parts

Material	Pattern nomenclature	Cut parts
Basic material	Front	2
	Back	2
	Front patch pocket	2
	Front patch pocket facing 1/	2
	Hip pocket (type I trousers)	2
	Hip pocket flap (type I trousers)	2
	Fly (left-1, right-2)	3

1/ The front patch pocket facing may be roll cut.

NOTE: Patterns are not furnished for belt loops, waistband lining, waistband interlining, and for alternate method of making pocket flaps (see operations 1 and 9 of table II).

3.8 Construction.

3.8.1 Stitches, seams, and stitching. Stitch, seam and stitching types, as specified in table II shall conform to FED-STD-751. When two or more seam or stitch types are given for the same part of the operation, any one of them may be used. Where stitch type 401 is used, the looper shall be on the inside of the trousers. Seam allowances shall be maintained with seams sewn so that no raw edges, run-offs, twists, pleats, puckers, or open seams will result (see 6.4). All seams shall start and finish evenly. Thread tension shall be maintained so that there is no tight or loose stitching. Edge stitching and top stitching shall be uniformly gaged throughout the garment. Seams required to be worked out, that have a depth between the fold of 1/16 inch or more shall be considered a defect. The guides and knives for the overedge machines shall be set to trim only the ravelled edges of the fabric. The gage of safety stitching shall be 3/8 inch. The gage of double-lapped, double-stitched seams shall be 1/4 to 5/16 inch with the outside row 1/16 to 1/8 inch from turned edge except where otherwise specified herein.

3.8.2 Thread breaks and ends of seams. Ends of seams and stitching produced with 301 stitch type, when not caught in other seams or stitching, shall be back-tacked not less than 1/4 inch. Thread breaks (all stitch types) shall be secured by stitching back of the break not less than 1/2 inch. Skipped stitches or thread breaks (401 stitch type) may be repaired using 301 stitch type. Ends of a continuous line of stitching (except labels) shall overlap not less than 1/2 inch. The ends of the label stitching shall be overlapped not less than three stitches.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:03Z
Check the source to verify that this is the current version before use.

3.8.3 Stitches per inch. The minimum and maximum number of stitches per inch shall be as specified in table II.

3.8.4 Buttonholes. The buttonholes shall be the eyelet-end taper-bar type worked over No. 8 gimp with the ends tacked and shall have a cut length of 3/4 to 7/8 inch. The bar end of the buttonholes shall have a minimum of four tacks not counting the first cross-over stitch in that it is part of the buttonhole not the bar. The purling shall finish toward the outside of the trousers.

3.9 Manufacturing operations requirements. The trousers shall be manufactured in accordance with operation requirements specified in table II. The contractor is not required to follow the exact sequence of operations shown with the exception of operations 24 through 27, which shall be performed in the sequence listed. Any basting or holding stitching required to facilitate manufacture is permissible provided the thread does not show on the finished trousers.

3.9.1 Marking The cut parts of the trousers shall be marked to insure a uniform shade and size throughout the trousers. Any method of marking may be used except:

(1) Corrosive metal fastening devices.
(2) Sew-on type tickets.
(3) Adhesive-type tickets which discolor the material or leave traces of paper or adhesive on the material after removal of the tickets.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:03Z
Check the source to verify that this is the current version before use.

TABLE II

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
1.	Cutting. a. Cut trousers in strict accordance with patterns furnished which show directional lines, size, placement of pockets and pocket flaps, and notches for proper assembly of all parts. Unless otherwise specified, directional lines shall be placed in the warp direction. The face of the fabric shall finish on the outside of the trousers. The use of drill holes is authorized, providing they are covered by the outside fabrics; otherwise exposed drill holes shall be considered as holes in the fabric. b. Directional lines on the fronts and backs may vary from the warp direction by not more than 1-1/2 inches. Measurements shall be taken at top and bottom edges of the pattern from the directional line to the selvage edge (on the even side of the lay) of the fabric and the difference between the two measurements shall not exceed 1-1/2 inches. c. Cut all parts of the trousers from the same piece of basic material except fly parts, waistband lining, belt loops, pocket facings, and flap linings (when made of two-piece construction) which may be cut from ends. Parts cut from ends shall approximate the shade of the trousers. The waistband lining and front patch pocket facing may be pieced with no more than one joining seam and the seam spread open. d. Cut all component parts in the direction of the warp except that the right fly lining may be cut on the bias, in the warp direction, or in the filling direction and the pocket flap linings (when two-piece construction is used) may be cut in the warp or filling direction.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:03Z
Check the source to verify that this is the current version before use.

NO.	TABLE II MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
1.	Cutting. (cont'd) e. Cut the stripping for the loops of sufficient width to comply with operation 18. f. Cut the waistband lining in the direction of the warp of sufficient width and length to meet the requirements of operations 19 and 20. g. Cut the waistband interlining of sufficient length to meet the requirements of operations 19 and 20.						
2.	Replacement of defective components. During the spreading, cutting, and manufacturing process, components having material defects or damages that are classified in MIL-STD-1488 shall be removed from production and replaced with non-defective and properly matched components.						
3.	Marking. a. Mark or ticket all component parts of the trousers, except parts cut from ends, to insure correct size and uniform shade throughout the trousers. b. The use of ink pad numbering machine, rubber stamp or pencil will be acceptable provided the numbers do not show through the outside of the garment and the numbers are covered by the seam allowance.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

MIL-T-43932C

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:03Z
Check the source to verify that this is the current version before use.

TABLE II

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
4.	Make front patch pockets.						
	Finished appearance. The edges of the pockets shall finish smooth and flat. The pocket openings shall be uniform. Pockets shall be in alignment. The facings shall not be exposed beyond edge of pocket opening.						
	a. Seam facing to front edge of pocket opening.	301 or 401	SSa-1	8-10 8-10	50 50	50 70	
	b. Turn facing to the inside of pocket and fold pocket with the seam 3/16 to 1/4 inch from folded edge of pocket. Edge stitch pocket 1/16 to 1/8 inch from edge of facing.	301	BSm-3 a & b	8-10	50	50	
	c. Turn in the back raw edge of facing and single stitch 1/16 to 1/8 inch from edge through pocket.	301	BSm-3 (c)	8-10	50	50	
	- or -						
	d. Attach facing with a double needle machine in one operation using folder.	301	LSk-2	8-10	50	50	
5.	Sew on front patch pockets.						
	a. Position pockets on the outside of each front of trousers as indicated by marks on pattern, with the outside edge of pocket even with the side seam. The outside edge of pocket shall be caught in the side seam.						
	b. Turn under the front and bottom edges of pocket and double stitch, 3/16 to 1/4 inch gage, through pockets and trousers. The outer row of double stitching shall be 1/16 to 1/8 inch from edge.	301	LSd-2	8-10	50	50	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:03Z
Check the source to verify that this is the current version before use.

NO.	TABLE II MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
5.	Sew on front patch pockets. (cont'd)						
	c. Single stitch pocket to trousers above and below pocket opening 1/16 to 1/8 inch from edge. The top of pocket opening, in the finished trouser, shall terminate on bottom row of waistband stitching.	301	LSbj-1	8-10	50	50	
6.	Make flies.						
	a. Position left half of fastener on left fly so that the edge of chain will be 5/8 to 7/8 inch from front edge of finished fly at top tapering to 3/8 to 1/2 inch from front edge of finished fly at bottom (when fasteners are cut and scoops removed), and the top end of the chain 2 ± 1/4 inches from top of trousers. Stitch the tape, with the top of the tape extension turned under, through the fly with two rows of stitching; the first row 1/8 to 3/16 inch back of chain and the second row 1/16 to 1/8 inch from back edge of tape, securely tacking across top of tape extension. A 3/8 ± 1/16 inch horizontal bartack may be used for securing the top edge of slide fastener tape in lieu of the tacking.	301 or 401	SSau-2	8-10	50 50	50 70	
	b. Stitch right fly lining to right fly; turn and stitch 1/16 to 1/8 inch from edge.	301 or 401 and 301	SSe-2(a) SSe-2(b)	8-10 8-10	50 50 50	50 70 50	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:03Z
Check the source to verify that this is the current version before use.

TABLE II

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
6.	Make flies. (cont'd)						
	c. Overedge stitch back raw edges of right fly and right fly lining together with the gage of the overedge stitching 1/8 to 3/16 inch.	502 or 503 or 504	SSa-1	6-10	70 70 70	70 70 70	
	d. Position the right half of slide fastener 1/16 to 1/8 inch from the back edge of the right fly with the bottom end of chain 1/2 to 3/4 inch above the fly notch and with the edge corresponding with the left fly. Turn in top end of tape extension to one side for catching in seam of subsequent operation and single stitch 1/8 to 3/16 inch from back edge of tape through all plies the length of the tape.	301 or 401	SSa-1	8-10	50 50	50 70	
7.	Overedge stitch back edges of fly.						
	Overedge stitch the back edge of left fly.	502 or 503 or 504	EFd-1	6-10	70 70 70	70 70 70	
8.	Attach flies to front.						
	a. Join left fly to left front with notches matching. Turn and raise stitch fly 1/16 to 1/8 inch from turned edge.	301 or 401 and 301	LSq-2(a) LSq-2(b)	8-10 8-10	50 50 50	50 70 50	
	b. Overedge stitch right front from fly notch to top edge of waist.	502 or 503 or 504	EFd-1	6-10	70 70 70	70 70 70	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:03Z
Check the source to verify that this is the current version before use.

NO	TABLE II MANUFACTURING OPERATIONS REQUIREMENTS	[illegible]	SEAM OR STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
8.	Attach flies to front. (cont'd)						
	c. Join right fly to right front with notches matching.	301 or 401	[illegible]-2(a)	8-10	50 50	50 70	
	d. Turn seam allownace toward the outseam of trouser front and raise through all plies from top of trouser to base of fly, 1/16 to 1/8 inch from edge of trouser front. The stitching may be continued along crotch with the right front turned to outside (see operation 15a).	301	[illegible]-2(b)	8-10	50	50	
	e. With the fly turned to outside, stitch top end of fly to fronts; turn fly to finished position. The seam line at front edge of fly shall be set back 1/8 to 3/16 inch from finished front edge.	301 or 401	[illegible]-1	8-10	50 50	50 70	
	f. Attach slider, and with the scoops evenly matched, staple the bottom of tape. The staple shall be perpendicular to the line of scoops and shall overlap the scoops.						
9.	Make hip pocket flaps.						
	a. Fold flaps as indicated on pattern and seam side edges; turn, work out corners, and double stitch 3/16 to 1/4 inch gage along side and bottom edges.	301 [illegible] and 301	[illegible]-3(a) [illegible]-3(b) and [illegible]	8-10 8-10 8-10	50 50 50	50 70 50	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:03Z
Check the source to verify that this is the current version before use.

TABLE II

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD NEEDLE	THREAD BOBBIN / LOOPER	THREAD COVER
9.	Make hip pocket flaps. (cont'd)						
	- or -						
	b. Make flaps from two pieces with seam allowance added accordingly, as follows:						
	(1) Fold the flaps on a creasing machine with the raw edges turned in and double stitch, 3/16 to 1/4 inch gage.	301	SSc-2	8-10	50	50	
	- or -						
	(2) Seam side and bottom edges of flap, trim corners, turn, and work out corners; and double stitch 3/16 to 1/4 inch gage.	301	SSe-3	8-10	50	50	
	- or -						
	c. Top edges of one or two piece flaps may be folded in addition to all other edges on a creasing machine with the raw edges turned in, and double stitch sides and bottom edges 3/16 to 1/4 inch. The top creased edge of the underside of flap shall shall be creased 1/8 to 3/16 inch below the outer ply.	301	SSc-2 and OSf-2 (1-piece flap)	8-10	50	50	
	- or -						
	d. The side and bottom raw edges of the two piece flaps, and the side edges of the one piece flaps, shall be turned in or creased and double stitched 3/16 to 1/4 inch gage. When the flaps are made of one piece, the stitching shall be continued along the bottom folded edge.	301	SSc-2 and OSf-2 (when applicable)	8-10	50	50	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:03Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:03Z
Check the source to verify that this is the current version before use.

TABLE II

NO	MANUFACTURING OPERATION REQUIREMENTS	STITCH TYPE	SEAM AND STITCH TYPE	STITCHES PER INCH	THREAD NEEDLE	THREAD BOBBIN LOOPER	THREAD COVER
10.	Make buttonhole in flaps.						
	Make a vertical buttonhole in the center of each flap (1/4 inch off center tolerance allowed) with the inside edge of the eyelet 1/2 to 5/8 inch from bottom edge.	Buttonhol		52-56 per buttonhole including tack	40	70	
*11.	Make hip pockets and attach combination label.						
	a. Position the combination label so that on the finished trousers it will face the wearer, 1 to 1-1/2 inches below the top pocket opening marks for the right hip pocket on the inside of the trousers, centered (+ 1/2 inch tolerance) from pocket sides. Stitch on all four sides. The stitching shall not be through the printing.	301	LSbj-1	8-10	50	50	
	b. Turn in top edge of pocket 1-3/4 + 1/8 inches with raw edge turned in and simple stitch 1/16 to 1/8 inch from edge. The hem shall finish smooth and flat, without twists, pleats, or puckers.	301	LFb-1	8-10	50	50	
12.	Sew on hip pockets.						
	Turn in the edges of pockets, position to each back of trousers as indicated by marks on pattern and double stitch 3/16 to 1/4 inch gage. The outer row of double stitching shall be 1/16 to 1/8 inch from the edge. Pocket edges may be precreased prior to setting. The pocket opening shall finish not less than: 5 inches wide for sizes 24 and 26, 5-1/2 inches wide for sizes 28 through 46.	301	LSd-2	8-10	50	50	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 7[illegible] OBSOLETE UNTIL EXHAUSTED

TABLE II

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD NEEDLE	THREAD BOBBIN/ LOOPER	THREAD COVER
13.	Sew on hip pocket flaps.						
	a. Center flap with raw edges 1/2 ± 1/8 inch above top of pocket and seam 1/8 to 3/16 inch from raw edge. Turn down flap and single stitch 3/16 to 1/4 inch from turned edge.	301	LSb1 2	8-10	50	50	
	- or -						
	b. Center flap with top edge 3/4 inch above top of pocket opening with raw edge turned under and double stitch 3/16 to 1/4 inch gage, with first row of stitching 1/16 to 1/8 inch from turned edge. Top edges of flaps may be precreased prior to setting.	301	LSd-2	8-10	50	50	
14.	Join seat seam.						
	Join seat seam with a double-lapped and double-stitched seam.	401	LS 2	8-10	50	70	
15.	Join crotch seam.						
	a. When the raise stitching of right fly is not continued along crotch of right front (see operation 8d), turn crotch seam of right front to the outside and stitch 1/16 to 1/8 inch from edge.	301 or 401	EFa-1	8-10	50 50	50 70	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:03Z
Check the source to verify that this is the current version before use.

NO	TABLE II MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD NEEDLE	BOBBIN	LOOPER
15.	Join crotch seam. (cont'd)						
	b. Turn edge of left front crotch seam to inside and double stitch, catching the right front crotch seam with both rows of stitching through right fly lining. The double stitching shall be 3/16 to 1/4 inch gage with the outer row of stitching, 1/16 to 1/8 inch from folded edge. The top end of stitching shall terminate at the stitching along the back edge of left fly.	301 401	[illegible]	8-10	50 50	50 70	
16.	Join side seams.						
	Join side seams with a safety stitch catching the back edge of front pockets in the seaming.	515 or 516 or 519	SSa-2	8-10	50 70 (over edge stitching)	70 70	(chain stitch)
17.	Join inseams.						
	Join inseams in one continuous operation with a double-lapped and double-stitched seam. The seat and crotch seams shall not be staggered more than 5/8 inch (measurements taken from the center of seams). The fronts shall lap the backs.	301 or 401	[illegible]	8-10	50 50	50 70	
18.	Make seven belt loops.						
	Finished appearance. The seven belt loops shall measure 3/8 to 1/2 inch wide and shall be located as follows: One centered on each front, one adjacent to each side seam on the back part; one adjacent to seat seam; and one on each back, midway between seat seam and side seam.						

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:03Z
Check the source to verify that this is the current version before use.

NO	TABLE II MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
18	Make seven belt loops. (cont'd)						
	a. Fold stripping (see operation 1.e) with edges abutted at center and double stitch not less than 3/16 inch gage, using a cover stitch on the underside.	406	1Fh-1	6-10	70	50	
	or						
	b. Fold stripping (see operation 1.e) lengthwise, turn under both raw edges, and single stitch each edge 1/16 to 1/8 inch from fold.	301	1Ip-1	8-10	50	50	
	or						
	c. Fold stripping (see operation 1.e) with both edges turned in and the turned in edges abutted and stitch with the covering stitch on the underside.	105	LFae-1	12-16	50		
19	Attach waistband lining and label.						
	Finished appearance. The waistband lining shall be seam on flat and smooth without fullness, gathers, or pleats. The lining shall not be exposed beyond the top of waistband. The waistband lining shall finish 1-3/4 to 1-7/8 inches wide. The seam allowance of the side seams shall be turned toward the back.						

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:03Z
Check the source to verify that this is the current version before use.

NO	TABLE II MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN (LOOPER)	OTHER
19.	Attach waistband lining and label. (cont'd)						
	a. Fold the edges of the waistband lining over the interlining and double stitch, 1-3/8 to 1-1/2 inch gage, to the trouser with the top raw edge of the trouser turned in and the top end of the belt loops inserted in the waistband seam. The belt loops may be separately attached. Position the size label on the inside of the left back adjacent to the seat seam. The top edge shall be caught in the lower waistband stitching.	301 or 401	LSc-2	8-10	50 70	50 70	
	- or -						
	b. Attach the waistband lining by single needle seaming the top of the band to the trousers with the top end of the belt loops inserted in the seam. The belt loops may be separately attached. Turn lining and insert the interlining between the seam allowances and the trouser. Edge stitch 1/8 inch from top edge.	301 or 401	SSc-2	8-10	50 50	50 70	
	c. Turn bottom raw edge of lining over interlining and stitch to trouser through all plies. The rows of stitching shall be 1-3/8 to 1-1/2 inch gage. The bottom row of stitching shall extend 1/4 inch minimum beyond the back edge of the left fly stitching. The top edge of the size label shall be caught in the stitching and positioned as in operation 19a.	301 or 401	LSd-1	8-10	50 50	50 70	
20.	Finish end of right fly and top of left fly.						
	a. Turn in the ends of the waistband lining and stitch to front edge of right fly.	301	SSb-1	8-10	50	50	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:03Z
Check the source to verify that this is the current version before use.

TABLE II

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
20.	**Finish end of right fly and top of left fly.** (cont'd)						
	b. Insert end of waistband lining under the left fly and stitch back edge of fly from top of waistband to fly notch. The stitching shall be 1-5/8 to 1-7/8 inches from front edge of fly, curving to the fly notch.	301	SSa-1	8-10	50	50	
21.	**Finish bottoms.**						
	Hem bottom of trousers, as indicated by marks on pattern, with the raw edges turned in and single stitch 1/16 to 1/8 inch from edge. The hem shall finish 1 ± 1/4 inches wide.	301	LSb-1	8-10	50	50	
22.	**Make waistband buttonhole.**						
	Make a horizontal buttonhole in the top of left fly in the center of waistband (1/4 inch off center tolerance) with the inside edge of eyelet 1/2 to 5/8 inch from edge of left fly.	Buttonhole		52-56 buttonhole including tack	50	70	
23.	**Bartacking.**						
	Finished appearance. Unless otherwise specified, the bartacks shall be horizontal and shall be 3/8 to 1/2 inch long and positioned as specified.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 [illegible] UNTIL EXHAUSTED

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:03Z
Check the source to verify that this is the current version before use.

NO.	TABLE II MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
23.	Bartacking. (cont'd)						
*	a. When belt loops are inserted in the waistband lining joining seam, the loops shall be bartacked at top and bottom with the bottom raw ends turned under. When belt loops are not inserted in waistband lining, turn under top and bottom raw ends of loop and bartack to waist. The top edges of the loops shall be even (± 1/8 inch tolerance) with top edge of waistband. Bartacks shall not be more than 1/4 inch from the top and bottom folded ends of loops and the distance between bartacks shall be 1-5/8 ± 1/8 inch. The turnunder of the belt loops shall be 3/8 to 1/2 inch.	Bartack		26 per bartack	50	50	
	b. Bartack top and bottom ends of side patch pocket opening to the trousers, with bartacks positioned at right angles to pocket opening. The lower bartack shall extend into the outseam of the trousers. The top bartack shall be not more than 1/2 inch below bottom row of waistband stitching. The pocket opening shall finish not less than 5-3/4 inches for sizes 26 to 32 inclusive and not less than 6 inches for all other sizes.	Bartack		28 per bartack	50	50	
	c. Bartack the top corners of hip pocket openings with a 3/8 ± 1/16 inch bartack 1/16 to 1/8 inch from top of pockets with bartack centered on the double stitching. The bartack shall not extend beyond pocket edge.	Bartack		28 per bartack	50	50	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:03Z
Check the source to verify that this is the current version before use.

TABLE II
MANUFACTURING OPERATIONS REQUIREMENTS

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
23.	Bartacking. (cont'd)						
	d. Bartack bottom of left fly at top of crotch seam with bartack through right fly. Bartack to be set diagonally in line with the left fly stitching at the junction of the crotch seam and stitching on left fly.	Bartack		28 per bartack	50	50	
24.	Cleaning.						
	a. Trim all ends of outside stitching and remove loose threads from the trousers. Trim ends of belt loops; remove all spots and stains, and all shade or size markings.						
	b. Before folding and packaging, trousers must be free of residual fiber particles, lint and dust, or other foreign material.						
25.	Pressing.						
	Finished appearance. The pressing conditions with regards to time, temperature, steaming, and head pressure shall be adequate to obtain required results. Press the tops, including the fly, and pockets. The legs shall be pressed individually. Crease the legs in the center with the seams matching at the bottom and at the knee. There shall be no variation in the sharpness of the leg creases at front and back parts of legs. The end of the creases shall not extend into the bottom of the front pockets, nor shall they be more than 1 inch below the bottom of the pockets.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:03Z
Check the source to verify that this is the current version before use.

NO	TABLE II MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN LOOPER	COVER
26.	Curing. The pressed trousers shall be suspended from the bottoms or waist and subjected to dry oven heat. The temperature and time of curing conditions shall be adequate to obtain required results. After curing, the trousers shall be left on the hangers until they have cooled to room temperature.						
27.	Attach buttons.						
	a. Sew a button on right fly at waist to correspond with eyelet end of buttonhole in left fly at waist.	101 or 301		14-16 per button	30-2		
				14-16 per button	30-2	30-2	
	b. Sew a button to each hip pocket through hem to correspond to eyelet end of buttonhole in flaps.	101 or 301		14-16 per button	30-2		
				14-16 per button	30-2 30-2	30-2	
	NOTE: Operation 27 may be performed prior to curing (operation 26) provided the impression of buttons does not show on the finished (cured) trousers.						

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:03Z
Check the source to verify that this is the current version before use.

* 3.10 Finished measurements. The finished measurements shall be as shown in table III.

TABLE III. Finished measurements in inches

Size	1/2 Waist 1/	Inseam 2/					
24	12		27	29			
26	13	25	27	29	31		
28	14	25	27	29	31	33	
30	15	25	27	29	31	33	35
32	16	25	27	29	31	33	35
34	17		27	29	31	33	35
36	18			29	31	33	35
38	19				31	33	35
40	20				31	33	
42	21				31	33	
44	22				31	33	
46	23					33	
Tolerance	± 1/2	± 1	± 1	± 1	± 1	± 1	± 1

1/ With the waistband buttoned, measure along center of waistband from side edge to side edge.

2/ Measure from crotch seam along the inseam to the hemmed bottom edge.

3.11 Workmanship. The finished trousers shall conform to the quality of product established by this specification. The occurrence of defects shall not exceed the applicable point values or defect limits.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

* 4.2 Quality conformance inspection. Sampling and examination of the end item shall be performed in accordance with MIL-STD-1488 except that the trousers shall be inspected in accordance with the "SD" semi-dress classification (except that defect XII a2 shall be a 2 point defect) and the sampling provisions shall be in accordance with table IV below in lieu of the "SD" sampling provisions table in MIL-STD-1488. As a final step in the contractor's production control plan before formation of a lot, after pressing, and prior to folding for packaging, each of the trousers shall be examined for the following selected defects:

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:03Z
Check the source to verify that this is the current version before use.

Hole, cut, tear, smash, burn, drill hole, scorched area, multiple float, or open place on outside more than 1/4 inch.
Variation in shade within an outside part or between outside parts.
Pressing omitted or double crease line.
Pocket or flap out of alignment by more than 1/2 inch.
Tops of fly uneven by more than 1/2 inch.
Slide fastener does not function properly.

Trousers containing any of the above selected defects shall not be included in the end item lot. Selected defects found during end item sampling inspection shall be cause for rejection of the lot when the "Maximum acceptance number for selected defects" specified in table IV is exceeded.

TABLE IV. Sampling provisions for trousers

	Lot size	Sample size	Maximum acceptance number for selected defects	Maximum acceptable point values	
				3&2 point defects	3,2&1 point defects
Normal inspection	Up thru 500	50	0	11 points	21 points
	501 thru 1200	80	0	13 points	30 points
	1201 thru 3200	125	1	21 points	39 points
	3201 thru 10,000	200	1	29 points	57 points
	10,001 thru 35,000	315	2	40 points	85 points
	35,001 and over	500	3	61 points	127 points
	Lot size	Sample size	Maximum acceptance number for selected defects	Maximum acceptable point values	
				3&2 point defects	3,2&1 point defects
Tightened inspection	Up thru 500	50	0	5 points	15 points
	501 thru 1200	80	0	7 points	22 points
	1201 thru 3200	125	1	12 points	34 points
	3201 thru 10,000	200	1	18 points	51 points
	10,001 thru 35,000	315	2	28 points	78 points
	35,001 and over	500	3	41 points	117 points
	Lot size	Sample size	Maximum acceptance number for selected defects	Maximum acceptable point values	
				3&2 point 1/ defects	3,2&1 point defects
Reduced inspection	Up thru 1200	32	0	5-12 points	22 points
	1201 thru 3200	50	0	7-14 points	27 points
	3201 thru 10,000	80	0	11-18 points	36 points
	10,001 thru 35,000	125	1	16-23 points	49 points
	35,001 and over	200	1	23-30 points	66 points

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:03Z
Check the source to verify that this is the current version before use.

1/ If the first value is exceeded but the second value has not been exceeded, accept the lot but reinstate normal inspection. The second value is the maximum acceptable point value.

4.2.1 Component and material inspection. In accordance with 4.1, components and materials shall be inspected in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document.

4.2.2 End item testing. The finished cured trousers shall be tested as specified in table V. All test reports shall contain the individual values utilized in expressing the final results. The lot size shall be expressed in units of one pair of trousers. The sample unit shall be two finished pair of trousers. One pair of unlaundered trousers shall be used for determining shade and tearing strength and the remaining one pair of trousers shall be laundered and used to perform the remaining tests. The sample size shall be as specified below.

Lot size	Sample size
800 or less	5
801 to 22,000 inclusive	8
22,001 and over	13

The lot shall be unacceptable if the sample fails to meet any of the following conditions:

a. For cloth appearance and crease appearance: Two-thirds or more of the individual ratings for each characteristic shall be 4 or above and no single rating shall fall below 3. 1/ The lot rating for each characteristic shall be determined from the total ratings assigned for that characteristic in each inspection lot, i.e., in a sample size of eight trousers, the appearance rating for each characteristic indicated above shall be based upon the total of 24 values assigned for that characteristic (three judgements for each of the eight trousers).

b. For seam appearance, fly appearance and soil release: No single rating shall fall below 3.

c. For shade and tearing strength: No individual trouser shall fail to meet the specified requirement.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:03Z
Check the source to verify that this is the current version before use.

TABLE V. End item testing

Characteristic	Requirement paragraph	Test method
Cloth appearance rating	3.3.1	4.3.1
Crease appearance rating	3.3.1	4.3.1
Seam appearance rating	3.3.1	4.3.1
Fly appearance rating	3.3.1	4.3.1
Soil release rating	3.3.1	4.3.1
Shade	3.3.2	1/
Tearing strength	3.4	2/

1/ The shade of the finished cured trousers shall match the standard sample under artificial daylight having a color temperature of 7500 kelvin and shall be a good approximation of the standard sample under incandescent lamplight at 2800 kelvin.

2/ Test in accordance with the cured fabric requirements of MIL-C-43791. This test shall be performed after curing but prior to laundering.

4.3 Methods of inspection.

4.3.1 Tests for appearance and soil release.

4.3.1.1 Apparatus and material used for laundering. The following apparatus and material are required for laundering:

a. Automatic washing machine (see 6.3).
b. Automatic dryer (see 6.3).
c. AATCC Standard Detergent 124 or equivalent.
d. Dummy pieces for ballast - 3 feet by 3 feet hemmed pieces of the basic material to be added to test trousers to make a 4-pound load.
e. Mineral oil: Nujol, Plough Inc., Memphis, Tennessee or equivalent.
f. AATCC standard blotting paper or equivalent.
g. Five-pound weight, 2-1/2 inches in diameter.
h. Polyethylene film, 3 inches by 3 inches.
i. Eye dropper.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:03Z
Check the source to verify that this is the current version before use.

4.3.1.2 Apparatus and material used for evaluation. The following apparatus and material are required for evaluation of samples:

a. Apparatus for overhead and side lighting procedure as specified in AATCC Test Methods 124-1978 and 88C-1975.
b. AATCC three dimensional Durable Press Replicas.
c. AATCC photographic standards for evaluating single and double needle stitching and for evaluating pressed in creases.
d. Deering Milliken photographic standards for evaluating stain release.
e. Non-reflecting black-topped table 35 ± 1 inches high and at least 30 inches by 24 inches, with the long dimension parallel and adjacent to the viewing board.
f. NARADCOM photographic standards for evaluating trouser flys (see 6.3).

4.3.1.3 Procedure.

4.3.1.3.1 Laundering. If the trousers weigh less than 4 pounds, ballast to make up a standard 4 pound load shall be added to the test trousers. The ballast shall consist of durable press trousers or pieces of the basic fabric. The washer shall be set for high water level, warm water temperature, and a 12-minute wash on the wash and wear cycle. The water used shall have a hardness not greater than 50 parts per million (ppm). The wash temperature shall be 115 ± 5°F and the rinse temperature shall be 80 ± 5°F. When the washer has filled, add 140 g of detergent. Allow the washer to proceed automatically through the final spin cycle. Remove the trousers immediately at the completion of the final spin and separate the trousers, and ballast pieces when required, if tangled. Place the complete washed load in the dryer and dry at the normal cycle and at a setting which generates an exhaust temperature range of 140 to 160°F. Operate the dryer until the load is dry and continue tumbling 5 minutes with the heat turned off (cool-down cycle). Remove the load immediately after the machine stops. Repeat the wash and dry cycle until the load has completed four cycles. At the completion of the fourth cycle, the trousers shall be stained with mineral oil in three different spots on the inside of one leg of the trousers. Place the area to be stained on AATCC standard blotting paper. Using an eye dropper, drop five drops of mineral oil for each spot. Place a 3 by 3 inch piece of polyethylene film over the oil. Place a 5-pound weight (2-1/2 inches diameter) on the film directly over the oil. Keep the weight in place for 60 seconds. Remove the weight and polyethylene film and wipe off the excess oil with a clean tissue. Allow the specimen to hang undisturbed for at least 15 minutes but not longer than 2 hours. The stained trousers, and the dummy pieces when required, shall then be returned to the washing machine and washed for the fifth (last) complete washing and drying cycle. The trousers shall be buttoned and the legs shall be folded along the crease and suspended by the leg bottoms in a pants holder or similar device with legs kept separate from each other. The trousers shall also be held in this manner during conditioning and during interruption of wash and dry cycle.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:03Z
Check the source to verify that this is the current version before use.

4.3.1.3.2 Evaluation. Three trained observers shall evaluate and rate each sample unit for appearance criteria independently of each other. The trousers shall be zipped and placed on a clothes hanger, similar to that used to hang women's skirts, by spring clips at the waistband. The trousers shall hang with the waistband extended so that the front lays against the back and the crease falls in the center of the leg as it faces the observer. The trousers shall be suspended on the viewing board in such a manner that the trousers lay flat on the surface and the point midway between the top of the waistband and the lower hem of the leg is 5 feet from the floor. With the cloth, seam, fly or crease appearance standards as applicable, placed on the viewing board, the observer shall compare the trousers to each standard and shall rate the trousers according to the appearance on the cloth, seam, fly or crease standard that most nearly matches the appearance of the trousers. No estimation of ratings falling between standards is allowed and the full numerical rating of the nearest standard must be assigned. Evaluation shall be conducted in a room where the only source of light will be that used for observation. To prevent unwanted reflection of light that will interfere with the observation, the walls may be painted a non-reflecting black, or blackout curtains may be used on each side of the viewing area.

4.3.1.3.2.1 Evaluation of cloth appearance. Overhead lighting procedure and cloth appearance standards shall be used (4.3.1.2). To facilitate comparative testing, the three dimensional plastic replicas that most nearly match the cloth appearance of the trousers shall be mounted on the board on each side of the trousers. The cloth appearance of the trousers shall be observed and compared with the standards. The overall cloth appearance of the trousers i.e., front and back combined, shall be rated and assigned the numerical value of the appearance replica that most nearly matches it. The rating values assigned by each of the three observers for cloth appearance shall be reported for each sample unit.

4.3.1.3.2.2 Evaluation of seam appearance. Overhead lighting procedure and single and double needle stitching standards shall be used (4.3.1.2). To facilitate comparative testing, the seam standards shall be mounted on the viewing board to the left of the trouser as viewed. Seams specified in 3.3.1 shall be observed and compared with the standards. The appearance of each seam shall be assigned the numerical value of the standard that most nearly matches. The rating values assigned by each of the three observers for each sample unit shall be reported.

4.3.1.3.2.3 Evaluation of soil release. Overhead lighting procedure and the soil release standard shall be used (4.3.1.2). To facilitate comparative testing, the soil release standard shall be mounted and centered on the viewing board 45 inches from the floor (center). The trousers, with the stained area visible, shall be placed upon the black topped table and in front of the standard. The trouser stains shall be compared with the standard and shall be assigned the numerical value of the standard that they most nearly match. One rating shall be assigned for all three stains by each observer. The rating value assigned by each of the three observers for each sample unit shall be reported.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:03Z
Check the source to verify that this is the current version before use.

4.3.1.3.2.4 Evaluation of crease appearance. Overhead and side lighting procedures and the crease appearance standard shall be used (4.3.1.2). The required side lighting shall be added to the overhead lighting and the trousers evaluated for crease appearance. To facilitate comparative testing, the crease appearance standard shall be mounted on the viewing board to the left center of the trousers as viewed. The trousers shall be adjusted as necessary in order that each crease area being evaluated, i.e., front or back, lies in a relaxed position perpendicular to the side lighting in order to allow proper comparison to the standard. Each crease area specified in 3.3.1 shall be compared with the standard and assigned the numerical value of the standard that most nearly matches it. Each crease area specified shall be rated on an overall appearance basis and assigned a value accordingly, i.e., creases on the back shall be rated in accordance with the overall appearance of both creases as a unit and not on an individual crease basis. Individual ratings assigned by each of the three observers of each crease area specified in 3.3.1 shall be reported for each sample unit.

4.3.1.3.2.5 Evaluation of fly appearance. Overhead lighting procedures and the NARADCOM fly appearance standards shall be used (see 4.3.1.2). To facilitate comparative testing, the fly standard shall be mounted on the viewing board to the left of the trouser as viewed by the observer. The fly appearance shall be observed and compared with the standard. The appearance of each fly shall be assigned the numerical value of the standard that most nearly matches it. The rating values assigned by each of the three observers for each sample unit shall be reported.

5. PACKAGING

5.1 Preservation. Preservation shall be level A or Commercial as specified (see 6.2).

* 5.1.1 Level A. Each pair of trousers, with inseams meeting, shall be folded from the leg bottom up toward the waistband to an overall length of approximately 23 inches. For the larger sizes it may be necessary to adjust the seat area to achieve the desired width of approximately 14-1/2 inches. Ten pairs of folded trousers of one size only shall be neatly stacked in a bundle with the waistbands alternated and securely tied 4 inches in from each end with cotton tape or twine.

5.1.2 Commercial. The trousers shall be preserved in accordance with MIL-STD-1188.

5.2 Packing. Packing shall be level A, B, or Commercial as specified (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:03Z
Check the source to verify that this is the current version before use.

* 5.2.1 Level A packing. Forty pairs of trousers of one size only, preserved as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC-L, grade V2s of PPP-B-636. The inside of each shipping container shall be fitted with a box liner conforming to type CF, class weather-resistant, variety DT, grade V15c of PPP-B-636. Level A intermediate packs shall be packed flat, four in depth within a shipping container. Inside dimensions of each shipping container shall approximate 23-1/2 inches in length, 15 inches in width, and 15 inches in depth. Approximate dimensions are furnished as a guide only. Each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to type I, grade B of UU-P-268. Each shipping container shall be closed in accordance with method III, waterproofed in accordance with method V, and reinforced as specified in the appendix of PPP-B-636, except that the inspection shall be in accordance with 4.2. Toward the end of the contract or when there are less than the required amount per container of the same size, mixed sizes may be packed within the same container.

* 5.2.2 Level B packing. Forty pairs of trousers of one size only, preserved as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC-L, type CF (variety ST) or ST, class domestic, grade 275 of PPP-B-636. The inside of each shipping container shall be fitted with a box liner conforming to type CF, class domestic, variety DT, grade 275 of PPP-B-636. Level A intermediate packs shall be packed flat, four in depth within a shipping container. Inside dimensions of each shipping container shall approximate 23-1/2 inches in length, 15 inches in width, and 15 inches in depth. Approximate dimensions are furnished as a guide only. Each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to type I, grade B of UU-P-268. Each shipping container shall be closed in accordance with method II as specified in the appendix of PPP-B-636, except that the inspection shall be in accordance with 4.2. Toward the end of the contract or when there are less than the required amount per container of the same size, mixed sizes may be packed within the same container.

5.2.2.1 Weather-resistant fiberboard container. When specified (see 6.2), the shipping container shall be a grade V3c, V3s, or V4s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with method III as specified in the appendix of PPP-B-636, except that the inspection shall be in accordance with 4.2.

5.2.3 Commercial. Trousers, preserved as specified in 5.1, shall be packed in accordance with MIL-STD-1188.

5.3 Marking. In addition to any special marking required by the contract, intermediate packs (bundles) and shipping containers shall be marked in accordance with MIL-STD-129 or MIL-STD-1188, as applicable.

5.3.1 Labels, mixes sizes. Each shipping container, packed with mixed sizes, shall have securely attached to the end and side, directly under the printing or stenciling, a white paper label 5 by 4 inches with the words "MIXED SIZES" plainly stamped or printed thereon, and under these words shall be legibly stamped or printed the correct quantity and sizes contained therein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:03Z
Check the source to verify that this is the current version before use.

6. NOTES

6.1 Intended use. The type I trousers are intended for use by male and female military personnel of the Department of Defense as the standard component for use with the Olive Green 507 durable press utility shirt.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) Type and sizes required (see 1.2).
(c) Selection of the applicable levels of preservation and packing (see 5.1 and 5.2).
(d) When weather resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).

6.3 Samples and photographic standards. For access to samples of the trousers, shade samples, or the NARADCOM photographic standards, address the procuring activity issuing the invitation for bids.

6.4 Seams. In order to avoid puckering and to produce the flattest seams possible, consideration must be given to the following: The needle should be the smallest size possible with a slim point. The smallest throat plate hole possible should be used to prevent flagging. Presser foot pressure should be just enough to insure a steady flow of material. Feed dogs should contain 18 to 20 teeth per inch for normal sewing and 20 to 25 teeth per inch for stitching down. All attachments should be as smooth as possible to permit free flowing of the fabric through the machine. The lightest possible thread tension should be used while maintaining a good stitch. The upper and lower threads must be balanced. Frequent checks should be made to insure that blunt needles are eliminated and machine adjustments maintained. Experience has shown that the puckering, when sewing with stitch 401, can be reduced considerably, if not eliminated, by the use of needle feed machines, setting the feed one stitch higher than the desired number and the foot one stitch lower.

6.5 Recommended apparatus. The recommended apparatus for 4.3.1.1 a and b are:

a. Kenmore Automatic Washing Machine Model 600, or similar washing machine. In case of dispute, the Kenmore Model in use at the procurement activity shall be used.
b. Kenmore Automatic Dryer Model 600 or equivalent.

6.6 Resins. Only those durable press resins already approved and so listed in the invitation for bids or request for proposal shall be considered acceptable for the related procurement.

6.7 Recycled material. It is encouraged that recycled material be used when practical as long as it meets the requirements of the specification (see 3.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:03Z
Check the source to verify that this is the current version before use.

6.3 Changes from previous issue. The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:

Army - GL
Navy - NU
Air Force - 11

Preparing activity:

Army - GL

Project No. 8405-0855

Review activities:

Army - MD
Air Force - 99
DLA - CT

User activities:

Navy - YD
Air Force - 45

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:03Z
Check the source to verify that this is the current version before use.

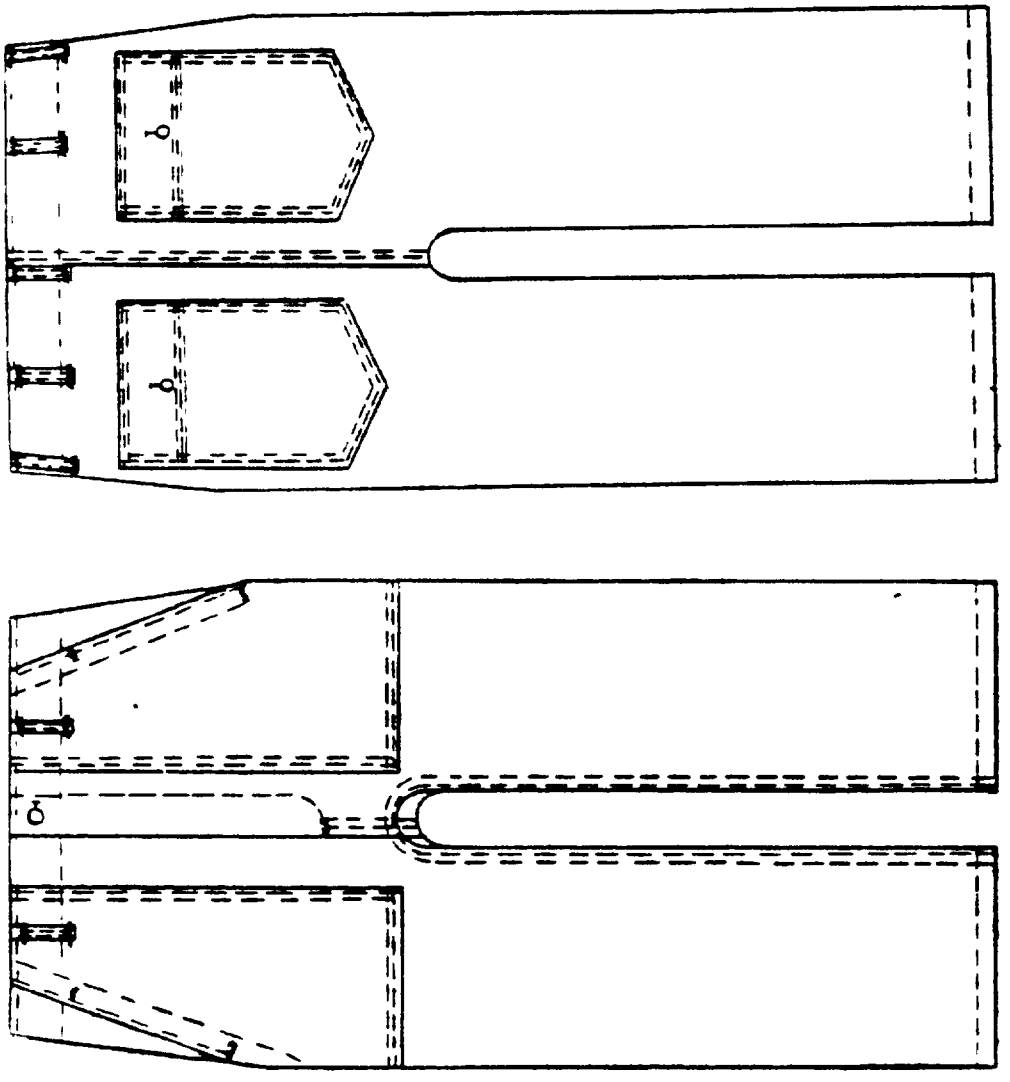


FIGURE 1 TROUSERS, UTILITY (DURABLE PRESS) 2-1-1126
TYPE I

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:03Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS. In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO 12062 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

COMMANDER
US ARMY NATICK RESEARCH AND DEVELOPMENT COMMAND
ATTN: DRXNM-EPS
NATICK, MA 01760

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:03Z
Check the source to verify that this is the current version before use.

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1 DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4 TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)* _____

5 PROBLEM AREAS

a. Paragraph Number and Wording

b. Recommended Wording

c. Reason/Rationale for Recommendation

6 REMARKS

7a NAME OF SUBMITTER *(Last, First, MI)* – Optional	b WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8 DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426

PREVIOUS EDITION IS OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:03Z
Check the source to verify that this is the current version before use.