MIL-T-43955B
31 December 1985
SUPERSEDING
MIL-T-43955A
4 May 1978

MILITARY SPECIFICATION

TRUNKS, GENERAL PURPOSE: EXERCISER

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This document covers the requirements for general purpose trunks made of cotton material.

1.2 Classification. The trunks shall be one type in the following sizes as specified (see 6.2).

Schedule of sizes

X-Small (24-26)	Large (36-38)
Small (28-30)	X-Large (40-42)
Medium (32-34)	XX-Large (44)

2. APPLICABLE DOCUMENTS

2.1 Government documents. Unless otherwise specified, the following documents of the issue in effect on date of invitation for bids or request for proposal form a part of this document to the extent specified herein.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to U.S. Army Natick Research and Development Center, Natick, MA 01760-5014, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A

FSC 8415

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:10Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

FEDERAL

V-T-276	- Thread, Cotton
JJ-W-155	- Webbing, Textile, (Cotton, Elastic)
DDD-L-20	- Label: For Clothing, Equipage, and Tentage, (General Use)
PPP-B-636	- Boxes, Shipping, Fiberboard

STANDARDS

FEDERAL

FED-STD-191	- Textile Test Methods
FED-STD-751	- Stitches, Seams, and Stitchings

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	- Marking for Shipment and Storage
MIL-STD-147	- Palletized Unit Loads

(Copies of documents required by manufacturers in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

* 2.2 Other publications. Unless otherwise specified, the following documents of the issue in effect on date of invitation for bids or request for proposal form a part of this document to the extent specified herein.

AMERICAN ASSOCIATION OF TEXTILE CHEMISTS AND COLORISTS (AATCC)

Chromatic Transference Scale

(Application for copies should be addressed to the American Association of Textile Chemists and Colorists, P.O. Box 12215, Research Triangle Park, North Carolina 27709.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:10Z
Check the source to verify that this is the current version before use.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

D 3951 - Standard Practice for Commercial Packaging

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

(Technical society and technical association documents are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

* 2.3 Order of precedence. In the event of conflict between the text of this document and the references cited herein, the text of this document shall take precedence.

3. REQUIREMENTS

3.1 Guide sample. Samples, when furnished, are solely for guidance and information to the contractor (see 6.3). Variation from this document may appear in the sample, in which case this document shall govern.

3.2 Material.

* 3.2.1 Basic material. The basic material shall be cotton or a blend of polyester and cotton. When a polyester and cotton blend is used, the cloth may contain up to 70 percent polyester with the remaining percentage being cotton. The cloth shall conform to the following requirements when tested as specified in 4.2.1:

Weave, left hand twill	3 up, 1 down (or as an alternate 2 up, 1 down)
Weight per square yard, ounces (minimum)	5.8
Yarns per inch (minimum)	
Warp	84
Filling	40
Breaking strength, pounds (minimum)	
Warp	100
Filling	45
Shrinkage percent (maximum)	
Warp	2.0
Filling	2.0

Source: https://assist.dla.mil -- Downloaded: 202640-21T23:10Z
Check the source to verify that this is the currentversion before use.

* 3.2.1.1 Color. The color of the material shall be gold shade 422. The dyed and finished cloth shall be free of labile sulfur as defined in the test method when tested as specified in 4.2.1. The color of the finished trunks shall be gold shade 422 and shall show fastness to perspiration, laundering and crocking equal to or better than the standard sample.

3.2.1.2 pH. The pH value of the water extract of the finished cloth shall be not less than 5.5 nor more than 8.5 when tested as specified in 4.2.1.

3.2.1.3 Finish. The starch and protein content, including chloroform soluble material, of the finished carded cotton cloth shall not exceed 3.0 percent when tested as specified in 4.2.1.

* 3.2.2 Binding and ornamentation. The cloth for binding the leg openings and for ornamentation along the outseams shall be cotton or a blend of polyester and cotton. When a polyester and cotton blend is used, the cloth may contain up to 70 percent polyester with the remaining percentage being cotton. The cloth shall conform to the following requirements when tested as specified in 4.2.1:

Weave	Plain
Weight per square yard, ounces (minimum)	2.8
Yarns per inch (minimum)	
Warp	80
Filling	76
Breaking strength, pounds (minimum)	
Warp	40
Filling	30
Shrinkage, percent (maximum)	
Warp	2.0
Filling	2.0

* 3.2.2.1 Color. The color of the material shall be black shade 421.

3.2.2.2 Colorfastness. The dyed material shall show fastness to perspiration, laundering and crocking equal to or better than the standard sample. When no standard sample is available, the dyed cloth shall show "good" fastness to perspiration and "good" fastness to laundering as specified in FED-STD-191, and shall show an AATCC Chromatic Transference Scale rating for crocking not less than 3.5 when tested as specified in 4.2.1.

3.2.3 Elastic webbing. The elastic webbing shall be 1 1/4 inches wide conforming to type I, class 9 or JJ-W-155, except that the elongation at low temperatures shall not apply.

Source: https://assist.dla.mil -- Downloaded: 202640-21T23:10Z
Check the source to verify that this is the currentversion before use.

3.2.4 Thread. The cotton thread for seaming and stitching shall be type IA2 and IA3, ticket No. 60, 3 ply conforming to V-T-276.

* 3.2.4.1 Color. The color of the thread for seaming and stitching shall match the basic fabric, except that the color of the thread for stitching and binding shall be black shade 421. The dyed thread shall show good colorfastness to perspiration and laundering.

3.2.5 Label. Each pair of trunks shall have a combination size, identification, and instruction label conforming to type VI, class 14 of DDD-L-20. The label shall show fastness to accelerated laundering. The body of the instructions shall be as follows:

Hand or machine wash in cold or warm water.
Tumble dry at cotton setting.
Wash and dry each garment separately.
DO NOT BLEACH.
DO NOT REMOVE THIS LABEL.

3.3 Design. The trunks are thigh length, boxer style with elastic waist, bound leg opening and ornamentation along the outseams (see figure 1).

3.3.1 Figure. Figure 1 is furnished for information purposes only. If there are any inconsistencies between this document and the figure, this document shall control.

3.4 Patterns. The pattern parts for the front and back shall be furnished and graded by the contractor with finished measurements of table II being maintained. The seam allowance for double-lapped and double-stitched seams shall be 1/2 inch.

3.5 Construction.

3.5.1 Stitches, seams and stitching. Stitch, seam, and stitching types specified in table I shall conform to FED-STD-751. Whenever two or more methods of seams or stitches are given for the same part of the operation, any one of them may be used. Where stitch type 401 is used, the looper (under thread) shall be on the inside of the pants. The gage of stitching for double-stitched seams shall be 3/16 to 1/4 inch.

3.5.2 Stitches per inch. The minimum and maximum number of stitches per inch shall be as specified in table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:10Z
Check the source to verify that this is the current version before use.

3.5.3 Thread breaks and ends of seams. Ends of all seams and stitchings produced with 301 stitch type, when not caught in other seams or stitching, shall be backtacked not less than 1/4 inch. Ends of a continuous line of stitching shall overlap not less than 1/2 inch, except for labels which shall have a minimum 3 stitch overlap. Thread breaks (all stitch types) shall be secured by stitching back of the break not less than 1/2 inch. Skipped stitches or thread breaks on 401 stitch type may be repaired using 301 stitch type. Seams shall be sewn so that no raw edges, runoffs, twists, pleats, puckers or open seams will result. Thread tension shall be maintained so that there is no tight or loose stitching.

3.6 Manufacturing operations requirements. The trunks shall be manufactured in accordance with operations requirements specified in table I. The contractor is not required to follow the exact sequence of operations. Any additional basting or holding stitching, other than those specified, used to facilitate manufacture is permissible provided the threads are removed or do not show in the finished trunks.

3.6.1 Marking. The component parts of the trunks shall be marked or bundled to ensure a uniform shade and size throughout the trunks. Any method of marking may be used except:

a. Corrosive metal fastening devices.

b. Sew-on type tickets.

c. Adhesive type tickets that discolor the material or leave traces of paper or adhesive on the material after removal of the tickets.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:10Z
Check the source to verify that this is the current version before use.

TABLE I. Manufacturing Operations Requirements

No.	Manufacturing Operations Requirements	Stitch type	Seam and stitching type	Stitches per inch	Thread	
					Needle	Bobbin or Looper
1.	Cutting.					
	a. The fronts and backs shall be cut in the warp direction.					
	b. Cut all component parts of the trunks from the same piece of cloth.					
	c. Cut the elastic (relaxed position) to finish at lengths indicated for each respective size (see 3.7) and according to operations 6 and 7.					
	d. Cut the material for the binding and ornamentation on the bias and of sufficient width to comply with operations 4 and 8. There may be one piecing of the binding or ornamentation visible on each of the finished trunks.					
2.	Replacement of damaged parts.					
	Care shall be exercised during the spreading, cutting, and manufacturing operations to ensure that material defects and damages as classified in 4.2.2 are excluded and replaced with nondefective and properly matched material.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:10Z
Check the source to verify that this is the current version before use.

TABLE I. Manufacturing Operations Requirements - Continued

No.	Manufacturing Operations Requirements	Stitch type	Seam and stitching type	Stitches per inch	Thread	
					Needle	Bobbin or Looper
3.	Marking (see 3.6.1)					
	a. Mark or bundle all component parts of the trunks to ensure a uniform shade and size throughout the trunks.					
4.	Join outseams and attach ornamentation.					
	Join outseams and attach ornamentation in one operation. The outseams shall be double-lapped and double-stitched seams. The ornamentation shall finish 5/16 to 3/8 inch in width with the side raw edges turned in and caught in the stitching.	301 or 401	LSau-2 except edges of stripping turned in	10-12 10-12	60-3 60-3	60-3 60-3
5.	Join front seam.					
	Join front seam with double-lapped and double-stitched seam.	301 or 401	LSc-2 LSc-2	10-12 10-12	60-3 60-3	60-3 60-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:10Z
Check the source to verify that this is the current version before use.

TABLE I. Manufacturing Operations Requirements - Continued

No.	Manufacturing Operations Requirements	Stitch type	Seam and stitching type	Stitches per inch	Thread	
					Needle	Bobbin or Looper
6.	Attach elastic webbing.					
	Turn in top edge of trunks 1/2 ± 1/8 inch and place ends of elastic 3/8 to 1/4 inch from raw edges of seat at waist. Stitch to trunks with four rows of stitching. The fullness shall be distributed evenly and the rows of stitching shall be 5/16 ± 1/16 inch apart with the outside rows 1/8 ± 1/16 inch from edges of elastic. The top folded edge of trunks shall not extend below the elastic or more than 1/8 inch above.	301 or 401	SSt-4 SSt-4	10-12 10-12	60-3 60-3	60-3 60-3
7.	Join seat and inseams.					
	a. Join seat seams with a double-lapped and double-stitched seam catching elastic webbing in stitching.	301 or 401	LSc-2 LSc-2	10-12 10-12	60-3 60-3	60-3 60-3
	b. Join inseams in one continuous operation with a double-lapped and double-stitched seam. Front and seat seams shall not be staggered more than 1/2 inch (measurement taken from center of seams).	301 or 401	LSc-2 LSc-2	10-12 10-12	60-3 60-3	60-3 60-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:10Z
Check the source to verify that this is the current version before use.

TABLE I. Manufacturing Operations Requirements - Continued

No.	Manufacturing Operations Requirements	Stitch type	Seam and stitching type	Stitches per inch	Thread	
					Needle	Bobbin or Looper
8.	Bind leg openings.					
	a. Bind leg openings with ends overlapping not less than 1 inch and not not more than 2 inches from the inseams on the back parts. Binding shall finish 5/16 to 3/8 inch in width. The lapping end of the binding shall be turned in and caught in the stitching.	301 or 401	BSc-1 BSc-1	10-12 10-12	60-3 60-3	60-3 60-3
	- or -					
	b. The lapping end of the binding may be turned to the inside of the leg opening and tacked or bartacked. The bartacks shall be 1/2 to 3/8 inch in length and the stitching shall be through the binding only. Linetacks shall be 1/2 inch. An automatic linetacker may be used.	301 or linetack or bartack	SSa-1	10-12 28 per tack 28 per bartack	60-3 60-3 60-3	60-3 60-3 60-3
9.	Attach label.					
	Position label on elastic webbing centered (1 1/4 inch off center tolerance) over seat seam and stitch along all four sides.	301	LAbj-1	8-10	60-3	60-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:10Z
Check the source to verify that this is the current version before use.

TABLE I. Manufacturing Operations Requirements - Continued

No.	Manufacturing Operations Requirements	Stitch type	Seam and stitching type	Stitches per inch	Thread	
					Needle	Bobbin or Looper
10.	Clean pants.					
	a. Trim all thread ends and remove loose threads.					
	b. Remove all spots, stains, and markings.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:10Z
Check the source to verify that this is the current version before use.

3.7 Finished measurements. The finished trunks shall conform to measurements as shown in table II.

3.8 Workmanship. The finished trunks shall conform to the quality of product established by this document. Occurrence of defects shall not exceed the applicable acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the document where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Certificate of compliance. When certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 Quality conformance inspection. Unless otherwise specified, sampling for inspection shall be performed in accordance with MIL-STD-105.

* 4.2.1 Component and material inspection. In accordance with 4.1, components and materials shall be inspected in accordance with all the requirements of referenced documents unless otherwise excluded, amended, modified, or qualified in this document or applicable purchase document. In addition to testing provisions contained in subsidiary documents, testing shall be performed on components listed in table III for characteristics noted. Unless otherwise indicated, testing shall be conducted in accordance with FED-STD-191. All test reports shall contain the individual values used in expressing the final result. The lot shall be unacceptable if one or more sample units fail to meet any of the test requirements specified. The lot size and sample size shall be in accordance with the following:

Lot size (yards)	Sample size (sample units)
800 or less	2
801 to 22,000 inclusive	3
22,001 and over	5

Source: https://assist.dla.mil -- Downloaded: 202640-21T23:10Z
Check the source to verify that this is the currentversion before use.

TABLE II. Sizes and measurements (in inches)

Size	X-Small	Small	Medium	Large	X-Large	XX-Large	Tolerance
Waist (relaxed) 1/	10	11	12	13	14	14	± 1/2
Waist (stretched) 2/	16 1/2	18	19	20	21	22	± 1/2
Inseam 3/	3 1/2	3 1/2	3 1/2	3 1/2	3 1/2	3 1/2	± 1/2
Outseam 4/	10 3/8	10 3/8	10 5/8	10 7/8	10 7/8	10 7/8	± 1/2
Front rise 5/	12 1/2	12 1/2	12 3/4	13	13	13	± 1/2
Back rise 6/	16	16	16 1/2	17 1/4	17 1/4	17 1/2	± 1/2

1/ Measured from side to side along top edge of waist.

2/ Measured from side to side along top edge of waist with waistband stretched taut in straight line using manual tension.

3/ Measured from center of crotch seam along inseam to bottom of leg opening.

4/ Measured from top of waist along outseam to bottom of leg opening.

5/ Measured from top of waist along front seam to the folded edge of inseam.

6/ Measured from top of waist along seat seam to the folded edge of inseam.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:10Z
Check the source to verify that this is the current version before use.

The basis for lot size and sample units for testing shall be as follows:

Component	Lot size expressed as	Sample unit for testing
Cotton or cotton/polyester twill cloth	yards	3 yard full width
Cotton or cotton/polyester cloth	yards	3 yard full width

TABLE III. Component tests

Component	Characteristics	Requirement paragraph	Test method
Cotton or cotton/polyester twill cloth	Material identification	3.2.1	1200, 2535 1/
	Weight, oz/sq yd	3.2.1	5041
	Yarns per inch	3.2.1	5050
	Breaking strength	3.2.1	5100
	Weave	3.2.1	Visual 2/
	Shrinkage	3.2.1	5550
	Color	3.2.1.1	Visual 2/
	Colorfastness to:		
	Perspiration	3.2.1.1	5680
	Laundering	3.2.1.1	5610
	Crocking	3.2.1.1	5651
	Labile sulfur	3.2.1.1	2020
	pH	3.2.1.2	2811
	Non-fibrous material	3.2.1.3	2611
Cotton or cotton/polyester cloth	Material identification	3.2.2	1200, 2535 1/
	Weight, oz/sq yd	3.2.2	5041
	Yarns per inch	3.2.2	5050
	Breaking strength	3.2.2	5100
	Weave	3.2.2	Visual 2/
	Shrinkage	3.2.2	5550
	Color	3.2.2.1	Visual 2/
	Colorfastness to:		
	Perspiration	3.2.2.2	5680
	Laundering	3.2.2.2	5610
	Crocking	3.2.2.2	5651

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:10Z
Check the source to verify that this is the current version before use.

TABLE III. Component tests - Continued

1/ Unless otherwise specified, a certificate of compliance is required and will be acceptable for the stated requirements.
2/ One determination shall be made from each sample unit and the results reported as "pass" or "fail".

* 4.2.2 Examination of the end item. An examination shall be made of the finished general purpose trunks for the defects listed in table IV. The lot size shall be expressed in units of trunks. The sample unit shall be one pair of trunks. The inspection level shall be II, and the acceptable quality level (AQL) shall be 4.0 for major defects and 10.0 for major and minor defects combined, expressed in terms of defects per hundred units.

TABLE IV. Classification of defects

Defects	Classification	
	Major	Minor
Material defects and damages:		
a. Any defect such as a multiple float or slub		201
b. Any hole, cut, tear, smash, mend, burn, or needle chew	101	
Shaded parts:		
Any outside part shaded (incorrectly matched)		202

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:10Z
Check the source to verify that this is the current version before use.

TABLE IV. Classification of defects - Continued

Defects	Classification	
	Major	Minor
Cleanness:		
a. Any spot or stain on outside		203
b. Thread ends not trimmed or loose threads not removed throughout trunks		204
c. Shade or size markings not removed, when applicable		205
d. Any holding or basting threads visible on finished trunks		206
Components and operations:		
a. Any component part or required operation omitted (unless otherwise classified herein)	102	
b. Any operation not performed as specified (unless otherwise classified herein)		207
Cutting:		
Any component part not cut in conformance with directional lines indicated on pattern or not cut in accordance with specification requirements	103	
Seams and stitching:		
a. Accuracy of seaming:		
1. Any part of trunks caught in an unrelated operation or stitching	104	
2. Seams twisted, puckered, or pleated		208
3. Ends of stitching (when not caught in other seams or stitching) backtacked less than 1/4 inch		209

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:10Z
Check the source to verify that this is the current version before use.

TABLE IV. Classification of defects - Continued

Defects	Classification	
	Major	Minor
Seams and stitching (continued)		
4. Thread breaks (all stitch types) secured by stitching back of the break, stitched less than 1/2 inch		210
5. Ends of a continuous line of stitching not overlapped or overlapped less than 1/2 inch or end of label stitching overlapped with less than 3 stitches		211
6. Various shades of thread used on outside of same pants (applicable to dyed threads)		212
b. Gage of stitching:		
1. Irregular, i.e., unevenly gaged or corresponding stitchings not uniformly gaged (to be scored when condition exists along major portion of seam)		213
2. Width not as specified or not within range of gage specified or varies more than 1/16 inch when no range is specified		214
3. Edge of raise stitching sewn too close to edge, resulting in damage to cloth	105	
4. Gage of double stitching less than 3/16 or more than 1/4 inch		215
c. Open seam:		
- more than 1/4 inch but not more than 3/4 inch		216
- more than 3/4 inch	106	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:10Z
Check the source to verify that this is the current version before use.

TABLE IV. Classification of defects - Continued

Defects	Classification	
	Major	Minor
Seams and stitching (continued)		
NOTE: One or more broken, or two or more continuous skipped or runoff stitches constitute an open seam.		
d. Raw edges:		
1. On outside:		
- more than 1 inch	107	
- more than 1/4 inch but not more than 1 inch		217
2. On inside:		
- more than 2 inches	108	
e. Seam and stitch types:		
1. Not specified seam or stitch type	109	
2. Looper thread of 401 stitch type finishing on outside of trunks	110	
f. Stitch tension:		
1. Loose tension resulting in a loose seam	111	
2. Loose tension on edge, raise, or double stitching resulting in a loosely exposed bobbin or top thread		218
3. Tight tension (stitches break when normal strain is applied to the seam or stitching)	112	
NOTE: Puckering is evidence of tight tension. When puckering is evident, seam shall be tested by exerting pull in lengthwise direction of the seam or stitching.		

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:10Z
Check the source to verify that this is the current version before use.

TABLE IV. Classification of defects - Continued

Defects	Classification	
	Major	Minor
Seams and stitching (continued)		
g. Stitches per inch:		
1. More than specified		219
2. Less than specified		
- one, two, or three stitches		220
- more than three stitches	113	
Bartacks or linetack (when used):		
a. One or both missing, insecure or misplaced not serving intended purpose		221
b. Bartack less than 1/2 inch or more than 5/8 inch in length		222
c. Linetack less than 1/2 inch in length		223
Elastic waistband:		
a. Fullness not evenly distributed in stitching elastic webbing to top of trunks		226
b. Top folded edge of trunks extending more than 1/8 inch above top edge of webbing or not extending below top edge of webbing		227
c. Elastic webbing stitched to top of trunks with less than four rows of stitching	116	
d. Outside rows of stitching less than 1/16 inch or more than 3/16 inch from edges of elastic webbing		228
e. Gage of stitching less than 1/4 inch or more than 3/8 inch		229
f. Webbing not cut in one piece	117	
g. Three or more broken elastic strands in webbing	118	
h. Ends of elastic webbing not caught in stitching		230

Source: https://assist.dla.mil -- Downloaded: 202610-21T23:10Z
Check the source to verify that this is the current version before use.

TABLE IV. Classification of defects - Continued

Defects	Classification	
	Major	Minor
Seat and front seams:		
Staggered more than 1/2 inch (measured from center of seams)		231
Binding and ornamentation:		
a. Less than 5/16 inch or more than 3/8 inch in width		232
b. End of binding not turned in and caught in the stitching, or not turned to inside of leg		233
c. Lapping end of binding more than 2 inches from inseam on the back part		234
d. Tacking or bartacking ends of binding (when applicable) not through binding only		235
e. Ornamentation not attached when joining outseams	119	
f. More than one piecing visible		236
Label:		
a. Missing, incorrect, or illegible	120	
b. Not stitched on all four sides		237
c. Not positioned as specified, or off-center over seat seam by more than 1 ± 1/4 inch		238

4.2.2.1 Dimensional examination. Any measurement deviating from the dimension and tolerance specified in table II shall be classified as a defect. The lot size shall be expressed in units of trunks. The sample unit shall be one pair of trunks. The inspection level shall be S-3, and the AQL shall be 4.0, expressed in terms of defects per hundred units.

Source: https://assist.dla.mil -- Downloaded: 202640-21T23:10Z
Check the source to verify that this is the current version before use.

4.2.3 Packaging inspection. An examination shall be made to determine that the preservation, packing, and marking comply with the section 5 requirements. Defects shall be scored in accordance with table V. The lot size shall be the number of shipping containers in the inspection lot. The sample unit shall be one shipping container fully packaged. The inspection level shall be S-2, and the AQL shall be 2.5, expressed in terms of defects per hundred units.

TABLE V. Packaging inspection

Examine	Defects
Marking (exterior and unit pack)	Omitted, incorrect, illegible, or of improper size, location, sequence, or method of application
Materials	Any component missing, damaged, or not as specified
Workmanship	Inadequate application of components, such as: incomplete closure of container flap, loose strapping, improper taping, or inadequate stapling Open and non-continuous heat-sealed seams and closure of polyethylene bag. Omission of vent hole in polyethylene bag. Alternative closure of the polyethylene bag not provided with tuck or reverse flap. Incorrectly fabricated bag. 1/ Bulged or distorted container
Content	Number of unit packs per shipping container is more or less than required.

1/ For this defect, one unit pack shall be examined from each shipping container.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:10Z
Check the source to verify that this is the current version before use.

4.2.4 Palletization inspection. An examination shall be made to determine that the palletization complies with the section 5 requirements. Defects shall be scored in accordance with table VI. The lot size shall be the number of palletized unit loads in the inspection lot. The sample unit shall be one palletized unit load fully packaged. The inspection level shall be S-1, and the AQL shall be 6.5, expressed in terms of defects per hundred units.

TABLE VI. Palletization inspection

Examine	Defect
Finished dimensions	Length, width, or height exceeds specified maximum requirements
Palletization	Pallet pattern not as specified Interlocking of loads not as specified Load not bonded with required straps as specified
Weight	Exceeds maximum load limits
Marking	Omitted, incorrect, illegible, or of improper size, location, sequence, or method of application

5. PACKAGING

5.1 Preservation. Preservation shall be level A or Commercial, as specified (see 6.2).

5.1.1 Level A. Each pair of trunks shall be neatly folded and then inserted in a close-fitting clear polyethylene film bag having a thickness of 0.00125 inch (± 25 percent tolerance). The bag shall be formed with heat-sealed seams that are straight, continuous, and parallel to each other and to the formed edges of the bag. The final closure of the bag shall be heat-sealed with the heat-seal made as close as possible to the open end. The bag may be fabricated from polyethylene film tubing or sheeting. A 1/4-inch

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:10Z
Check the source to verify that this is the current version before use.

diameter hole shall be made at one corner of the polyethylene bag to allow excess air to escape. Alternatively, the final closure of the polyethylene bag may be accomplished by means of a tuck or reverse flap.

5.1.2 Commercial . Trunks shall be preserved in accordance with ASTM D 3951.

5.2 Packing. Packing shall be level A, B, or Commercial, as specified (see 6.2).

5.2.1 Level A packing. Sixty pairs of trunks of one size, preserved as specified in 5.1, shall be packed flat in a snug-fitting fiberboard shipping container conforming to style RSC-L, grade V2s of PPP-B-636. The inside of each shipping container shall be fitted with a box liner conforming to type CF, class weather-resistant, variety DW, grade V15c of PPP-B-636. Each shipping container shall be closed in accordance with method III, waterproofed in accordance with method V, and reinforced as specified in the appendix of PPP-B-636, except that the inspection shall be in accordance with 4.2.3. Toward the end of the contract or when there are less than the required amount per container of the same size, mixed sizes may be packed within the same container.

5.2.2 Level B packing. Sixty pairs of trunks of one size, preserved as specified in 5.1, shall be packed flat in a snug-fitting fiberboard shipping container conforming to style RSC-L, type CF (variety SW) or SF, class domestic, grade 200 of PPP-B-636. The inside of each shipping container shall be fitted with a box liner conforming to type CF, class domestic, variety DW, grade 275 of PPP-B-636. Each container shall be closed in accordance with method II as specified in the appendix of PPP-B-636, except that the inspection shall be in accordance with 4.2.3. Toward the end of the contract or when there are less than the required amount per container of the same size, mixed sizes may be packed within the same container.

5.2.2.1 Weather-resistant fiberboard containers. When specified (see 6.2), the shipping container shall be a grade V3c, V3s, or V4s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with method III in the appendix of PPP-B-636, except that the inspection shall be in accordance with 4.2.3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:10Z
Check the source to verify that this is the current version before use.

* 5.2.3 Commercial packing. Trunks, preserved as specified in 5.1, shall be packed in accordance with ASTM D 3951.

5.3 Palletization. When specified (see 6.2), exerciser trunks, packed as specified in 5.1, shall be palletized on a 4-way entry pallet in accordance with load type Ia of MIL-STD-147. Pallet type shall be type I (4-way entry), type IV, or type V in accordance with MIL-STD-147. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means K and L or film bonding means O or P. Pallet patterns shall be in accordance with the appendix of MIL-STD-147. Interlocking of loads shall be effected by reversing the pattern of each course. If the container is of a size that does not conform to any of the patterns specified in MIL-STD-147, the pallet pattern used shall first be approved by the contracting officer.

5.4 Marking. In addition to any special marking required by the contract or purchase order, unit packs, shipping containers, and palletized unit loads shall be marked in accordance with MIL-STD-129 or ASTM D 3951, as applicable.

5.4.1 Polyethylene bagged unit packs. Polyethylene bagged unit packs shall have the required identification information legibly printed or stamped in black directly on the bag across the center face or on a white paper label inserted within the bag so as to permit ready identification.

5.4.2 Labels, mixed sizes. Each shipping container packed with mixed sizes shall have securely attached to the end and side, directly under the printing or stenciling, a white paper label 5 by 4 inches with the words "MIXED NSN's" plainly printed or stamped thereon and under these words shall be legibly printed or stamped the correct quantity and NSN's contained therein.

6. NOTES

6.1 Intended use. The trunks are intended for wear by male personnel of the Department of the Army.

6.2 Ordering data. Acquisition documents should specify the following:

a. Title, number, and date of this document.
b. Sizes required (see 1.2).
c. Selection of the applicable levels of preservation and packing (see 5.1 and 5.2).
d. When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).
e. When palletization is required (see 5.3).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:10Z
Check the source to verify that this is the current version before use.

6.3 Sample. For access to sample of the end item and shade samples, address the procuring activity issuing the invitation for bids.

6.4 Changes from previous issue. The margins of this document are marked with an asterisk (*) to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only, and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodian:

Army - GL

Review activity:

Army - MD

Preparing activity:

Army - GL

Project No. 8415-0462

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:10Z
Check the source to verify that this is the current version before use.

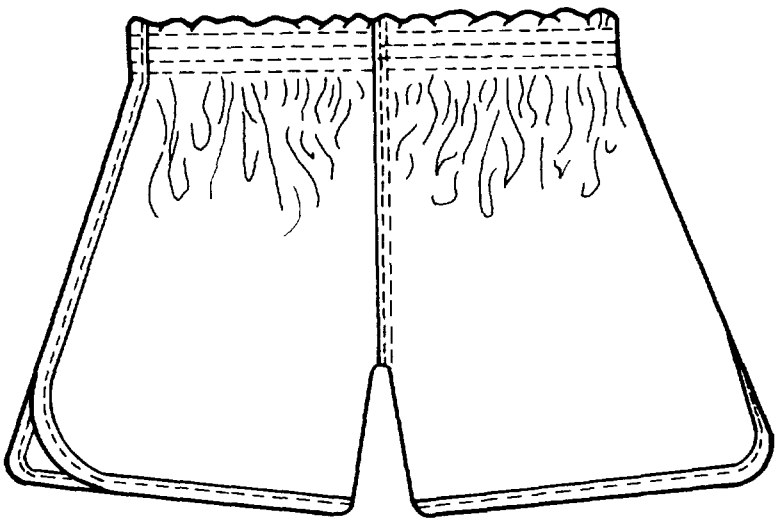


Figure 1 Trunks, General Purpose: Exerciser

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:10Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY
US Army Natick Research and Development Center
Natick, Massachusetts 01760

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300
STRNC-ES

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US Army Natick Research and Development Center
ATTN: STRNC-ES
Natick, MA 01760

Source: https://assist.dla.mil -- Downloaded: 202610-21T23:10Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-T-43955B	TRUNKS, GENERAL PURPOSE: EXERCISER

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
	☐ USER
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

NATICK OP 1 Apr 84

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:10Z
Check the source to verify that this is the current version before use.