NOT MEASUREMENT SENSITIVE

MIL-DTL-11484/348B(IH)
10 March 2023
SUPERSEDING
MIL-DTL-11484/348A(IH)
14 August 2017


DETAIL SPECIFICATION SHEET

LAPEL BUTTON, U.S. INTELLIGENCE COMMUNITY AWARD, DIRECTOR OF NATIONAL INTELLIGENCE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-11484.

Ring shaded gray shall be filled with BLUE #20.

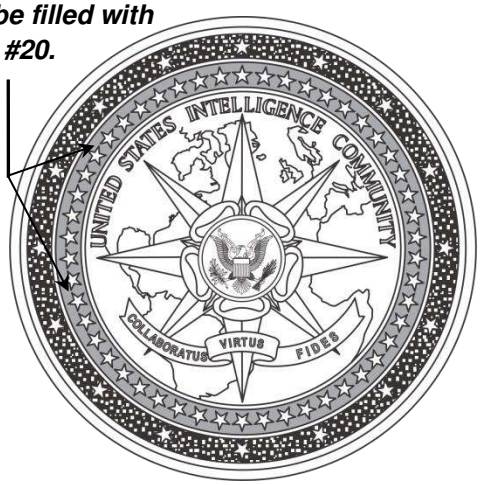

DASH NUMBERS:
-1 Bronze Award
-2 Silver Award
-3 Gold Award
-4 Two-Tone Award

MATERIAL (-1, -2, -3, and -4): Red Brass 85/15 (UNS Alloy No. C-230)

FINISH:
-1: Brass, Oxidized, Buffed Relieved, Polished Highlights, and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 5.

AMSC N/A FSC 8455

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:00Z
Check the source to verify that this is the current version before use.

-2: Silver Plated, Oxidized, Buffed Relieved, Matte Finish, Polished Highlights, and shall match TIOH Metal Finish Chip Number 15.

-3: 24K Gold Plated, Matte Finish, Polished Highlights, and shall match TIOH Metal Finish Chip Number 8.

-4: SILVER: All rims, outer ring of stars, stars within inner ring, background disc with landmasses, and lettering arched over center insignia shall be Nickel Plated, Matte Finish, and shall match TIOH Metal Finish Chip Number17.
GOLD: The stars in outer ring, center insignia (polestar, rose, American eagle, and scroll with inscription at bottom of star) shall be 24K Gold Plated, Matte Finish, Polished Highlights, and shall match TIOH Metal Finish Chip Number 8.

DIMENSIONS:
DIAMETER (-1, -2, -3, and -4): 11/16 inch (REF)
THICKNESS (At rim):
-1, -3: 0.0675 ± 0.010 inch
-2, -4: 0.0735 ± 0.010 inch

ATTACHING DEVICE: The attaching device shall be a prong with pick and wing type clutch. The prong shall be centered on the reverse side and either fused or hard soldered to the lapel button.

EPOXY: Epoxy enamel shall be applied to the lapel button only as indicated above, and shall match TIOH Hard Enamel Color Chip Number listed:

TIOH HARD ENAMEL COLOR CHIP NUMBER	LOCATION
Blue #20	Inner Ring of Stars

NOTES:
1. The term (REF) refers to measurements taken from the Government furnished hub or die.

2. For -3 and -4, the manufacturer may deviate from MIL-DTL-11484 by using nickel underplating prior to plating with 24K gold.

3. This item is not authorized for commercial sale, and may be produced only under Government contract and at the request of the Office of the Director of National Intelligence.

4. Hard cloisonné enamel may be used in lieu of epoxy. If hard cloisonné enamel is used, the required base material shall be Gilding Metal 95/5 (UNS Alloy C-210).

CHANGES FROM PREVIOUS ISSUE: The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:00Z
Check the source to verify that this is the current version before use.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review Activity:
DLA - CT

(Project No. 8455-2023-107)

Civil Agency:
ODNI - NIAP

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:00Z
Check the source to verify that this is the current version before use.