INCH-POUND
MIL-S-15743/3A(SH)
22 November 1993
SUPERSEDING
MIL-S-15743/3(SH)
27 August 1984

MILITARY SPECIFICATION SHEET

SWITCHES, ROTARY, ENCLOSED, SUBMERSIBLE (15 FEET), SNAP ACTION, 125 VOLTS ALTERNATING CURRENT, 10 AMPERE, SYMBOLS 801.2 (DPST), 804.1 (TPST), 829.1 (DPDT), AND 879.1 (DPTT)

This specification sheet is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-S-15743.

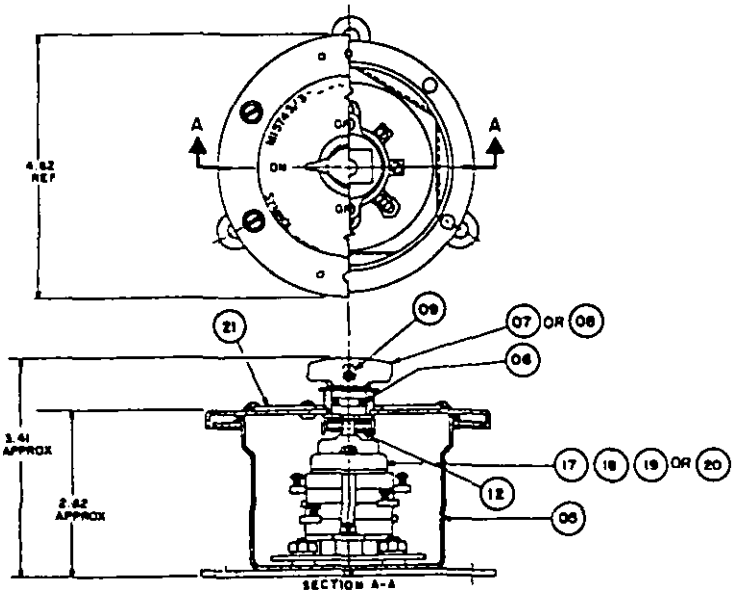


FIGURE 1. Switch, enclosed. (01) (02) (03) (04)
(-001 shown)

NOTES:
1. All dimensions in inches.
2. Unless otherwise specified herein, tolerances shall be as follows:
   Two place decimals - plus or minus 0.02.
   Three place decimals - plus or minus 0.005.
   Angular dimensions - plus or minus 30 minutes.

AMSC N/A FSC 5930

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:56Z
Check the source to verify that this is the current version before use.

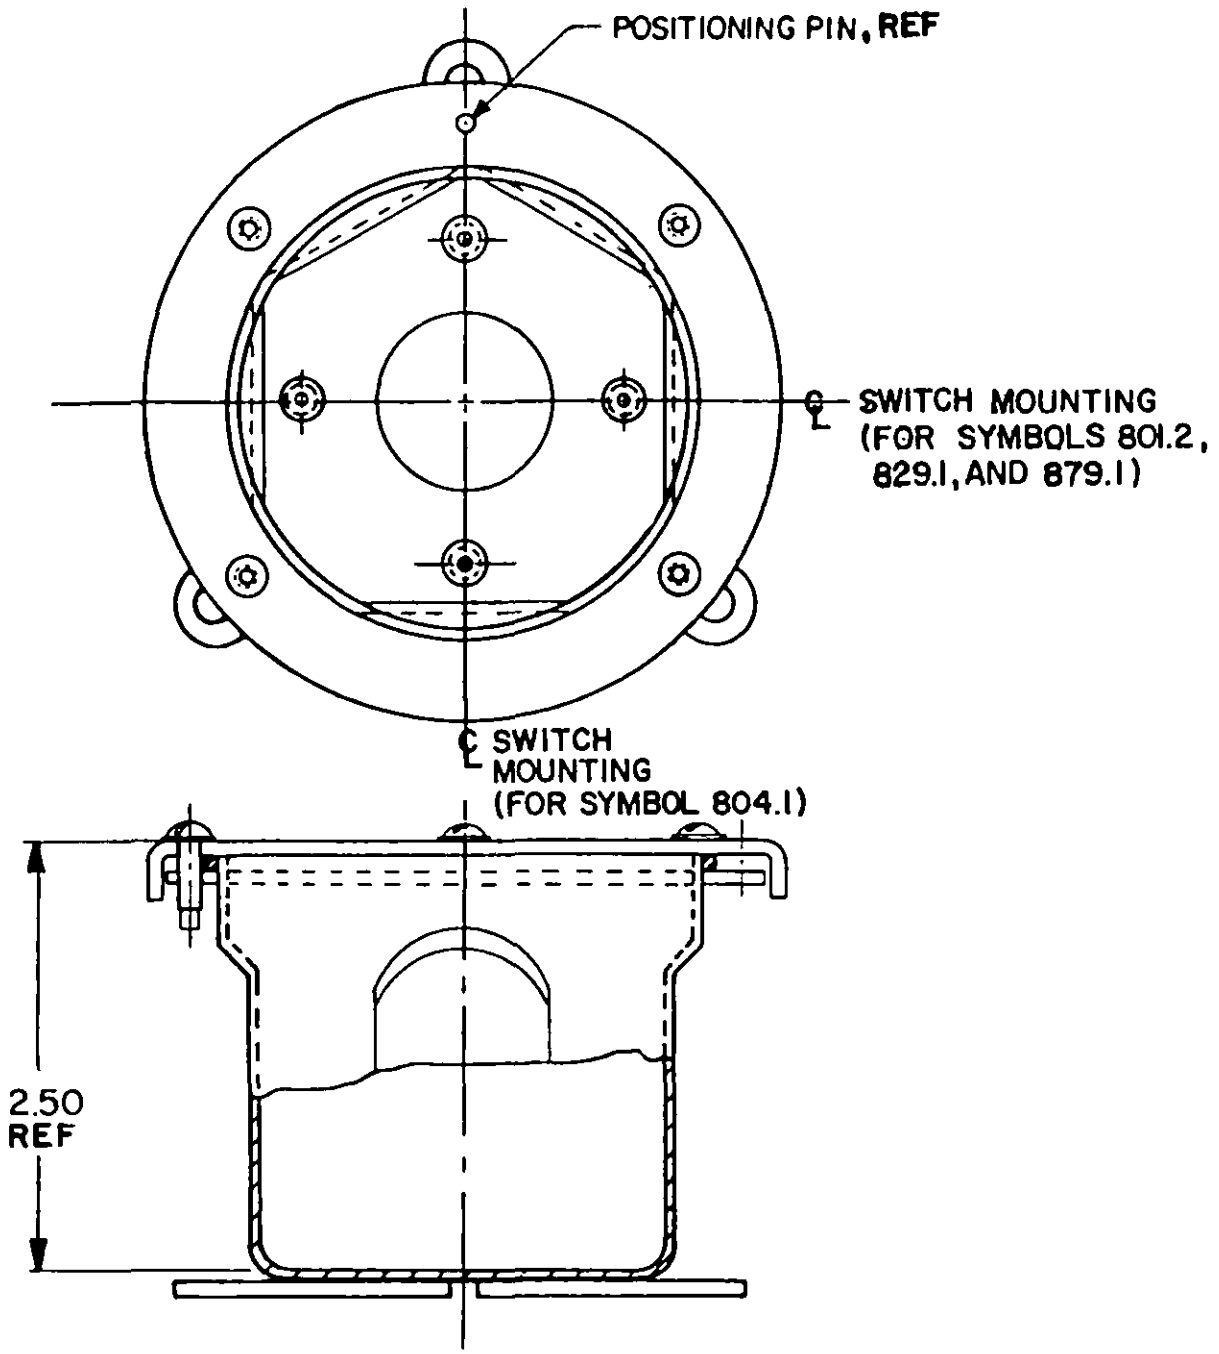


FIGURE 2. Box assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:56Z
Check the source to verify that this is the current version before use.



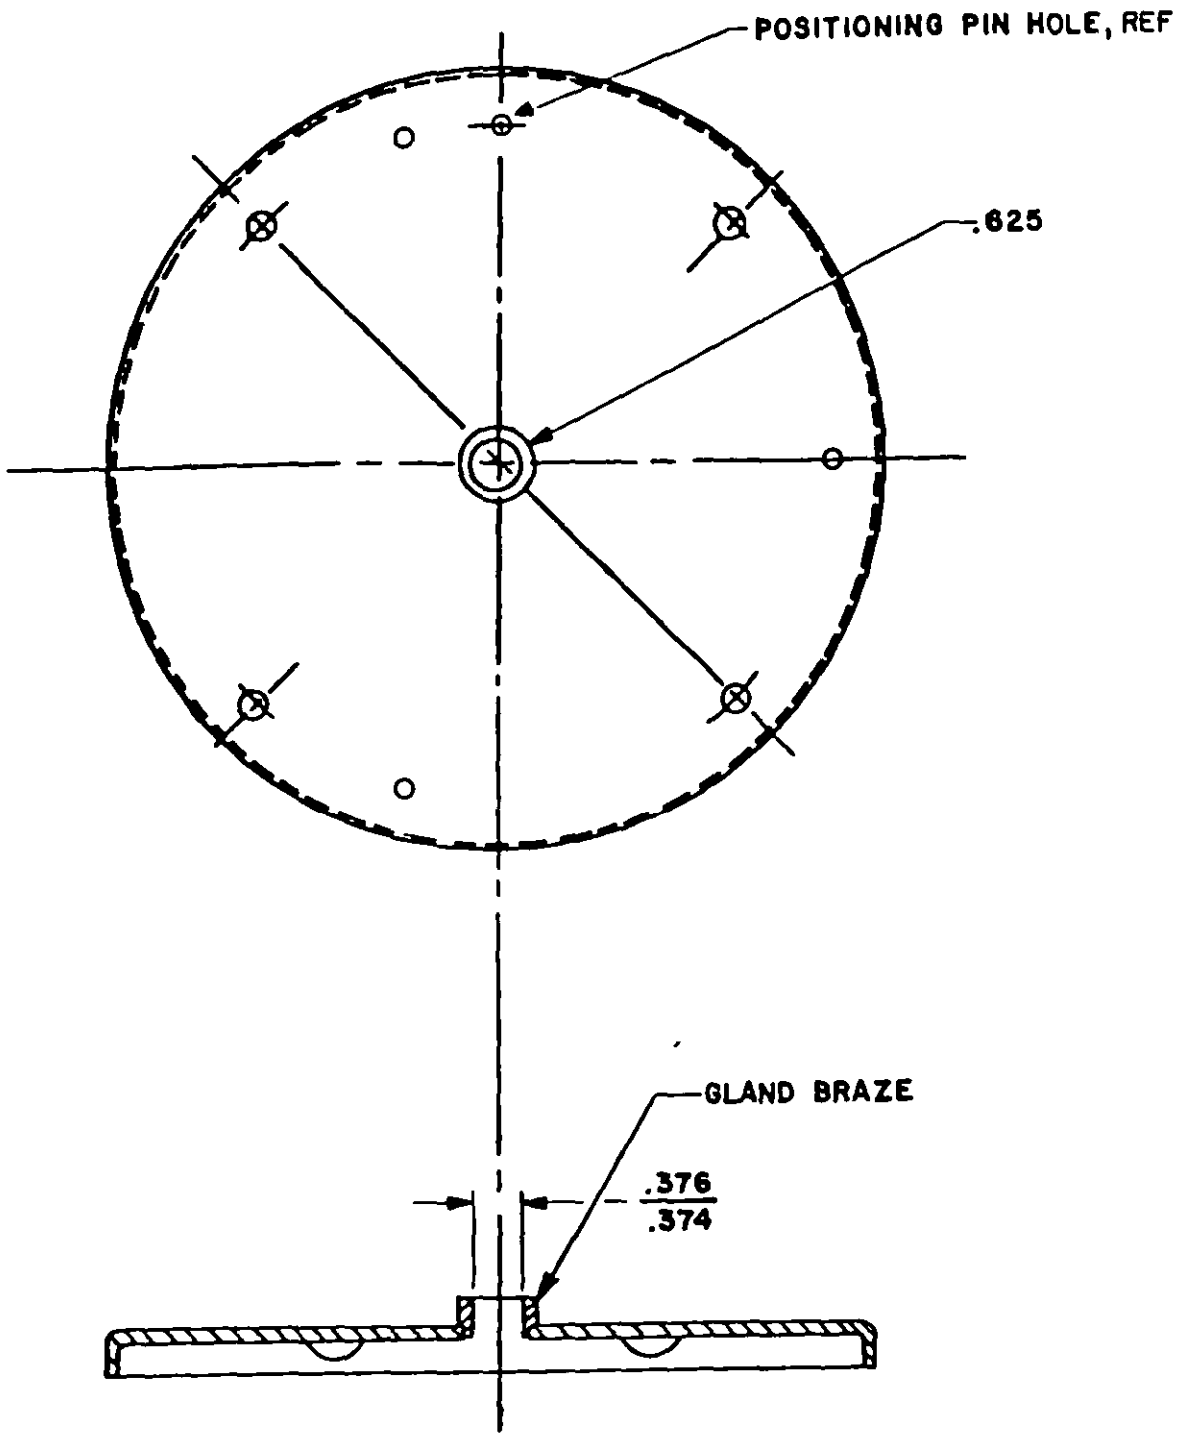


FIGURE 3. Cover assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:56Z
Check the source to verify that this is the current version before use.

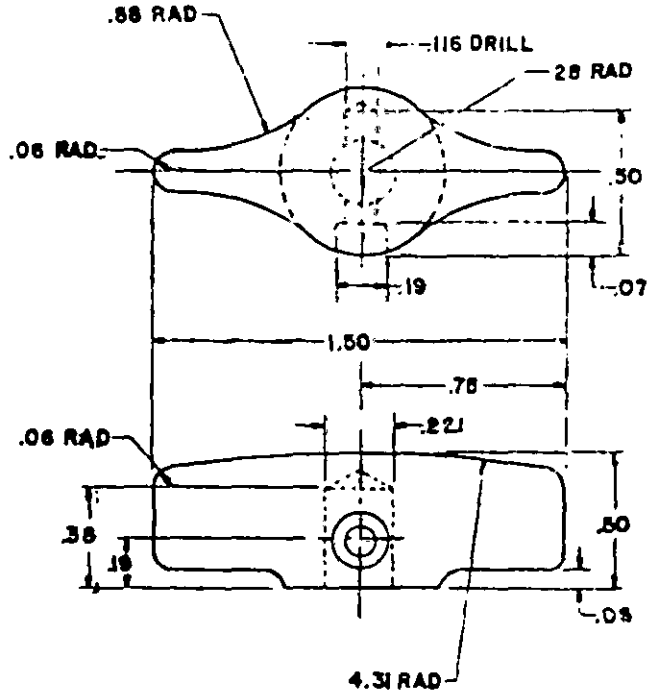

A. Symbols 801.2, 804.1, and 829.1 (07)

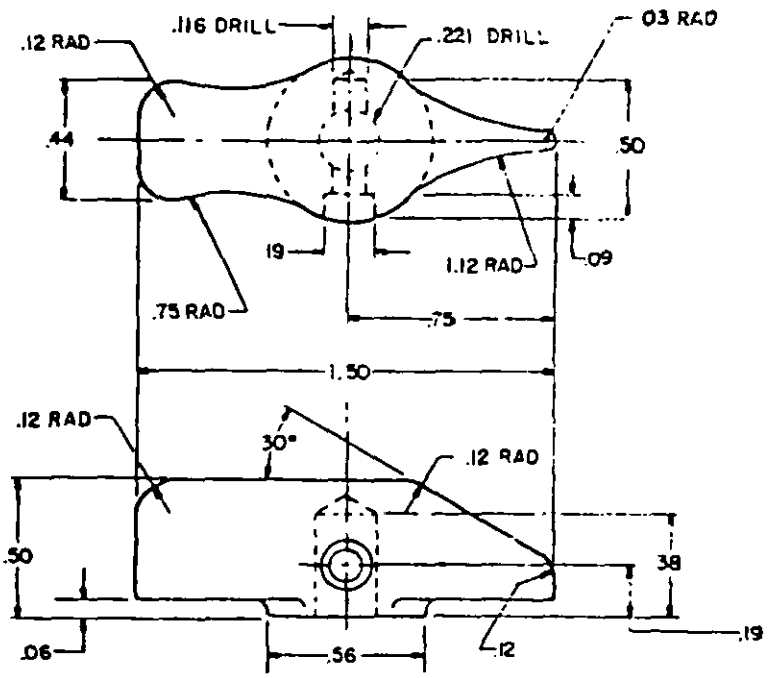

B. Symbol 879.1 (08)

FIGURE 4. Handles.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:56Z
Check the source to verify that this is the current version before use.

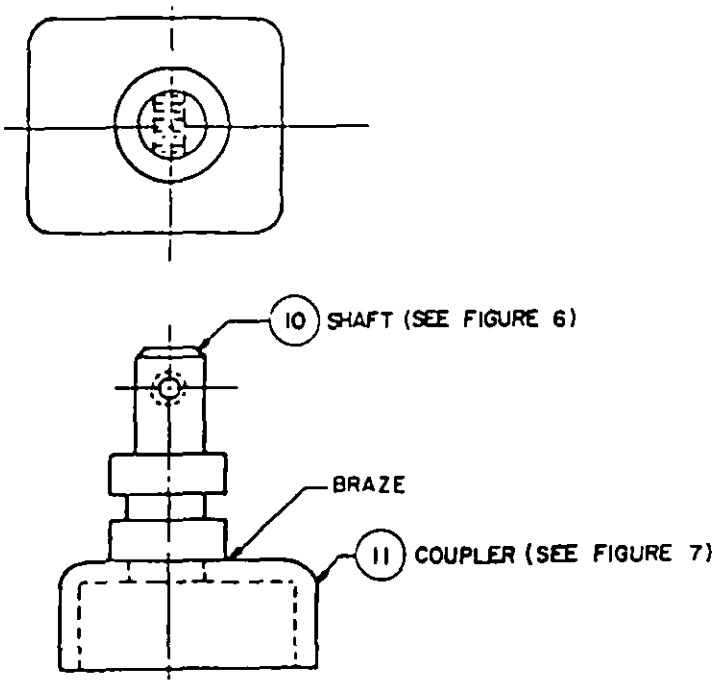


FIGURE 5. Shaft assembly. (09)

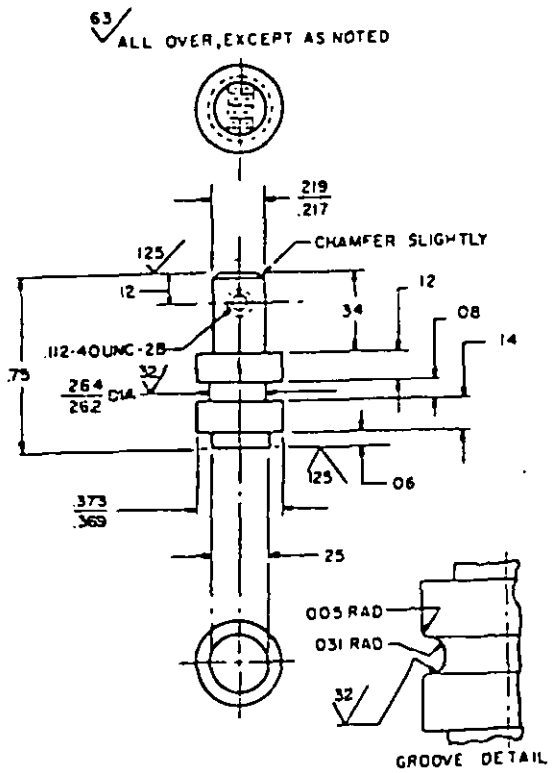


FIGURE 6. Shaft. (10)

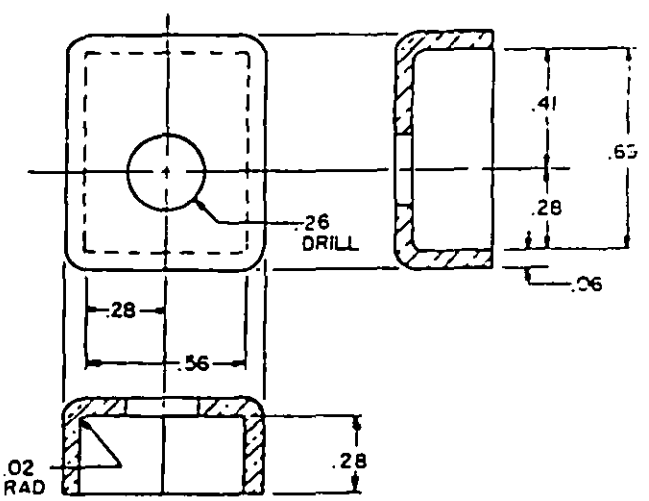


FIGURE 7. Coupler. (11)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:56Z
Check the source to verify that this is the current version before use.

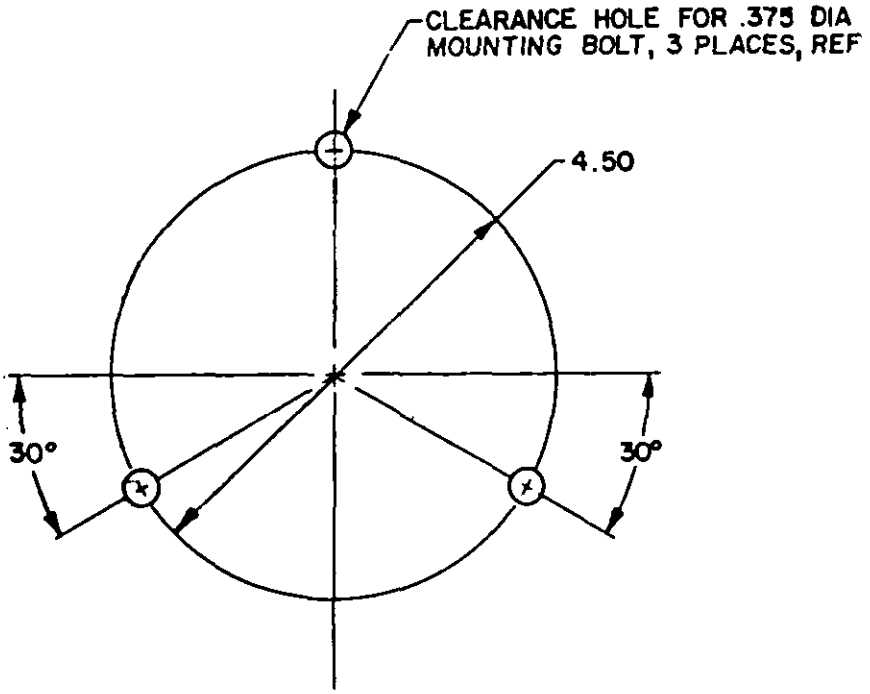


FIGURE 8. Coupler plate. (12)



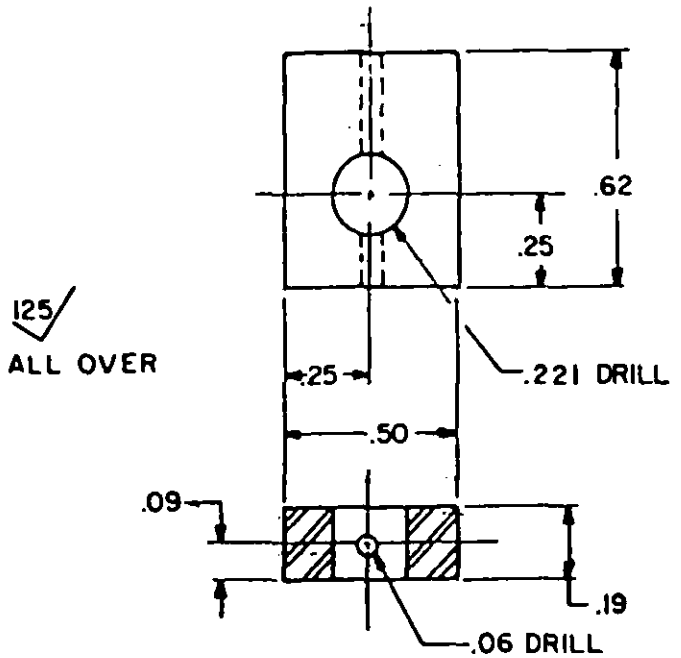


FIGURE 9. Mounting dimensions, ref.


Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:56Z
Check the source to verify that this is the current version before use.

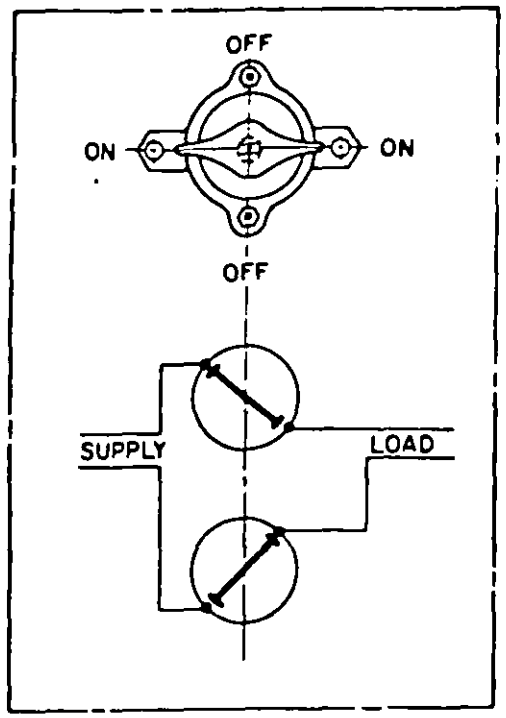


A. Symbol 801.2 (13)

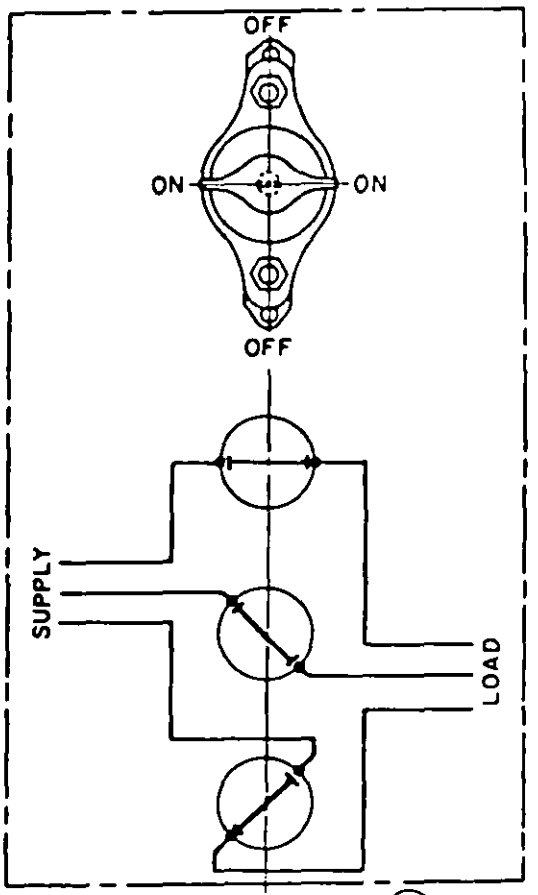

B. Symbol 804.1 (14)

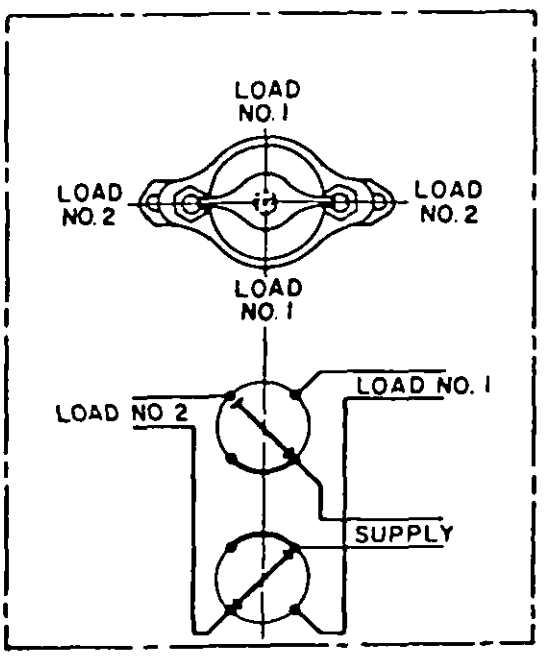

C. Symbol 829.1 (15)

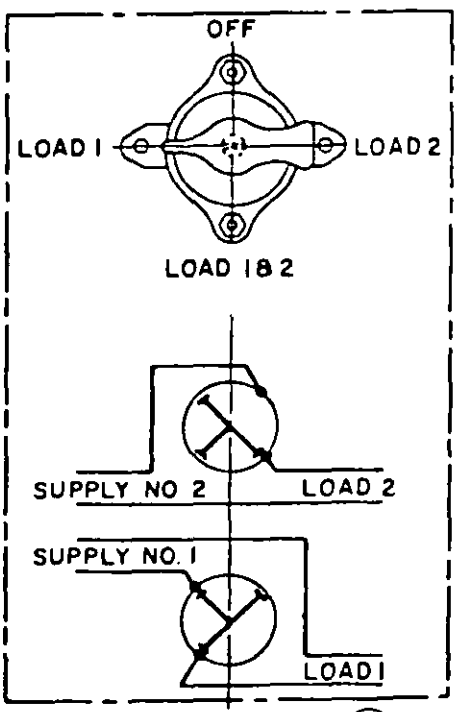

D. Symbol 879.1 (16)

FIGURE 10. Wiring diagrams.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:56Z
Check the source to verify that this is the current version before use.

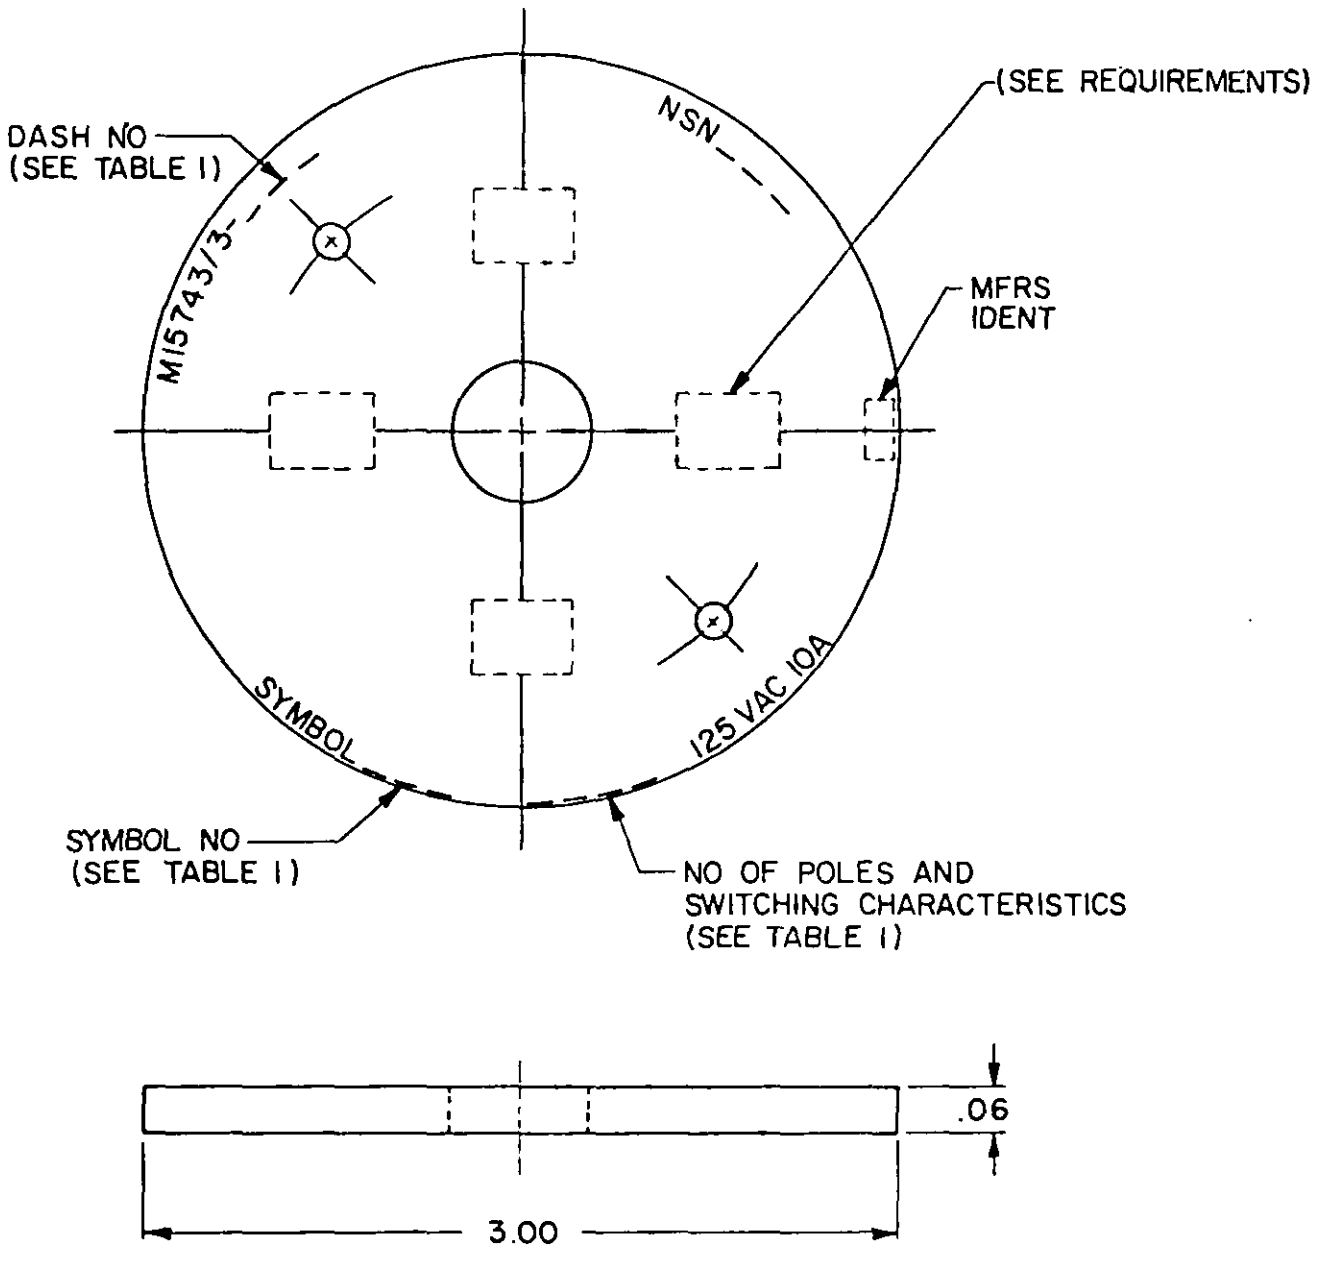


FIGURE 11. Identification plate. (21)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:56Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

SYMBOL NUMBER: See table I.

DESIGN:

Electrical rating: 125 Va.c., 0-10 ampere, 60 Hz.
Dimensions and configuration: See figures 1 through 8.
Wiring diagram: See figure 10.
Mounting dimensions: See figure 9.
Degree of enclosure: Submersible (15 feet).
Weight:
(a) Symbols 801.2, 804.1, and 829.1 2 pounds maximum.
(b) Symbol 879.1 3 pounds maximum.
Designation and marking: See figure 11.
Identification data shall be as shown on figure 11. Unless otherwise specified in the ordering data, ON-OFF switch action marking shall be as shown on figure 10 and all others shall be left blank.
Parts: The parts shown in table II and as specified in MIL-S-15743 shall be used in the construction of the switches specified herein.

GENERAL INFORMATION:

Military part numbers and general information are as shown in table I.

TABLE I. Military part number and general information.

Military part no.	Symbol no.	No. of poles and switching characteristics	Supersedes 1/		
			Type	Unit	Sheet
M15743/3-001	801.2	DPST	1SR2A4-4	1	2
M15743/3-002	804.1	TPST	1SR3A4-2	4	5
M15743/3-003	829.1	DPDT	1SR2C4a-2	2	3
M15743/3-004	879.1	DPTT	1SR2F4-2	3	4

1/ NAVSEA Drawing 9000-S6202-74207, in part.

ORDERING DATA:

Acquisition documents should specify the following:
Switch action marking, if required (see requirements).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:56Z
Check the source to verify that this is the current version before use.

TABLE II. Parts list.

Item no.1/	Description	Quantity M15743/3-				Material/specification	Remarks
		001	002	003	004		
01	Switch, enclosed (sym 801.2)	-					See figure 1
02	Switch, enclosed (sym 804.1)		-				See figure 1
03	Switch, enclosed (sym 829.1)			-			See figure 1
04	Switch, enclosed (sym 879.1)				-		See figure 1
05	Enclosure	1	1	1	1	Brass, MIL-E-24142/5 (modified)	See figure 2 & 3 M24142/5-001
06	O-ring	1	1	1	1	MS28775-010	----
07	Handle	1	1	1		Copper alloy ASTM B 584	See figure 4a
08	Handle				1	Copper alloy ASTM B 584	See figure 4b
09	Shaft assembly	1	1	1	1	----	See figure 5
10	Shaft	1	1	1	1	Ni-Cu alloy of QQ-N-281	See figure 6
11	Coupler	1	1	1	1	Brass, ASTM B 36, ASTM B 121	See figure 7
12	Coupler plate	1	1	1	1	CRES, class 304 or 316 of QQ-S-766	See figure 8
13	Wiring diagram	1				MIL-E-2036	See figure 10a
14	Wiring diagram		1			MIL-E-2036	See figure 10b
15	Wiring diagram			1		MIL-E-2036	See figure 10c
16	Wiring diagram				1	MIL-E-2036	See figure 10d
17	Switch (type 1SR2A4)	1				MIL-S-15291/3	M15291/3-002
18	Switch (type 1SR3A4)		1			MIL-S-15291/3	M15291/3-004
19	Switch (type 1SR2C4a)			1		MIL-S-15291/3	M15291/3-016
20	Switch (type 1SR2F4)				1	MIL-S-15291/3	M15291/3-021
21	Identification plate	1	1	1	1	ASTM B 36, ASTM B 121	See figure 11

1/ Numbers in circles shown on the figures are the same as the item numbers shown in this table.

Revision letters are not used to denote changes due to the extensiveness of the changes.

Preparing activity:
Navy - SH
(Project 5930-N746-3)

Source: https://assist.dla.mil -- Downloaded: 202640-18T07:56Z
Check the source to verify that this is the current version before use.