INCH-POUND
MIL-DTL-15743/3E
18 April 2026
SUPERSEDING
MIL-DTL-15743/3D
17 March 2021

DETAIL SPECIFICATION SHEET

SWITCHES, ROTARY, ENCLOSED, SUBMERSIBLE (15 FEET), SNAP ACTION, 125 VOLTS ALTERNATING CURRENT, 10 AMPERE, SYMBOLS 801.2 (DPST), 804.1 (TPST), 829.1 (DPDT), AND 879.1 (DPTT)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification and the latest issue of MIL-DTL-15743.

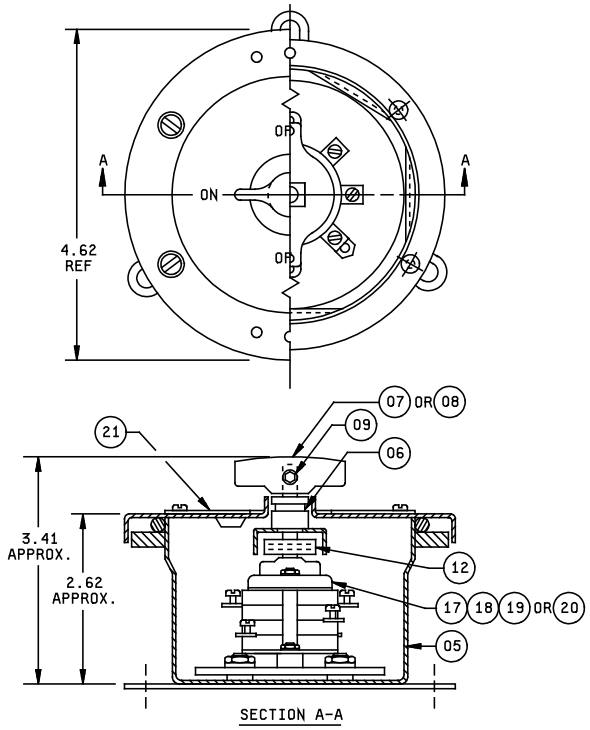


FIGURE 1. Switch enclosed. (01, 02, 03, 04)
(-001 shown)

NOTES:
1. All dimensions in inches.
2. Unless otherwise specified herein, tolerances shall be as follows:
   Two place decimals - plus or minus 0.02.
   Three place decimals - plus or minus 0.005.
   Angular dimensions - plus or minus 30 minutes.

AMSC N/A
FSC 5930
DISTRIBUTION STATEMENT A. Approved for public release. Distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:56Z
Check the source to verify that this is the current version before use.

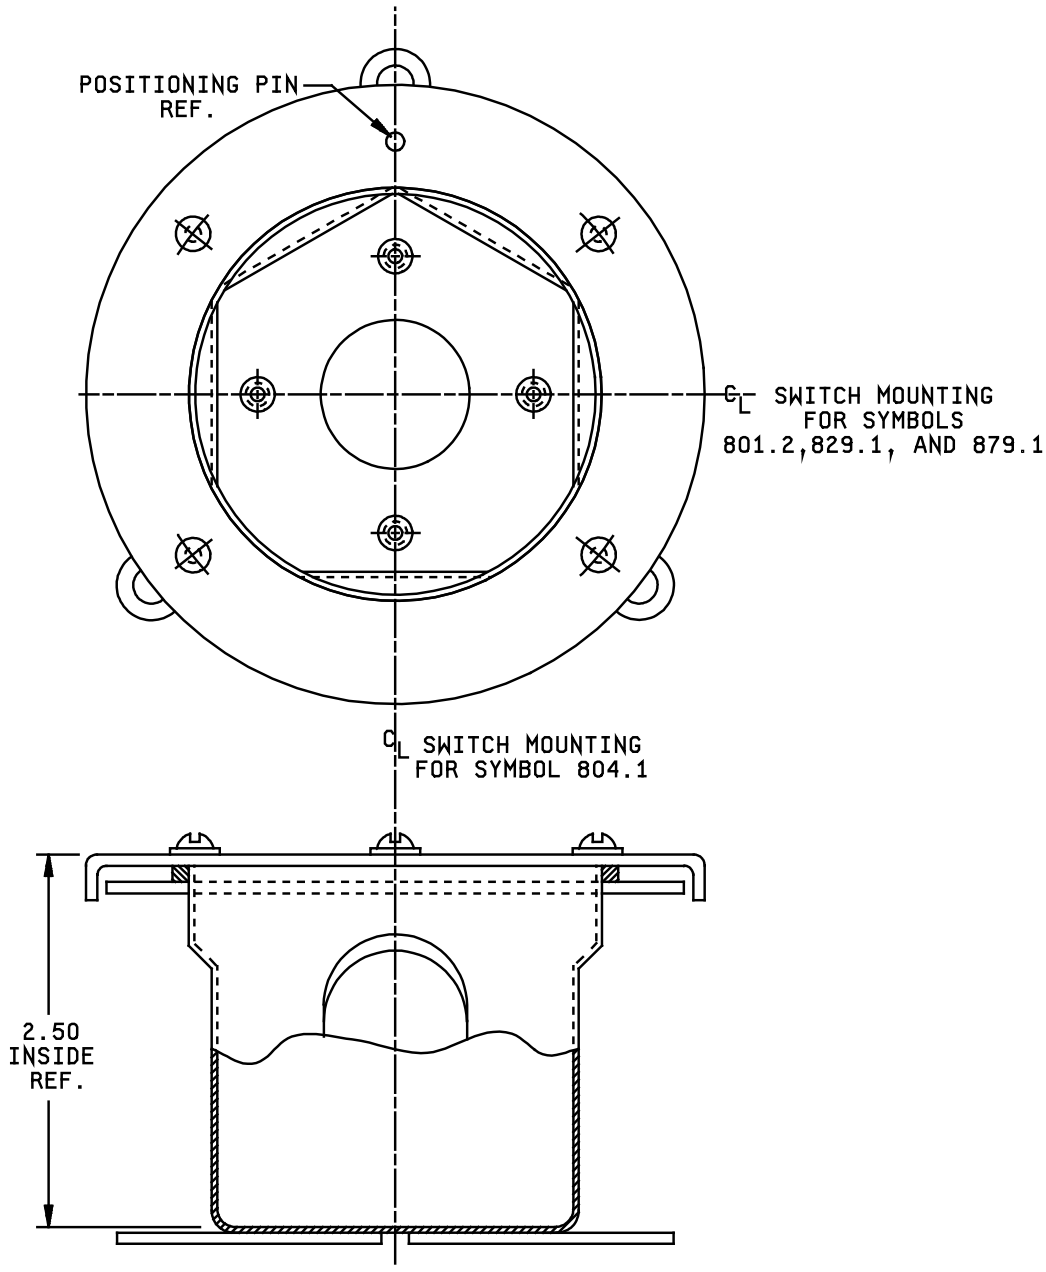


FIGURE 2. Box assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:56Z
Check the source to verify that this is the current version before use.



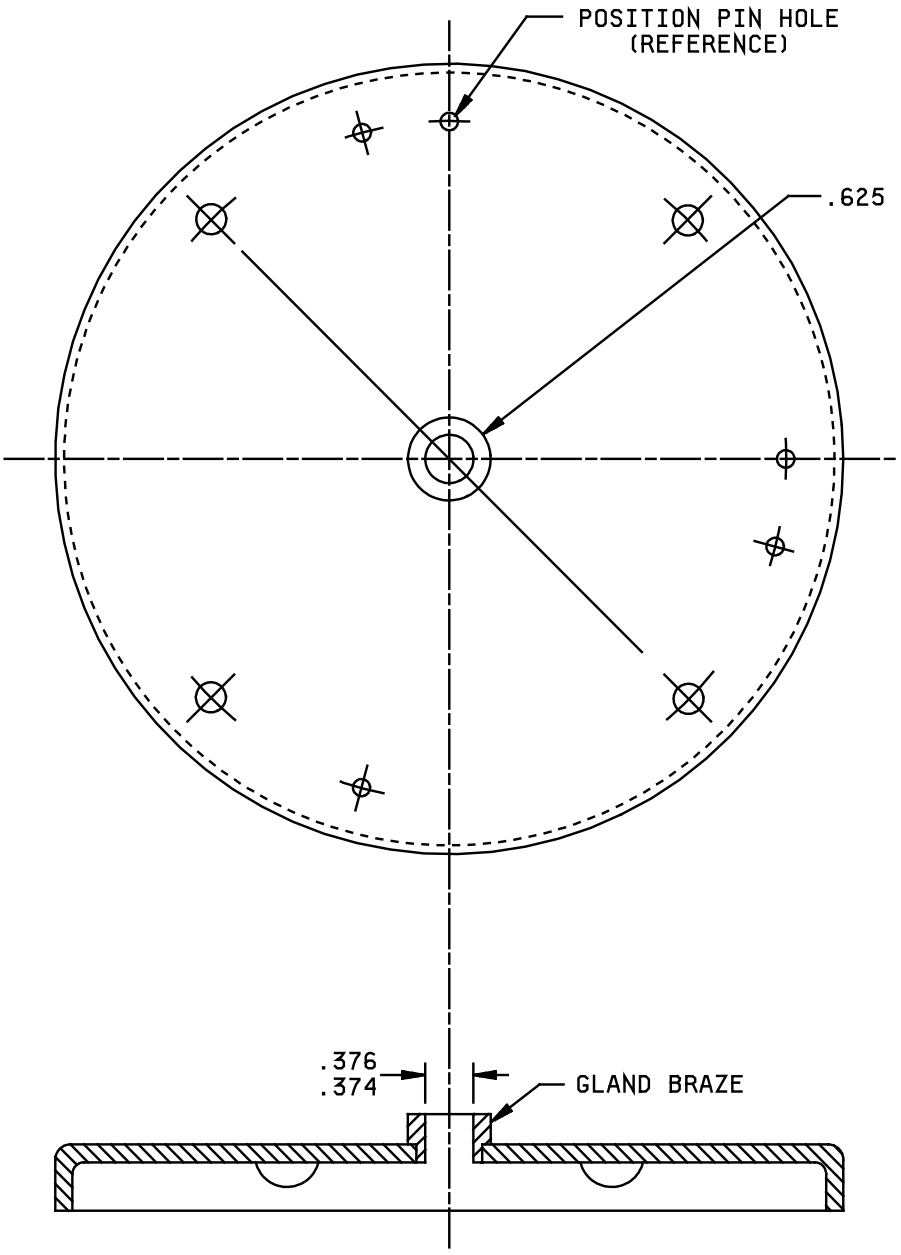


FIGURE 3. Cover assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:56Z
Check the source to verify that this is the current version before use.

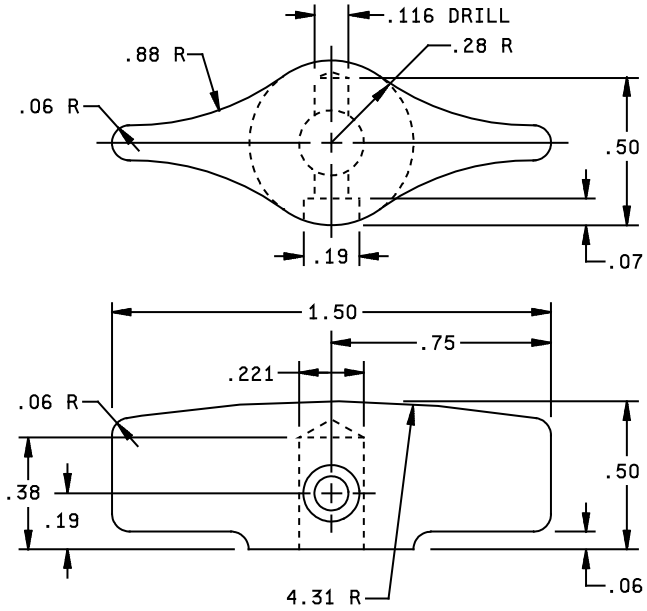

A. SYMBOLS 801.2,804.1,AND 829.1

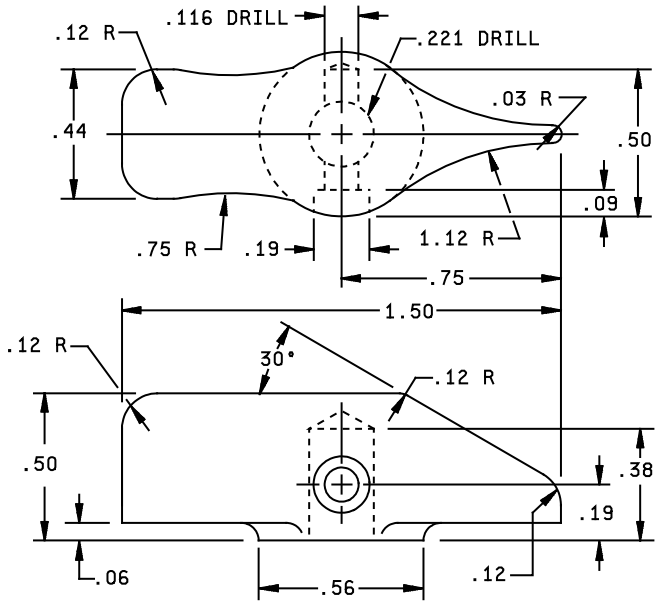

B. SYMBOL 879.1

FIGURE 4. Handles. 07, 08

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:56Z
Check the source to verify that this is the current version before use.

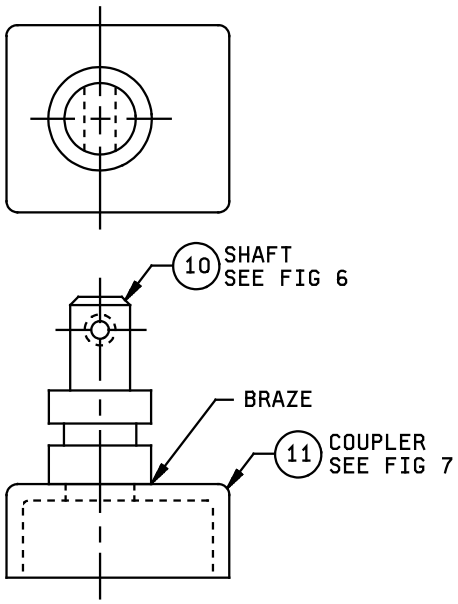


FIGURE 5. Shaft assembly. 09

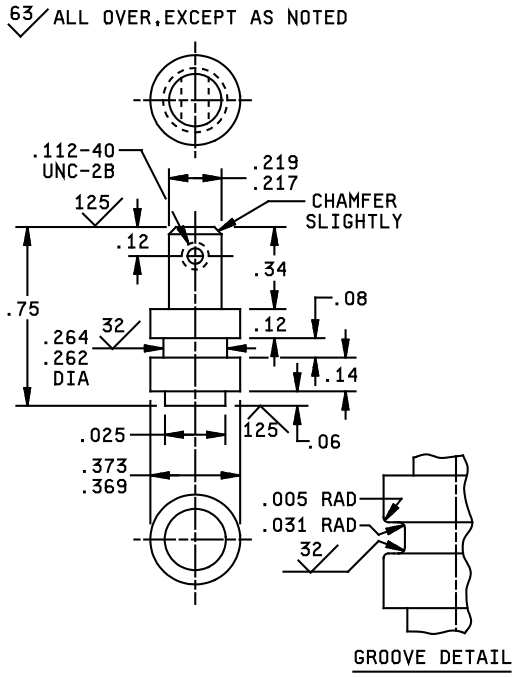


FIGURE 6. Shaft. 10

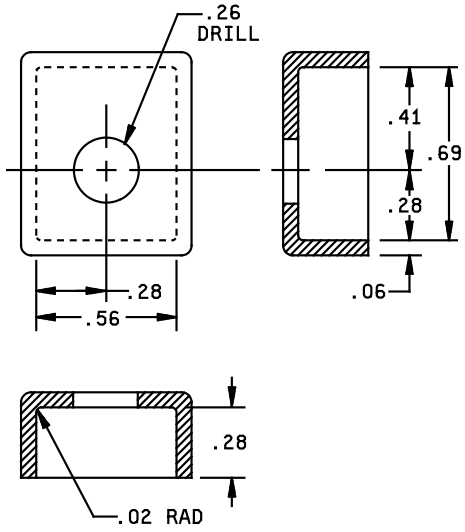


FIGURE 7. Coupler. 11

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:56Z
Check the source to verify that this is the current version before use.

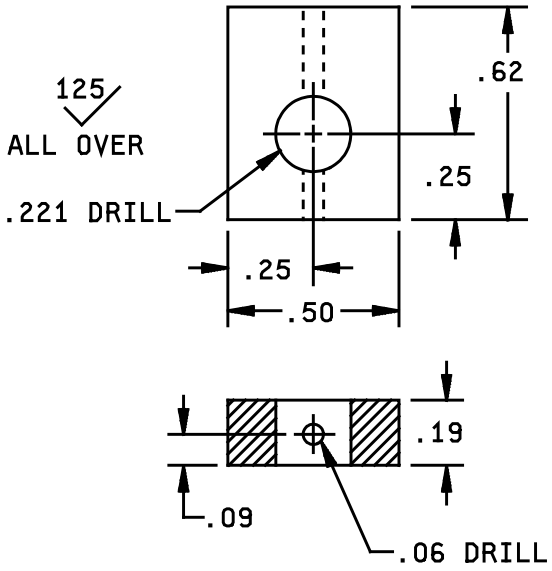


FIGURE 8. Coupler plate. (12)

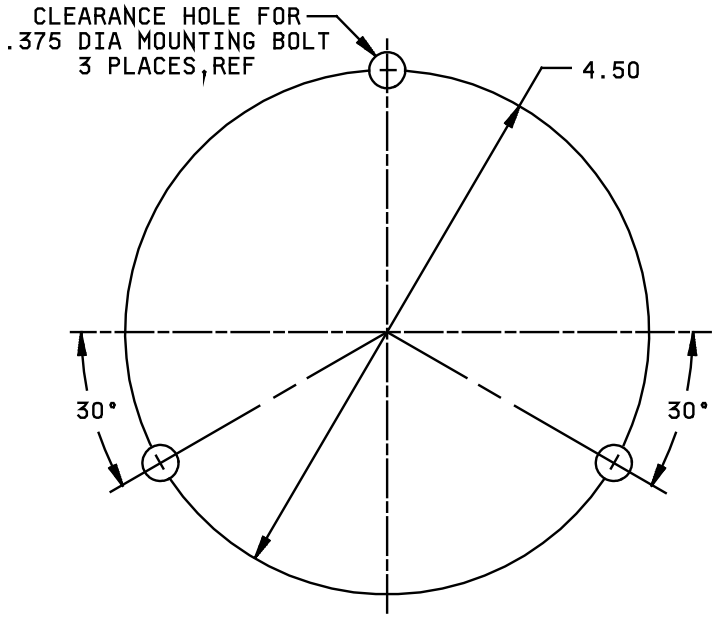


FIGURE 9. Mounting dimensions, ref

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:56Z
Check the source to verify that this is the current version before use.

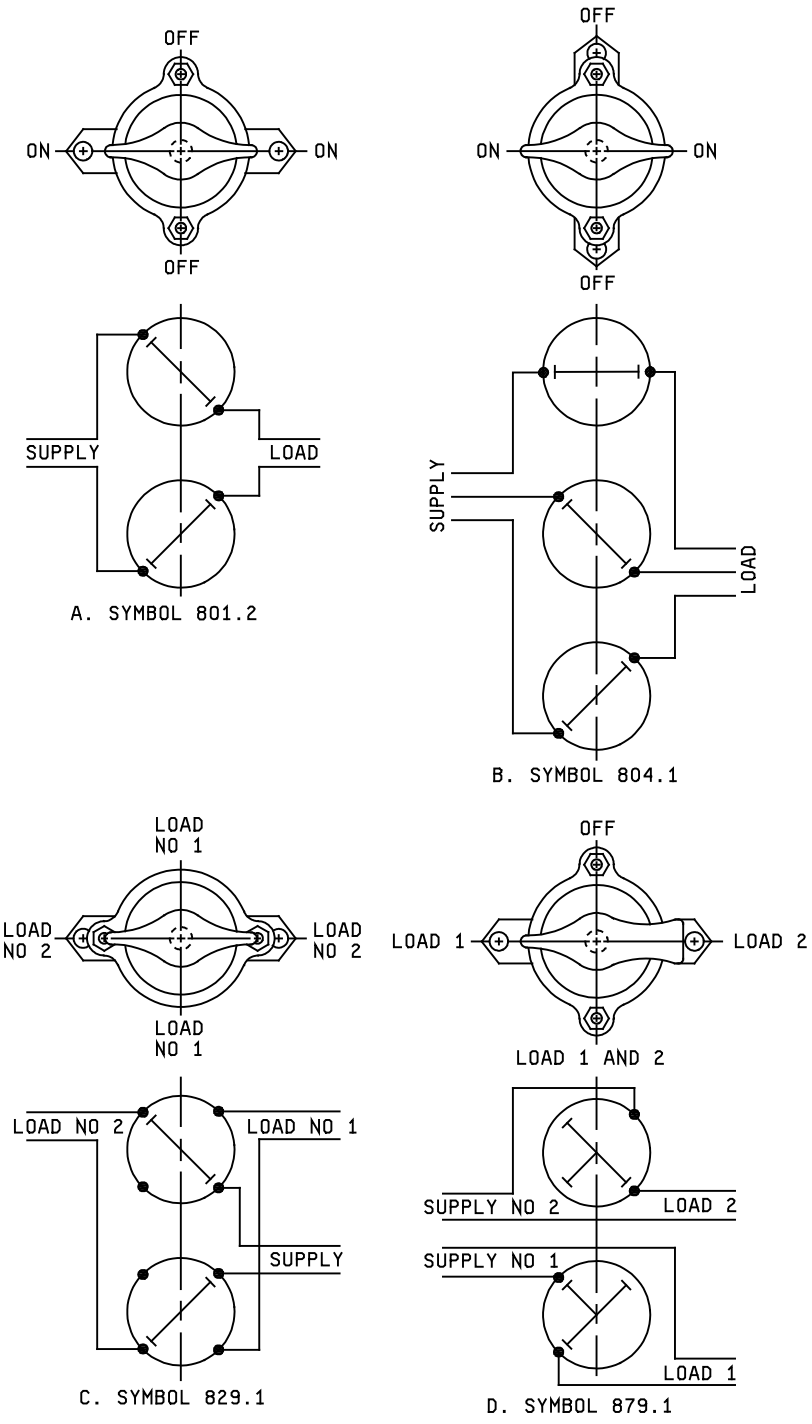


FIGURE 10. Wiring diagrams. (13) (14) (15) (16)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:56Z
Check the source to verify that this is the current version before use.

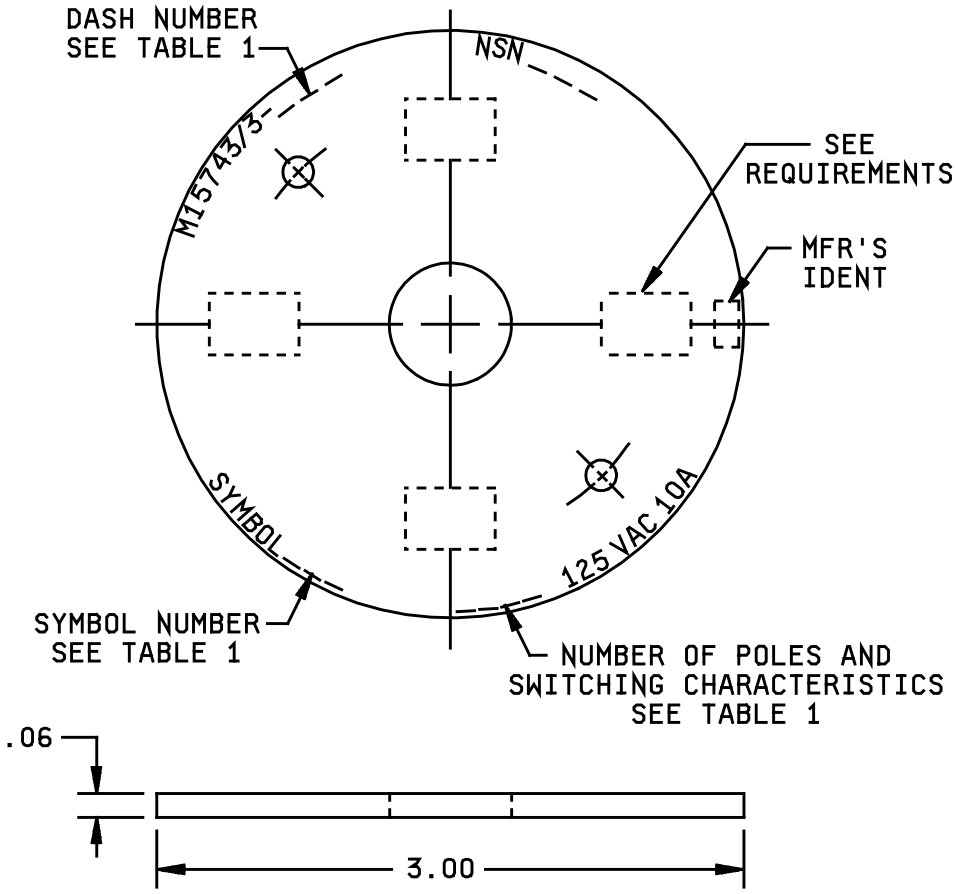


FIGURE 11. Identification plate. (21)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:56Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

SYMBOL NUMBER: See table I.

DESIGN:

Electrical rating: 125 V ac, 0-10 ampere, 60 Hz.
Dimensions and configuration: See figures 1 through 8.
Wiring diagram: See figure 10.
Mounting dimensions: See figure 9.
Degree of enclosure: Submersible (15 feet).
Weight:
(a) Symbols 801.2, 804.1, and 829.1, 2 pounds maximum.
(b) Symbol 879.1, 3 pounds maximum.
Designation and marking: See figure 11.
Identification data shall be as shown on figure 11. Unless otherwise specified in the ordering data, ON-OFF switch action marking shall be as shown on figure 10 and all others shall be left blank.
Parts: The parts shown in table II and as specified in MIL-DTL-15743 shall be used in the construction of the switches specified herein.

GENERAL INFORMATION:

Military part number and general information are as shown in table I.

TABLE I. Military part number and general information.

Military part no.	Symbol no.	No. of poles and switching characteristics	Supersedes 1/		
			Type	Unit	Sheet
M15743/3-001	801.1	DPST	1SR2A4-4	1	2
M15743/3-002	804.1	TPST	1SR3A4-2	4	5
M15743/3-003	829.1	DPDT	1SR2C4a-2	2	3
M15743/3-004	879.1	DPTT	1SR2F4-2	3	4

1/ NAVSEA Drawing 9000-S6202-74207, in part. Copies of this document are available from the applicable repositories listed in S0005-AE-PRO-010/EDM, which can be obtained online via Technical Data Management Information System (TDMIS) at https://mercury.tdmis.navy.mil/. Copies of this document may also be obtained from the Naval Ships Engineering Drawing Repository (NSEDR) online at https://199.208.213.105/webjedmics/index.jsp. To request an NSEDR account for drawing access, send an email to NNSY_JEDMICS_NSEDR_HELP_DESK@navy.mil.).

ORDERING DATA:
Acquisition documents should specify the following:
Switch action marking, if required (see requirements).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:56Z
Check the source to verify that this is the current version before use.

TABLE II. Parts list.

Item no. 1/	Description	Quantity M15743/3-				Material/ specification	Remarks
		001	002	003	004		
01	Switch, enclosed (sym 801.2)	-					See figure 1
02	Switch, enclosed (sym 804.1)		-				See figure 1
03	Switch, enclosed (sym 829.1)			-			See figure 1
04	Switch, enclosed (sym 879.1)				-		See figure 1
05	Enclosure	1	1	1	1	Brass, MIL-E-24142/5 (modified)	See figure 2 & 3 M24142/5-001
06	O-ring	1	1	1	1	SAE-AS28775-010 per SAE-AS28775	----
07	Handle	1	1	1		Copper alloy ASTM B584	See figure 4a
08	Handle				1	Copper alloy ASTM B584	See figure 4b
09	Shaft assembly	1	1	1	1	----	See figure 5
10	Shaft	1	1	1	1	Ni-Cu alloy of QQ-N-281	See figure 6
11	Coupler	1	1	1	1	Brass, ASTM B36/B36M, ASTM B121/B121M	See figure 7
12	Coupler plate	1	1	1	1	CRES, or equivalent	See figure 8
13	Wiring diagram	1				MIL-DTL-2036	See figure 10a
14	Wiring diagram		1			MIL-DTL-2036	See figure 10b
15	Wiring diagram			1		MIL-DTL-2036	See figure 10c
16	Wiring diagram				1	MIL-DTL-2036	See figure 10d
17	Switch (type 1SR2A4)	1				MIL-DTL-15291/3	M15291/3-002
18	Switch (type 1SR3A4)		1			MIL-DTL-15291/3	M15291/3-004
19	Switch (type 1SR2C4a)			1		MIL-DTL-15291/3	M15291/3-016
20	Switch (type 1SR2F4)				1	MIL-DTL-15291/3	M15291/3-021
21	Identification plate	1	1	1	1	ASTM B36/B36M, ASTM B121/B121M	See figure 11

1/ Numbers in circles shown on the figures are the same as the item numbers shown in this table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:56Z
Check the source to verify that this is the current version before use.

Referenced documents: In addition to MIL-DTL-15743, this document references the following:
MIL-DTL-15291/3
MIL-DTL-2036
MIL-E-24142/5
QQ-N-281
ASTM-B36/B36M
ASTM-B121/B121M
ASTM-B584
SAE-AS28775
NAVSEA DWG 9000-S6202-74207

The margins of this specification are marked with vertical lines to indicate where modifications from this revision were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Custodian:
Navy - SH
DLA - CC

Preparing activity:
DLA - CC

(Project 5930-2026-037)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil/

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:56Z
Check the source to verify that this is the current version before use.