INCH-POUND
MIL-DTL-15743/4E
6 November 2023
SUPERSEDING
MIL-DTL-15743/4D
27 August 2018

DETAIL SPECIFICATION SHEET

SWITCHES, ROTARY, ENCLOSED, SUBMERSIBLE (15 FEET), SNAP ACTION, 125 VOLTS ALTERNATING CURRENT, 10 AMPERE, SYMBOLS 805.1 (4PST), 857 (TPDT)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification and MIL-DTL-15743.

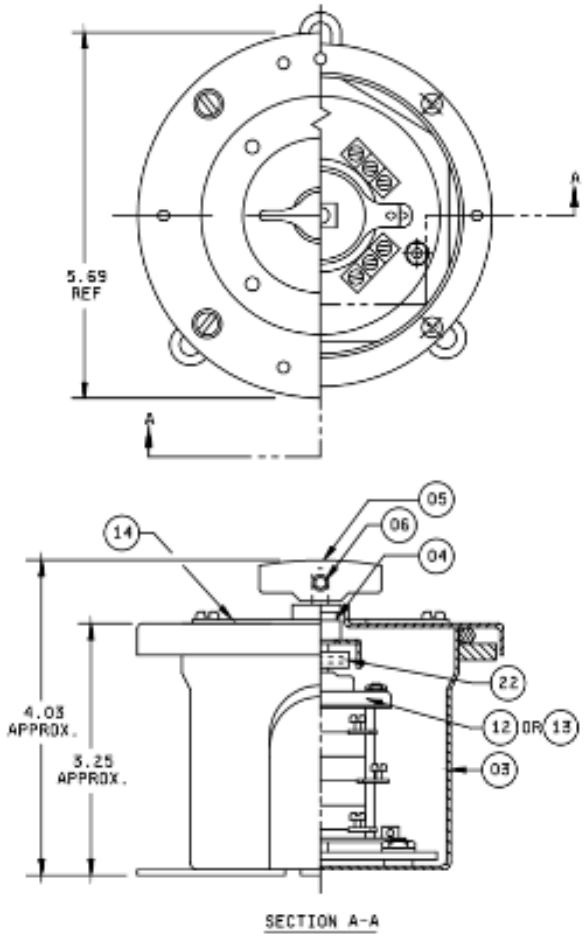


FIGURE 1. Switch, enclosed. (01,) (02) (-002 shown)

NOTES:
1. All dimensions in inches.
2. Unless otherwise specified herein, tolerances shall be as follows:
   Two place decimals - plus or minus 0.02.
   Three place decimals - plus or minus 0.005.
   Angular dimensions – plus or minus 30 minutes.

DISTRIBUTION STATEMENT A. Approved for public release. Distribution is unlimited.
Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:56Z
Check the source to verify that this is the current version before use.

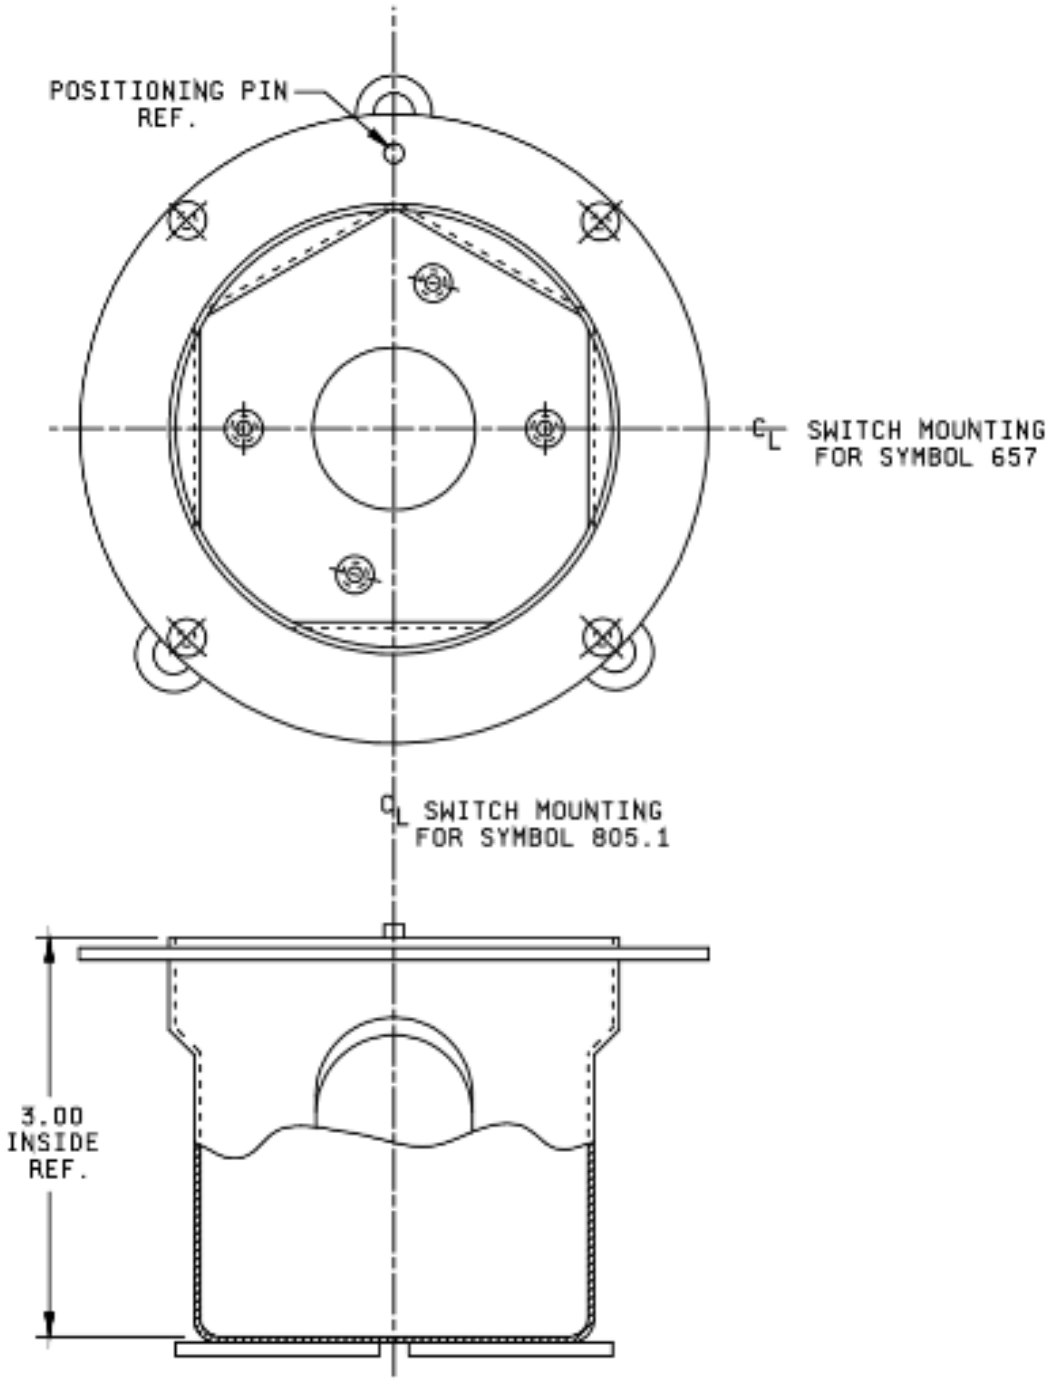


FIGURE 2. Box assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:56Z
Check the source to verify that this is the current version before use.

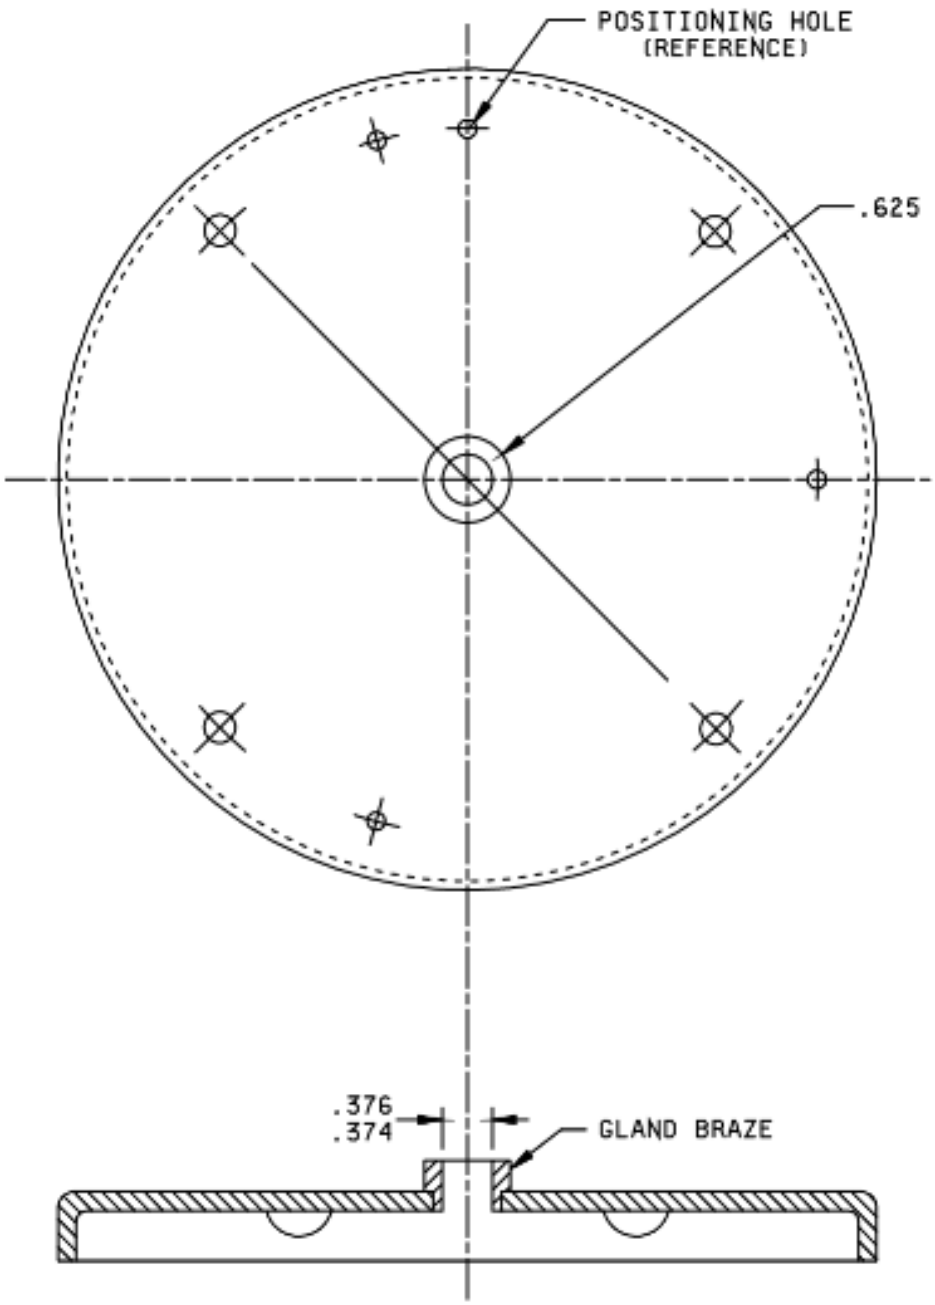


FIGURE 3. Cover assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:56Z
Check the source to verify that this is the current version before use.

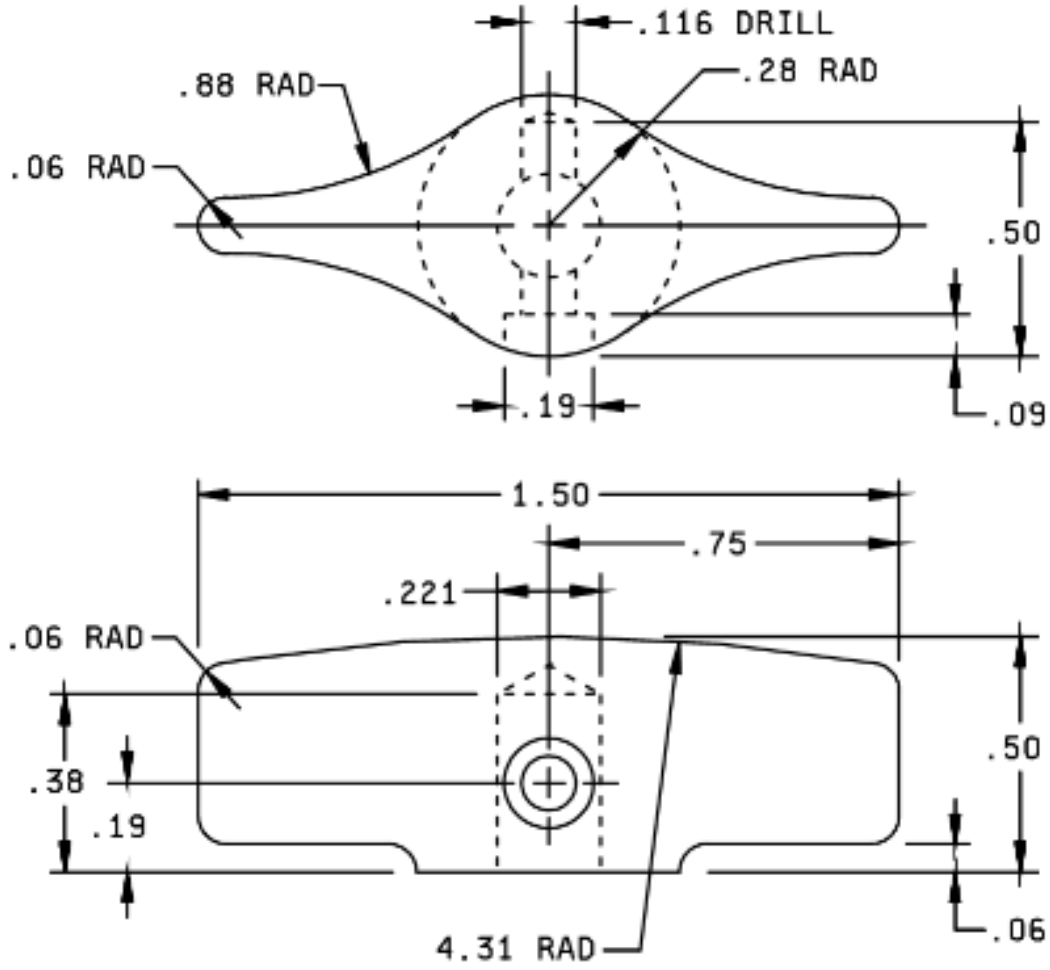


FIGURE 4. Handle. (05)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:56Z
Check the source to verify that this is the current version before use.


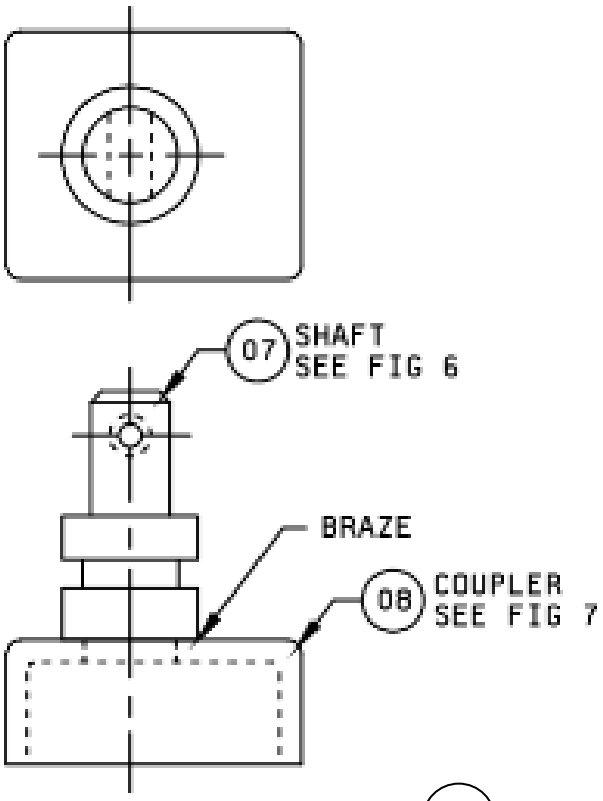


FIGURE 5. Shaft assembly. 06

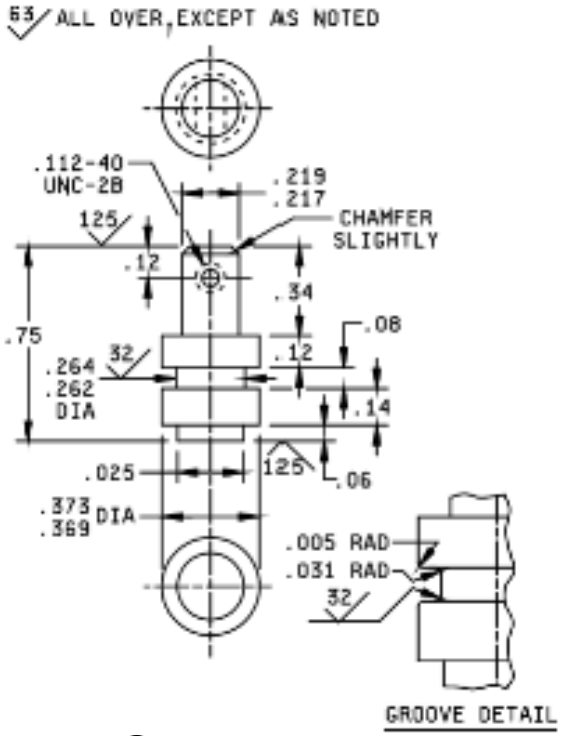

7. Coupler. 08

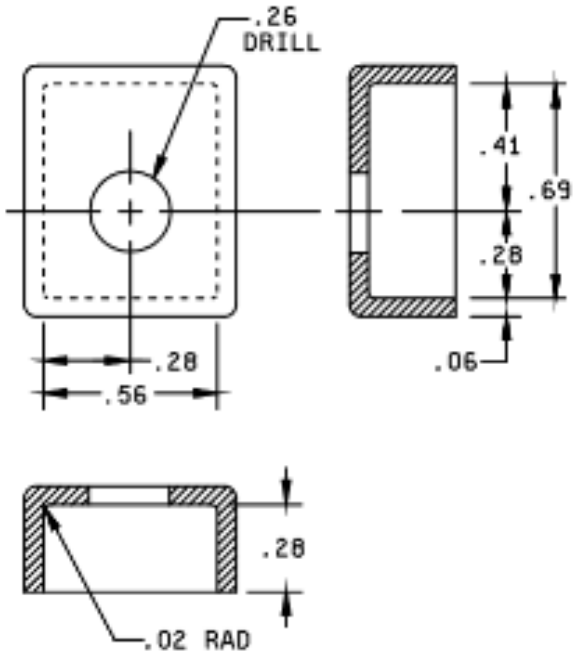


FIGURE 6. Shaft. 07 FIGURE

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:56Z
Check the source to verify that this is the current version before use.

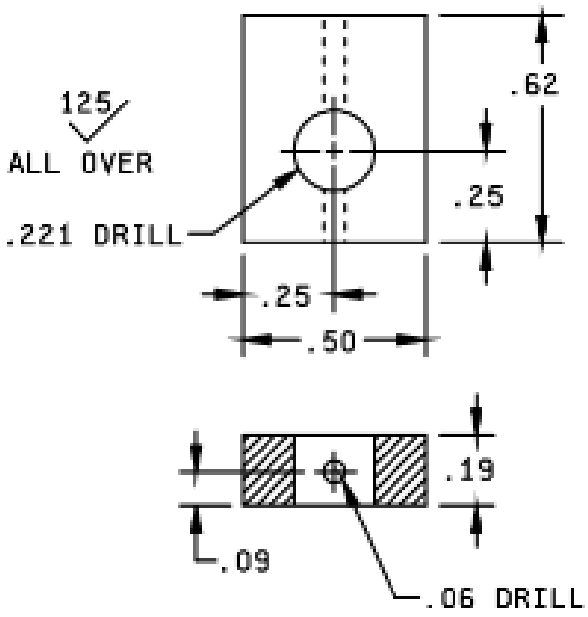


FIGURE 8. Coupler plate. 09

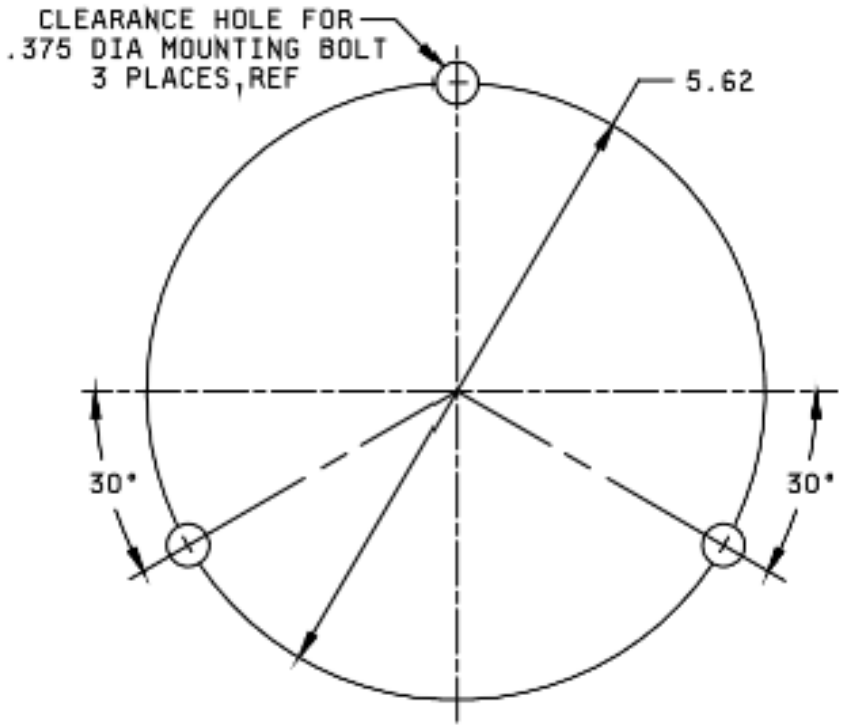


FIGURE 9. Mounting dimensions, ref.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:56Z
Check the source to verify that this is the current version before use.

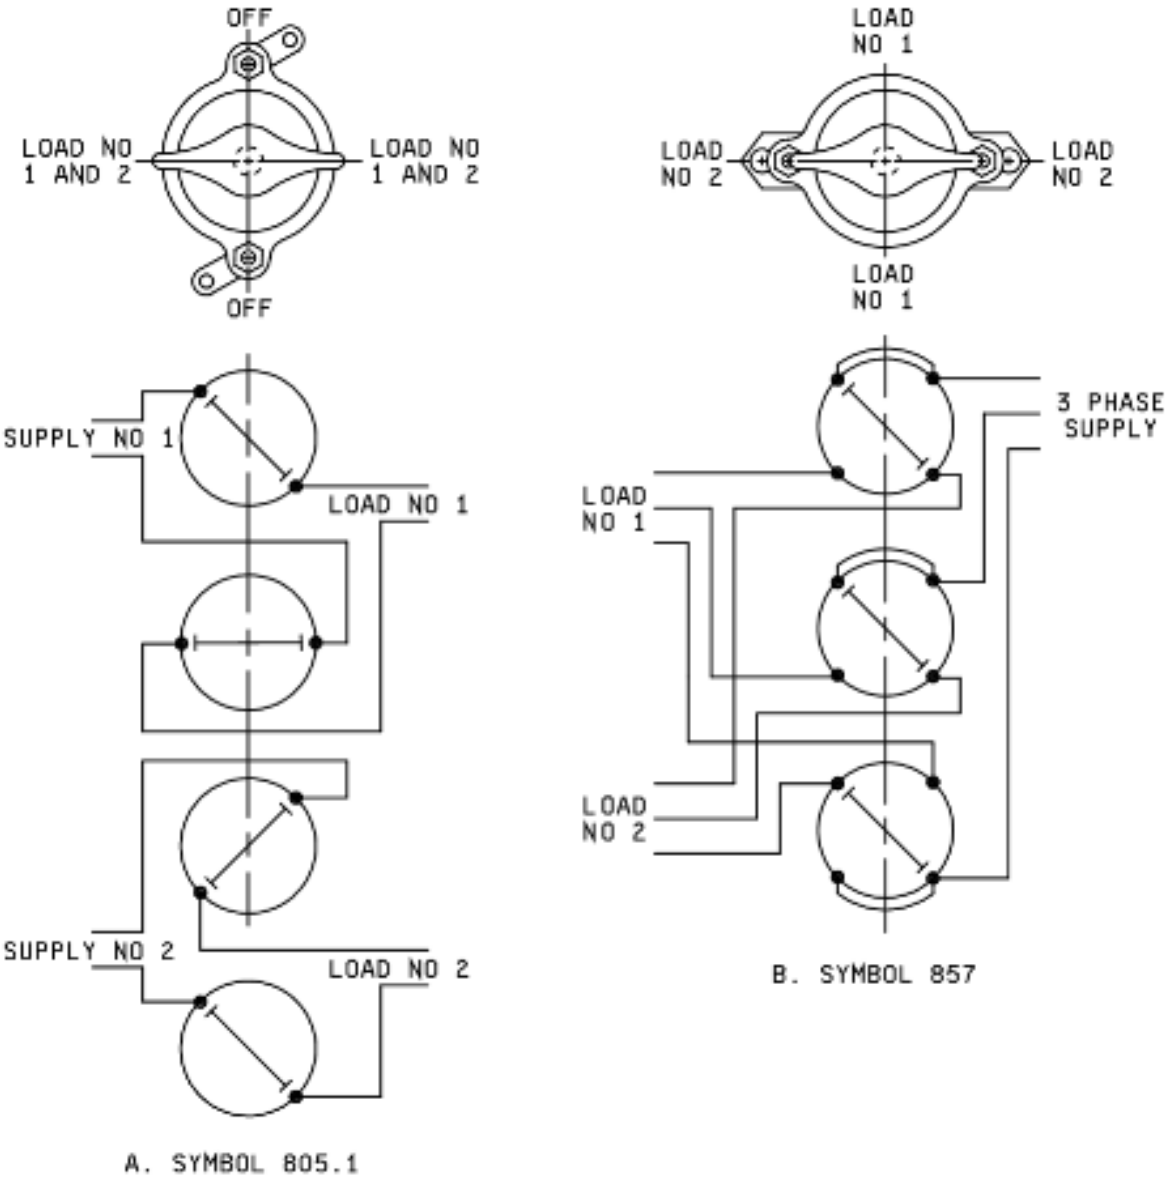


FIGURE 10. Wiring diagrams. 10, 11

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:56Z
Check the source to verify that this is the current version before use.

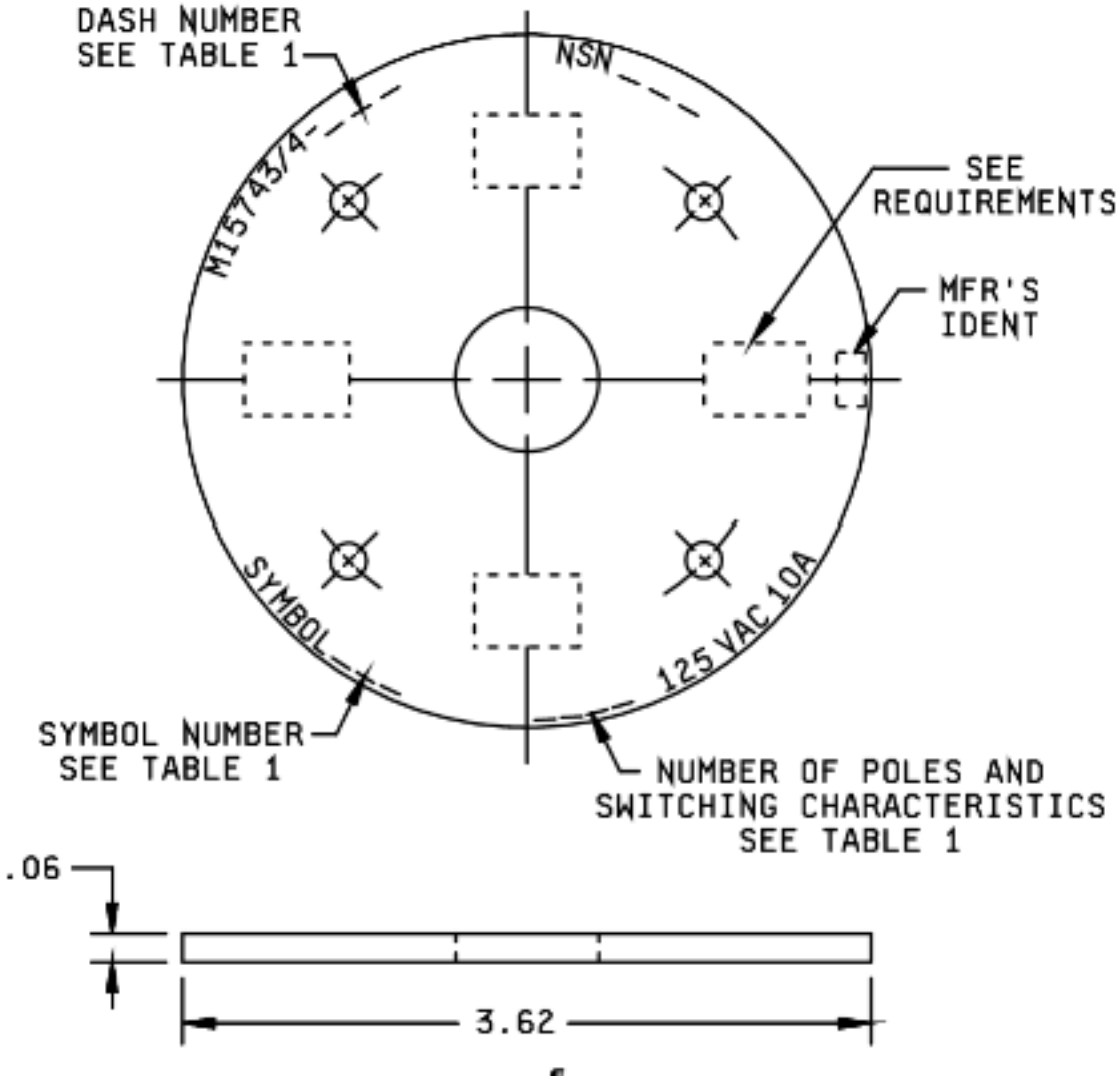


FIGURE 11. Identification plate. 14

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:56Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

SYMBOL NUMBER: See table I.

DESIGN:

Electrical rating: 125 V ac, 0-10 ampere, 60 Hz.
Dimensions and configuration: See figures 1 through 8.
Wiring diagram: See figure 10.
Mounting dimensions: See figure 9.
Degree of enclosure: submersible (15 feet).
Weight: 2 pounds maximum.
Designation and marking: See figure 11.
Identification data shall be as shown on figure 11. Unless otherwise specified in the ordering data, ON-OFF switch action marking shall be as shown on figure 10 and all others shall be left blank.
Parts: The parts shown in table II and as specified in MIL-DTL-15743 shall be used in the construction of the switches specified herein.

GENERAL INFORMATION:

Military part number and general information are as shown in table I.

TABLE I. Military part numbers and general information.

Military part no.	Symbol no.	No. of poles and switching characteristics	Supersedes 1/		
			Type	Unit	Sheet
M15743/4-001	805.1	4PST	1SR4A4-2	7	8
M15743/4-002	857	TPDT	1SR3C4-2	6	7

1/ NAVSEA Drawing 9000-S6202-74207, in part.

ORDERING DATA:
Acquisition documents should specify the following:
Switch action marking, if required (see requirements).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:56Z
Check the source to verify that this is the current version before use.

TABLE II. Parts list.

Item no. 1/	Description	Quantity M15743/4- 001	Quantity M15743/4- 002	Material / specification	Remarks
01	Switch, enclosed (sym 805.1)	-			See figure 1
02	Switch, enclosed (sym 857)		-		See figure 1
03	Enclosure	1	1	Brass, MIL-E-24142/5 (modified)	See figure 2 & 3 M24142/5-002
04	O-ring	1	1	SAE-AS28775-010 2/	----
05	Handle	1	1	Copper alloy ASTM-B-584	See figure 4
06	Shaft assembly	1	1	----	See figure 5
07	Shaft	1	1	Ni-Cu alloy of QQ-N-281, Stainless Steel, or Brass	See figure 6
08	Coupler	1	1	Brass, ASTM-B36/B36M ASTM-B121/B121M	See figure 7
09	Coupler plate	1	1	CRES, or equivalent	See figure 8
10	Wiring diagram	1		MIL-DTL-2036	See figure 10a
11	Wiring diagram		1	MIL-DTL-2036	See figure 10b
12	Switch (type 1SR4A4)	1		MIL-DTL-15291/3	M15291/3-006
13	Switch (type 1SR3C4)		1	MIL-DTL-15291/3	M15291/3-007
14	Identification plate	1	1	ASTM-B36/B36M, ASTM-B121/B121M	See figure 11

1/ Numbers in circles shown on the figures are the same as the item numbers shown in this table.
2/ SAE-AS28775-010 details are found in SAE-AS28775.

Referenced documents. In addition to MIL-DTL-15743, this document references the following:

MIL-DTL-2036
MIL-DTL-15291/3
MIL-E-24142/5
QQ-N-281
ASTM-B36/B36M
ASTM-B121/B121M
ASTM-B584
SAE-AS28775
NAVSEA DWG 9000-S6202-74207

Changes from previous issue. The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the previous issue.

Custodian:
Navy – SH
DLA - CC

Preparing activity:
DLA - CC

(Project 5930-2023-045)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil/ .

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:56Z
Check the source to verify that this is the current version before use.