
MILITARY SPECIFICATION SHEET

SWITCHES, ROTARY, ENCLOSED, SUBMERSIBLE (15 FEET), SNAP ACTION, 125 VOLTS ALTERNATING CURRENT, 10 AMPERE, SYMBOLS 827.1 (SPECIAL), 850.1 (TPDT), AND 863 (4PDT)

This specification sheet is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the switches described herein shall consist of this specification and the latest issue of MIL-S-15743(SH).

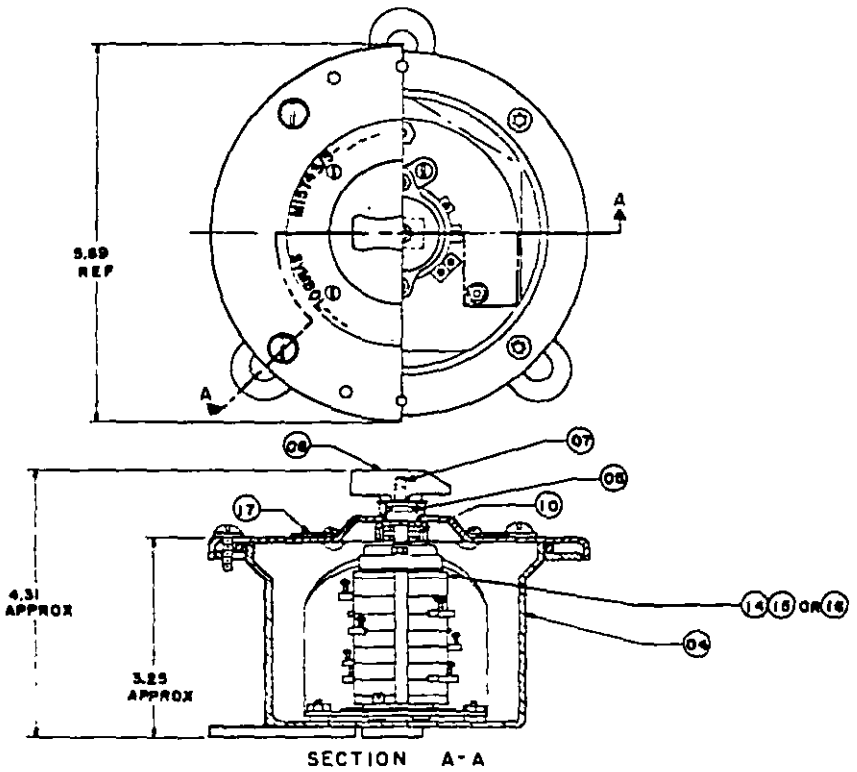

SH 131169

FIGURE 1. Switch, enclosed. (01) (02) (03)
(-002 shown)

NOTES:
1. All dimensions in inches.
2. Unless otherwise specified herein, tolerances shall be as follows:
   Two place decimals - plus or minus 0.02.
   Three place decimals - plus or minus 0.005.
   Angular dimensions - plus or minus 30 minutes.

FSC 5930

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:57Z
Check the source to verify that this is the current version before use.


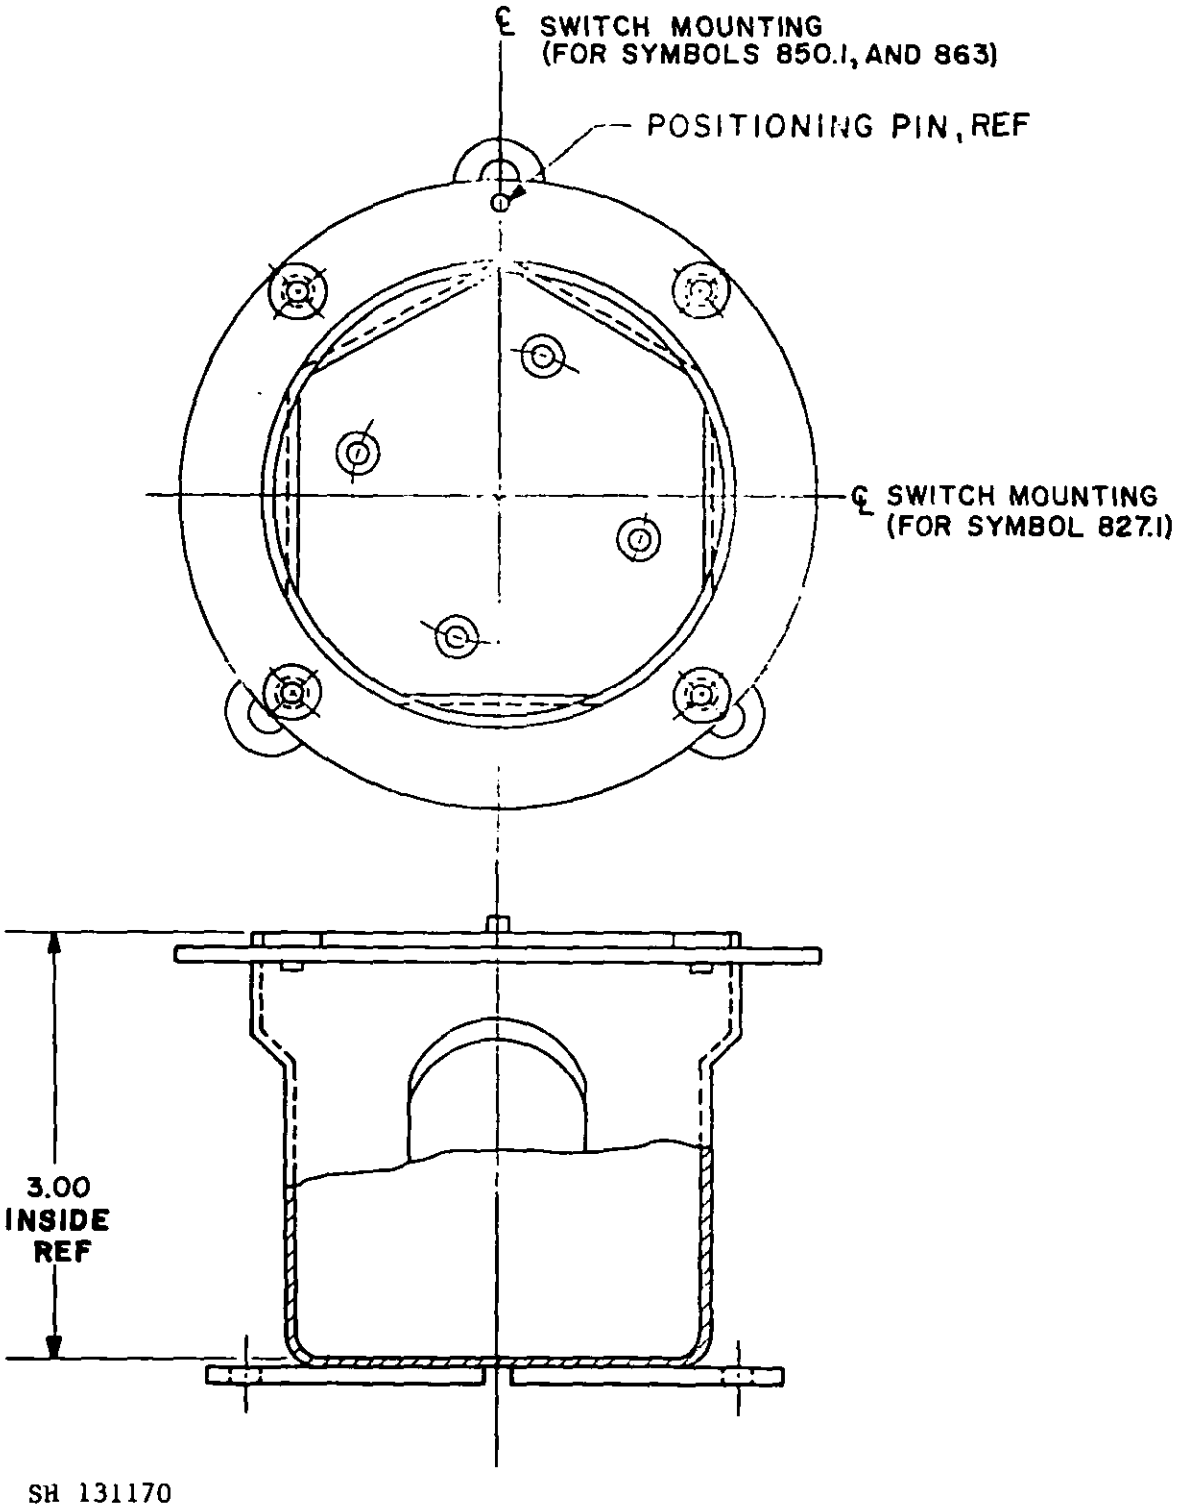


FIGURE 2. Box assembly.


Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:57Z
Check the source to verify that this is the current version before use.

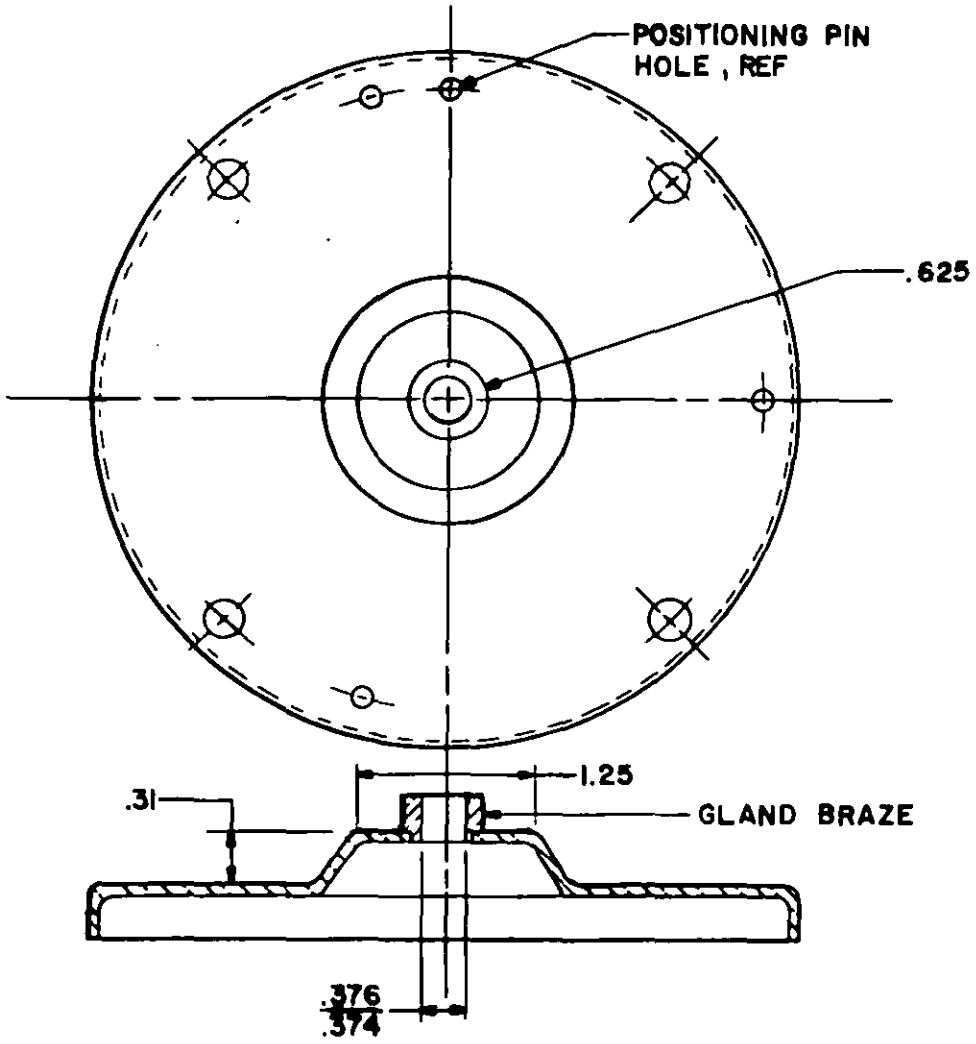

SH 131171

FIGURE 3. Cover assembly (modified).


Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:57Z
Check the source to verify that this is the current version before use.

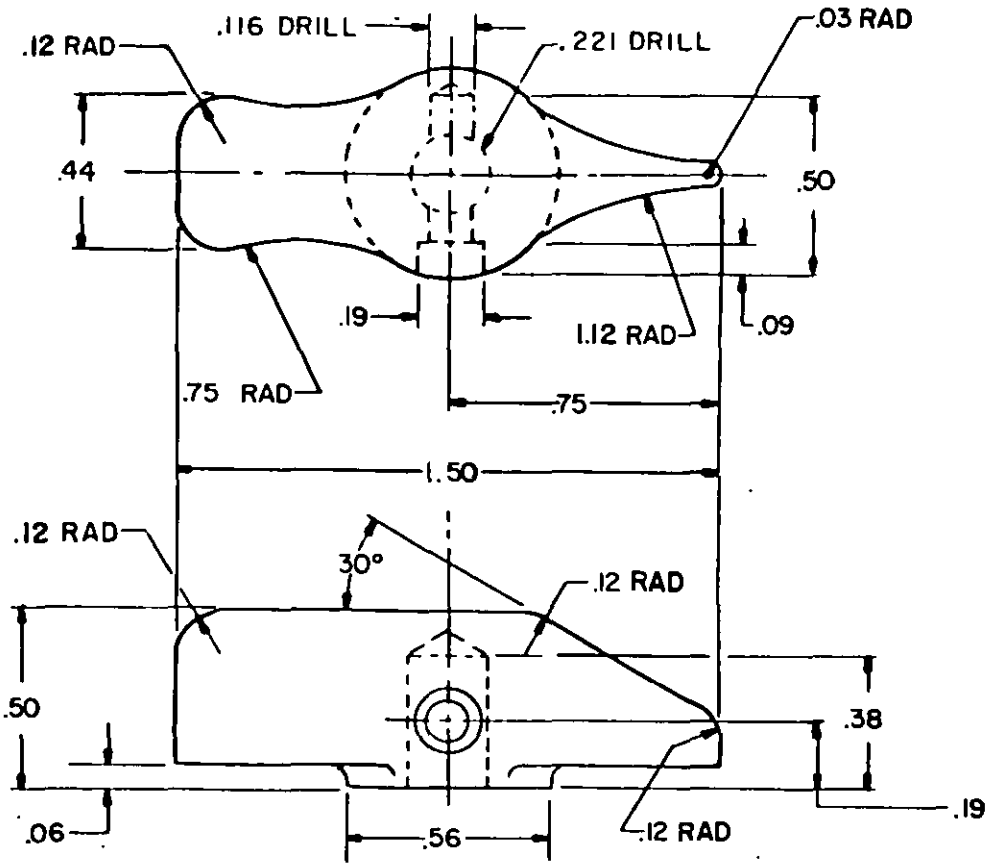

SH 131172


FIGURE 4. Handle. (06)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:57Z
Check the source to verify that this is the current version before use.

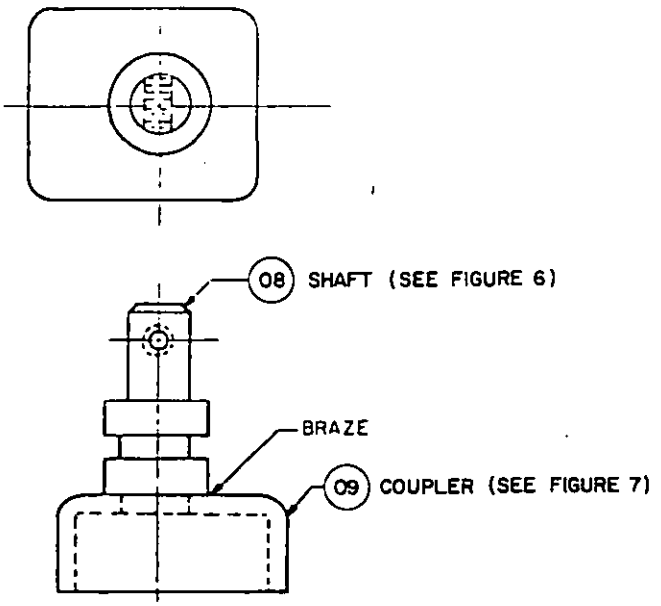


SH 131173

FIGURE 5. Shaft assembly. (07)

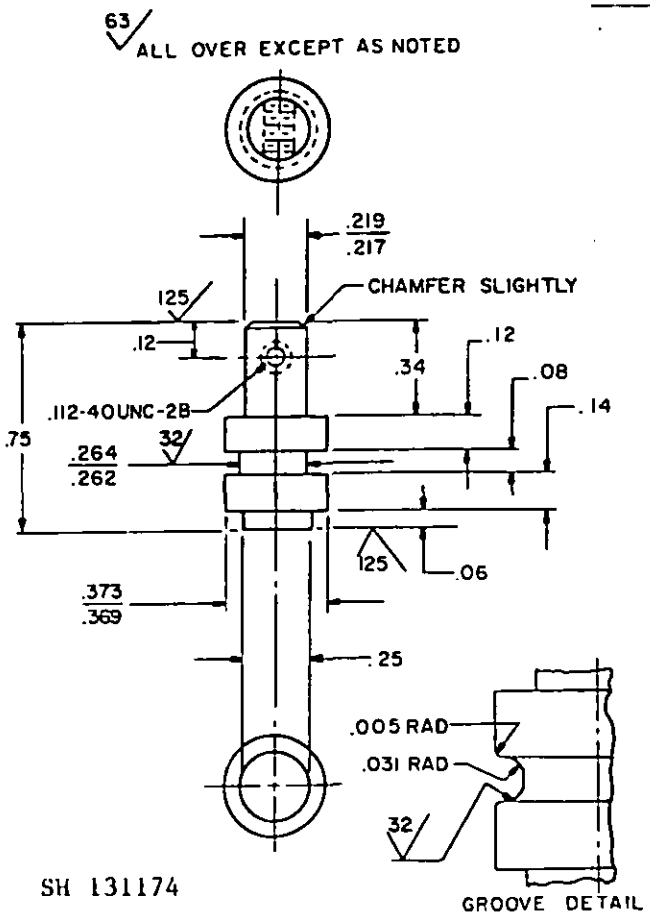

SH 131174


FIGURE 6. Shaft. (08)

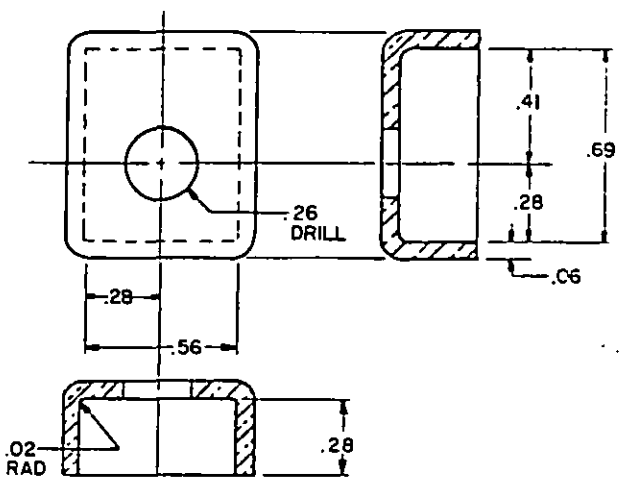

SH 131175


FIGURE 7. Coupler. (09)

Source: https://assist.dla.mil -- Downloaded: 202610-18T07:57Z
Check the source to verify that this is the current version before use.

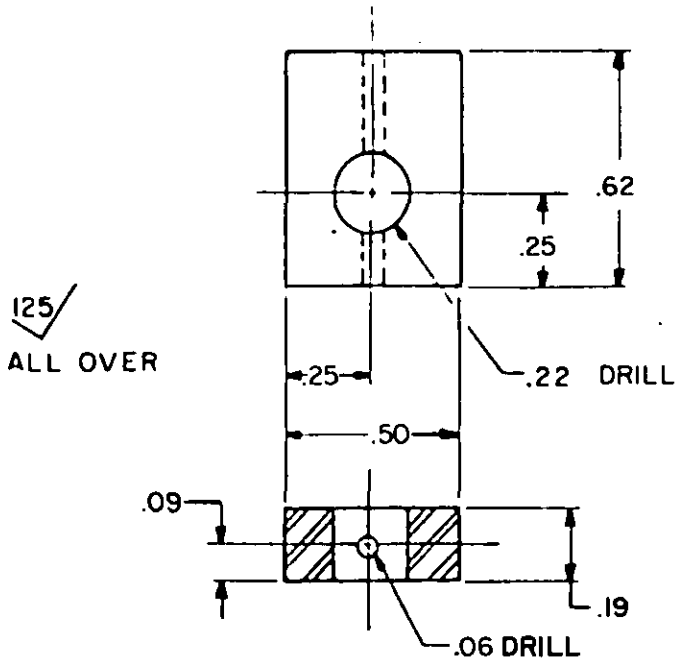

SH 131176

FIGURE 8. Coupler plate. (10)

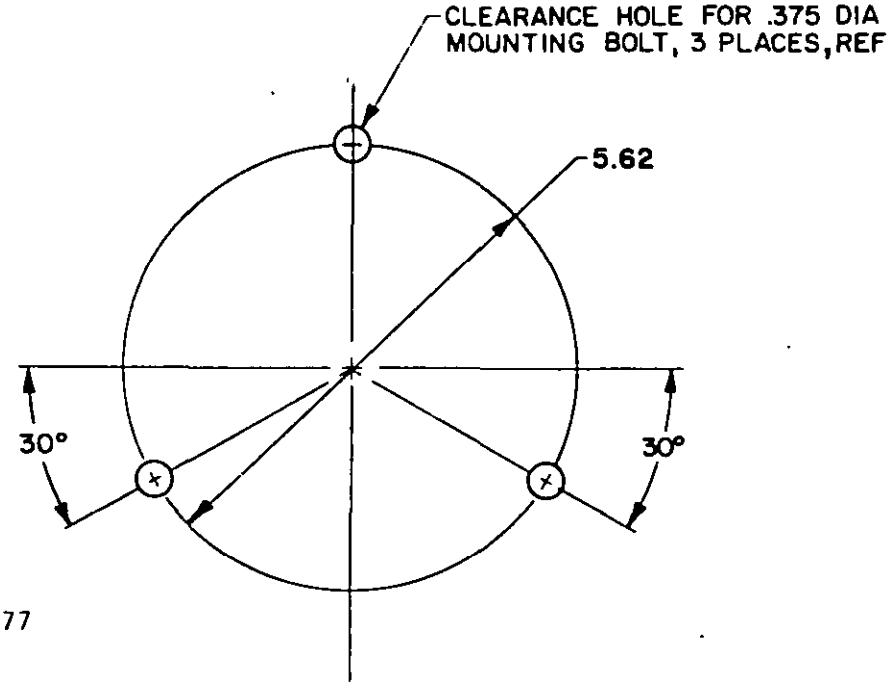

SH 131177

FIGURE 9. Mounting dimensions, ref.

Source: https://assist.dla.mil -- Downloaded: 202610-18T07:57Z
Check the source to verify that this is the current version before use.


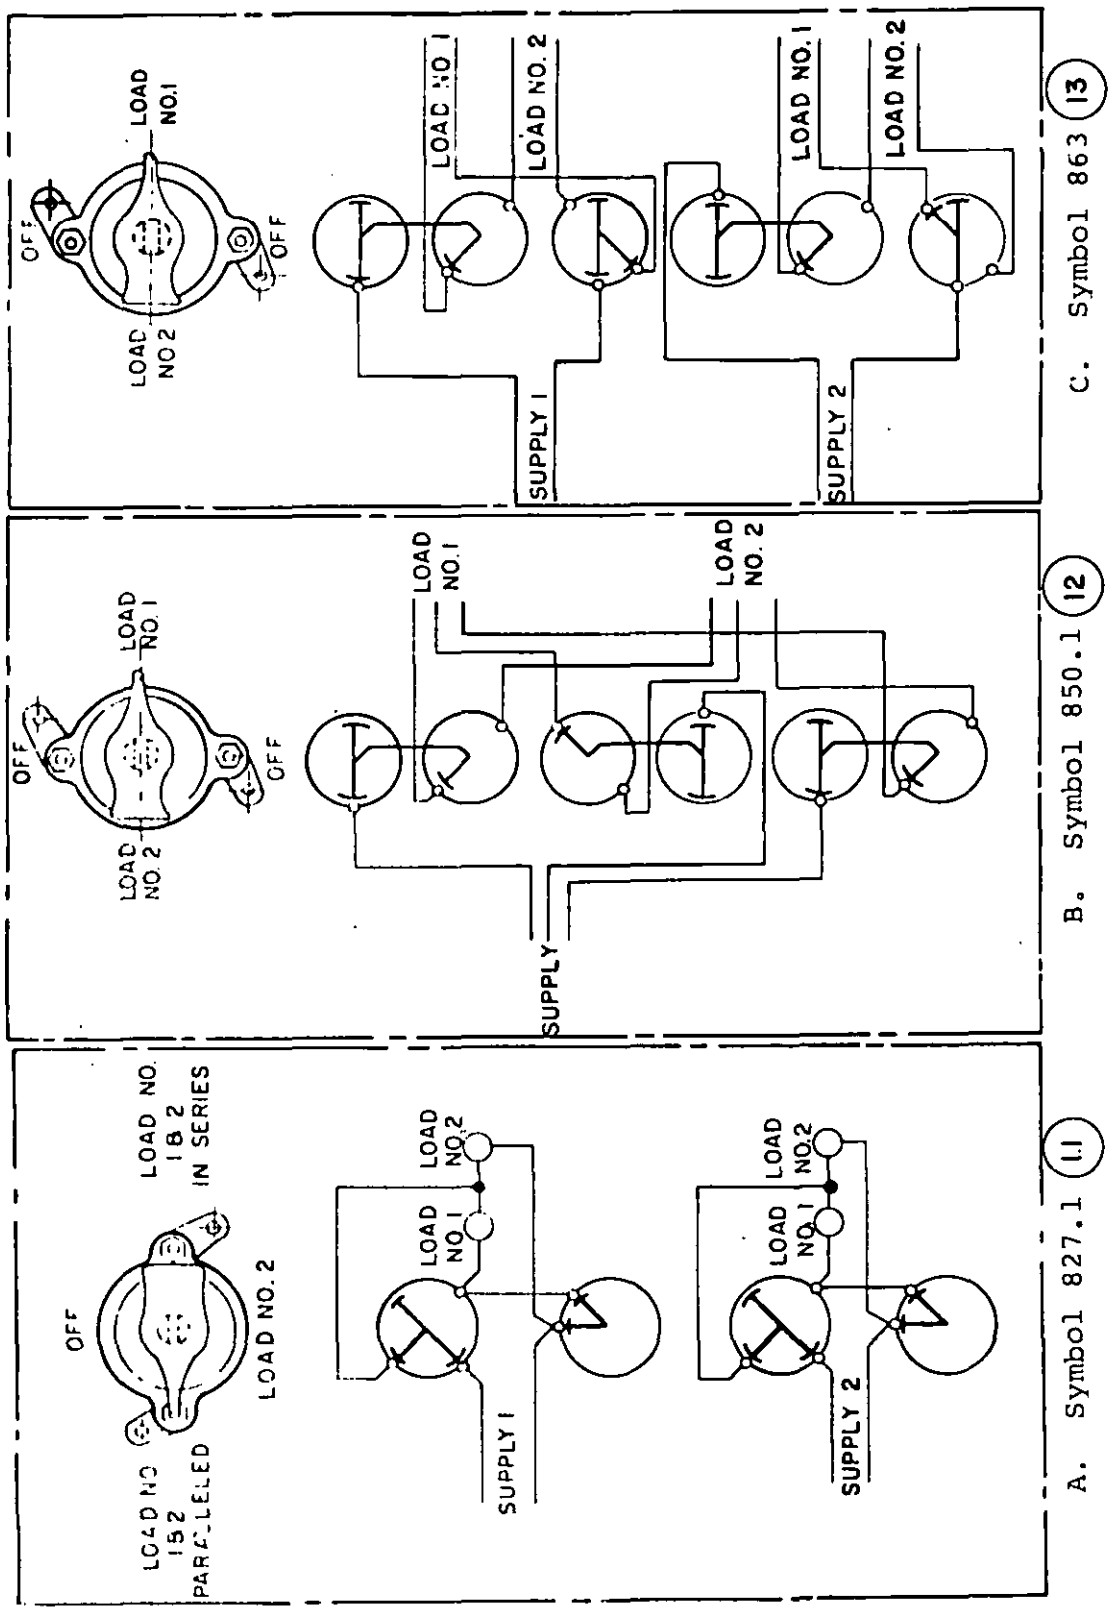


FIGURE 10. Wiring diagrams.

SH 131178

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:57Z
Check the source to verify that this is the current version before use.

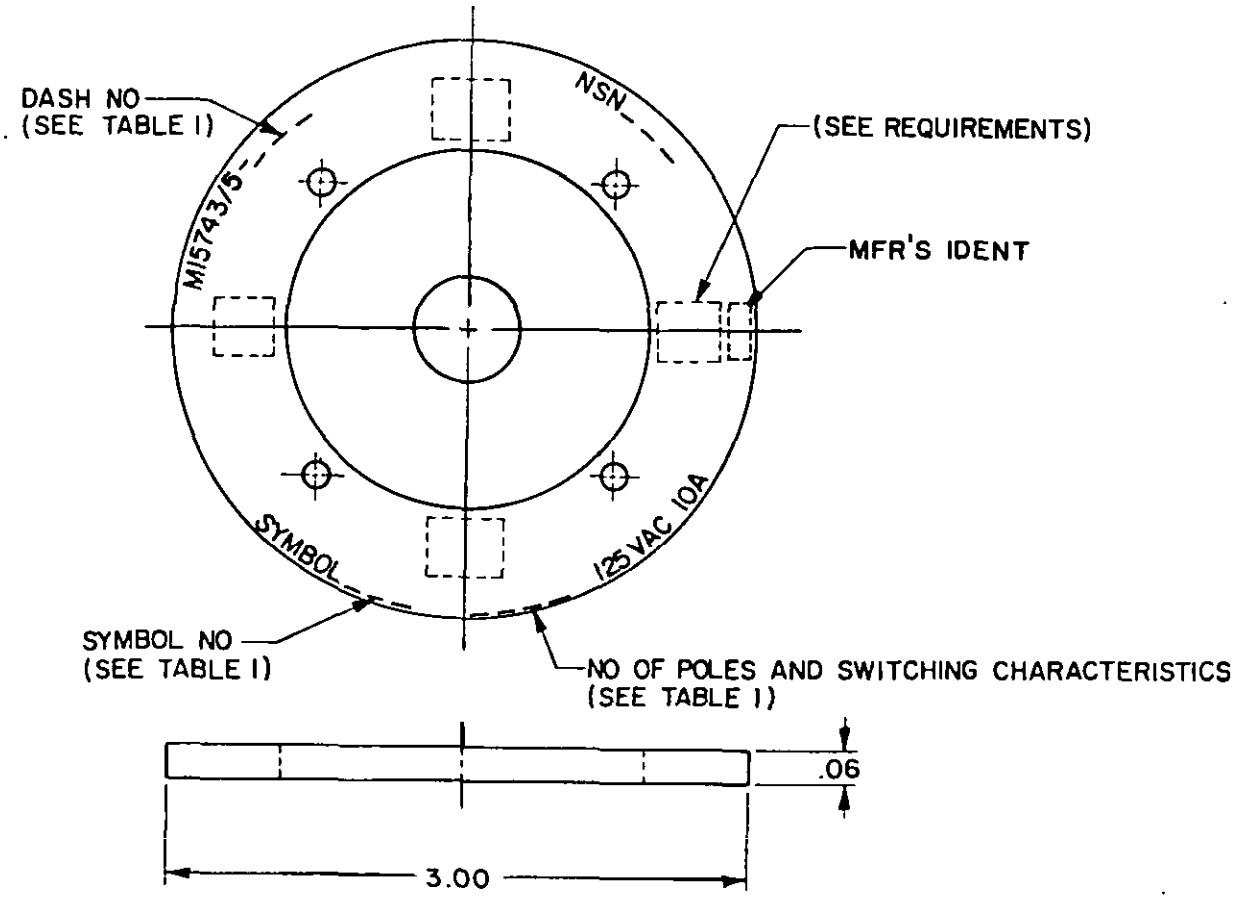

SH 131179

FIGURE 11. Identification plate. (17)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:57Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

SYMBOL NUMBER: See table I.

DESIGN:

Electrical rating: 125 Va.c., 0-10 ampere, 60 Hz.
Dimensions and configuration: See figures 1 through 8.
Wiring diagram: See figure 10.
Mounting dimensions: See figure 9.
Degree of enclosure: Submersible (15 feet).
Weight:
(a) Symbols 827.1 and 850.1 2 pounds maximum.
(b) Symbol 863 3 pounds maximum.
Designation and marking: See figure 10.
Identification data shall be as shown on figure 10. Unless otherwise specified in the ordering data, ON-OFF switch action marking shall be as shown on figure 10 and all others shall be left blank.
Parts: The parts shown in table II and as specified in MIL-S-15743 shall be used in the construction of the switches specified herein.

GENERAL INFORMATION:

Military part numbers and general information are as shown in table I.

TABLE I. Military part numbers and general information.

Military part no.	Symbol no.	No. of poles and switching characteristics	Supersedes 1/				
			Type	Unit	Sheet	Revision	Date
M15743/5-001	827.1	SPECIAL	1SRSS4-2	8	9	D	10/28/57
M15743/5-002	850.1	TPDT	1SR3B4-2	5	6	D	10/28/57
M15743/5-003	863	4PDT	1SR4B4-2	12	13	G	6/30/79

1/ NAVSEA Drawing 9000-S6202-74207, in part.

ORDERING DATA:

Acquisition documents should specify the following:
Switch action marking, if required (see requirements).

TABLE II. Parts list.

Item no. 1/	Description	Quantity M15743/5-			Material/specification	Remarks
		001	002	003		
01	Switch, enclosed (sym 827.1)	-				See figure 1
02	Switch, enclosed (sym 850.1)		-			See figure 1
03	Switch, enclosed (sym 863)			-		See figure 1
04	Enclosure	1	1	1	Brass, MIL-E-24142/5	M24142/5-002 2/

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 202610-18T07:57Z
Check the source to verify that this is the current version before use.

TABLE II. Parts list. - Continued

Item no. 1/	Description	Quantity M15743/5- 001	002	003	Material/specification	Remarks
05	O-ring	1	1	1	MS28775-010	----
06	Handle	1	1	1	Copper alloy 854 of QQ-C-390	See figure 4
07	Shaft assembly	1	1	1	-----	See figure 5
08	Shaft	1	1	1	Ni-Cu alloy of QQ-N-281	See figure 6
09	Coupler	1	1	1	Brass, alloy 260 of QQ-B-613	See figure 7
10	Coupler plate	1	1	1	CRES, class 304 or 316 of QQ-S-766	See figure 8
11	Wiring diagram	1			MIL-E-2036	See figure 10
12	Wiring diagram		1		MIL-E-2036	See figure 10
13	Wiring diagram			1	MIL-E-2036	See figure 10
14	Switch (type 1SRSS4)	1			Drawing 9000-S6202-74085	
15	Switch (type 1SR3B4)		1		MIL-S-15291/3	M15291/3-011
16	Switch (type 1SR4B4)			1	MIL-S-15291/3	M15291/3-012
17	Identification plate	1	1	1	Brass, QQ-B-613	See figure 11

1/ Numbers in circles shown on the figures are the same as the item numbers shown in this table.
2/ Modified enclosure cover, (see figure 3).

Preparing activity:
Navy - SH
(Project 5930-N584-5)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:57Z
Check the source to verify that this is the current version before use.