INCH-POUND
MIL-S-15743/5A(SH)
22 November 1993
SUPERSEDING
MIL-S-15743/5(SH)
27 August 1984

MILITARY SPECIFICATION SHEET

SWITCHES, ROTARY, ENCLOSED, SUBMERSIBLE (15 FEET), SNAP ACTION, 125 VOLTS ALTERNATING CURRENT, 10 AMPERE, SYMBOLS 827.1 (SPECIAL), 850.1 (TPDT), AND 863 (4PDT)

This specification sheet is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-S-15743.

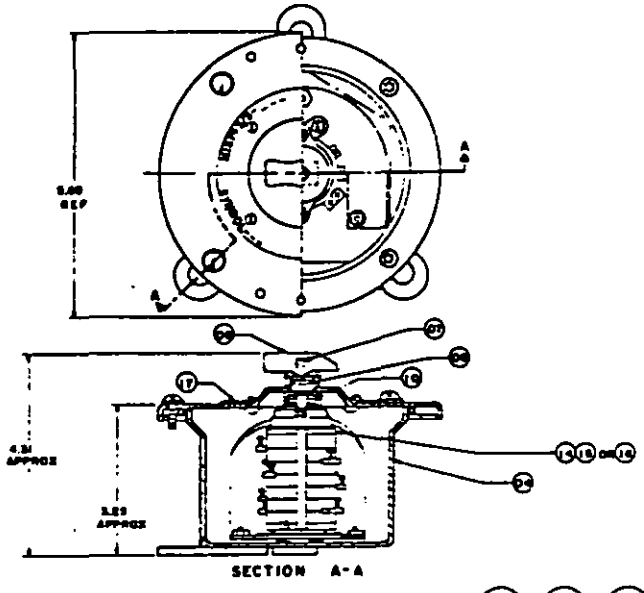


FIGURE 1. Switch, enclosed. (01) (02) (03)
(-002 shown)

NOTES:
1. All dimensions in inches.
2. Unless otherwise specified herein, tolerances shall be as follows:
   Two place decimals - plus or minus 0.02.
   Three place decimals - plus or minus 0.005.
   Angular dimensions - plus or minus 30 minutes.

AMSC N/A FSC 5930

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:57Z
Check the source to verify that this is the current version before use.

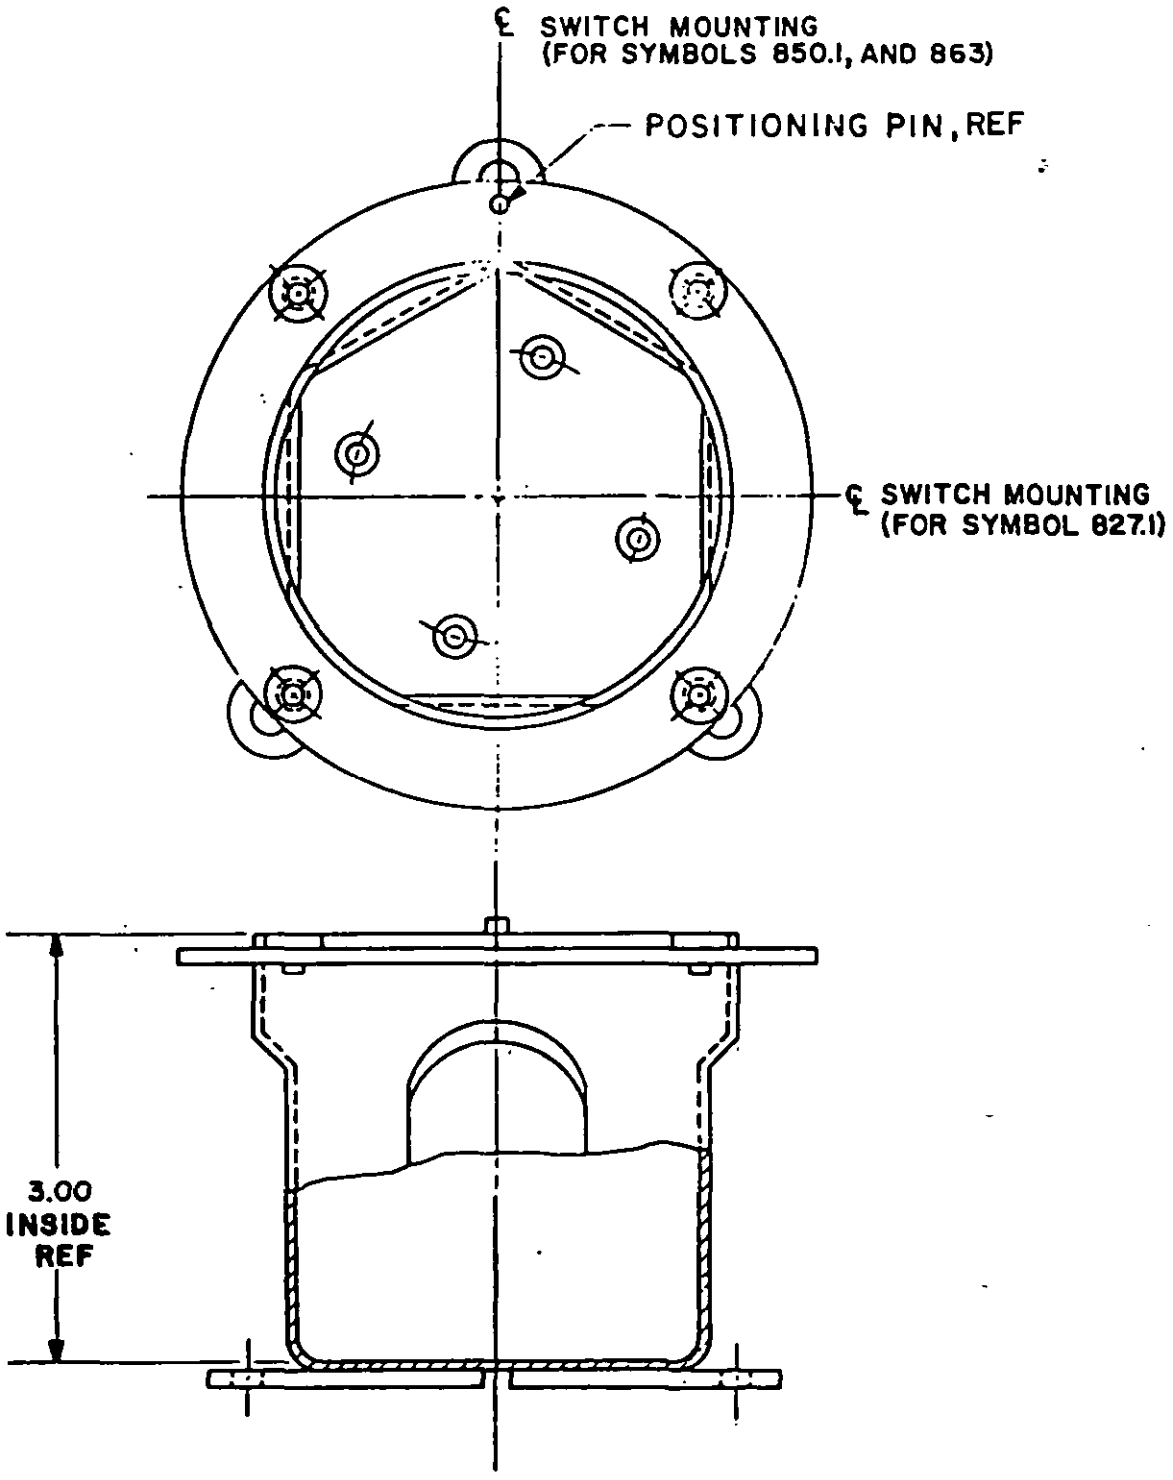


FIGURE 2. Box assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:57Z
Check the source to verify that this is the current version before use.

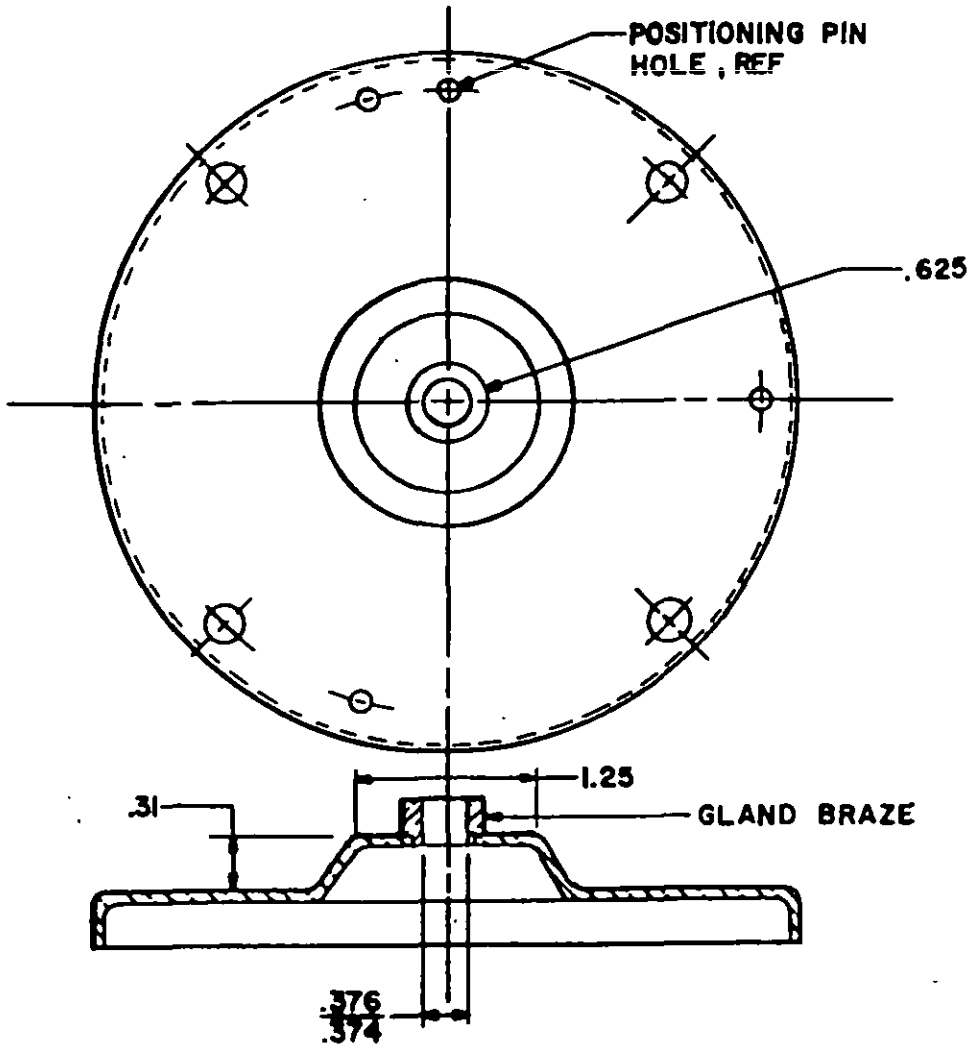


FIGURE 3. Cover assembly (modified).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:57Z
Check the source to verify that this is the current version before use.

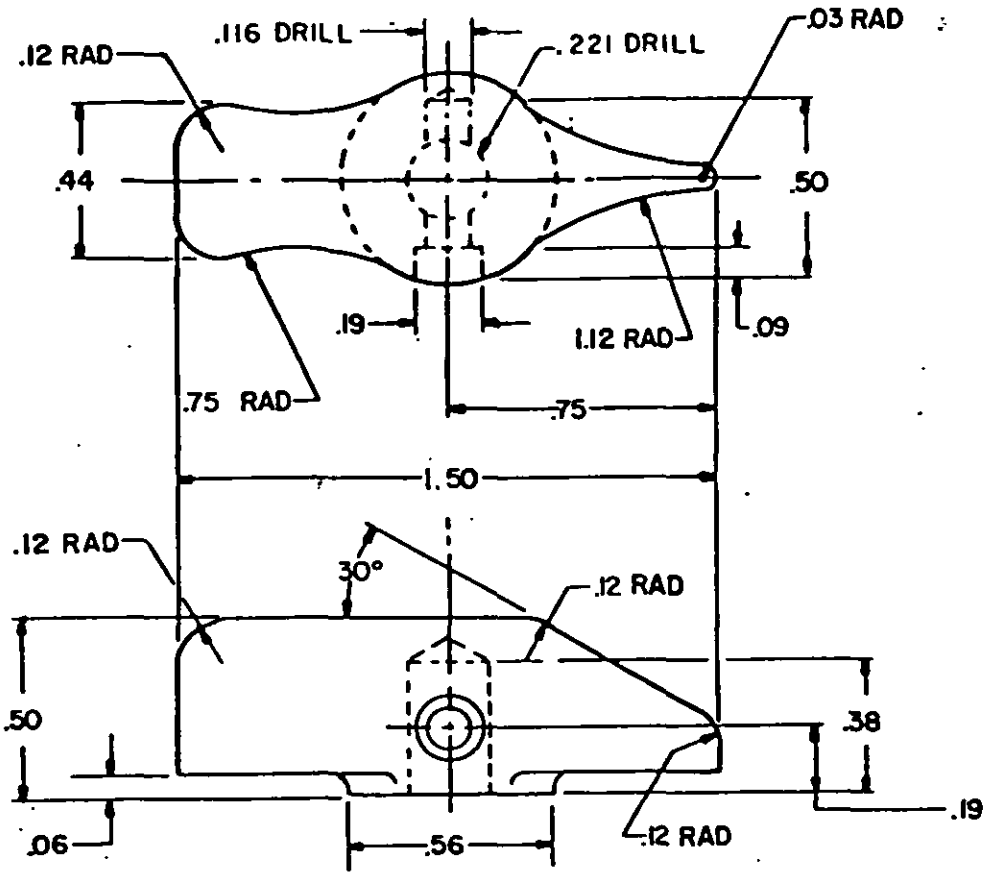


FIGURE 4. Handle. (06)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:57Z
Check the source to verify that this is the current version before use.

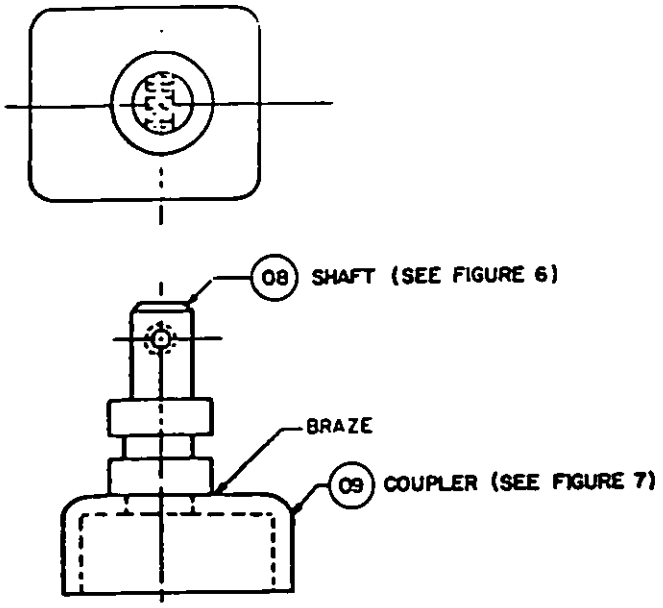


FIGURE 5. Shaft assembly. (07)

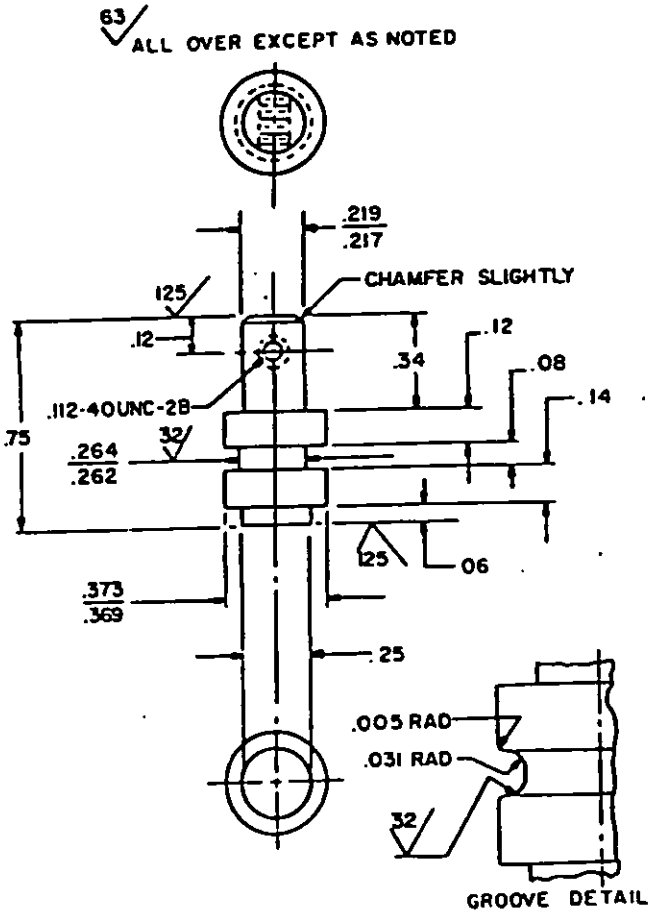


FIGURE 6. Shaft. (08)

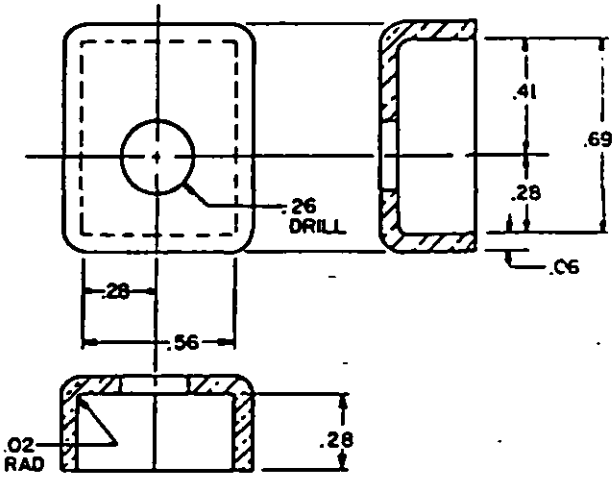


FIGURE 7. Coupler. (09)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:57Z
Check the source to verify that this is the current version before use.

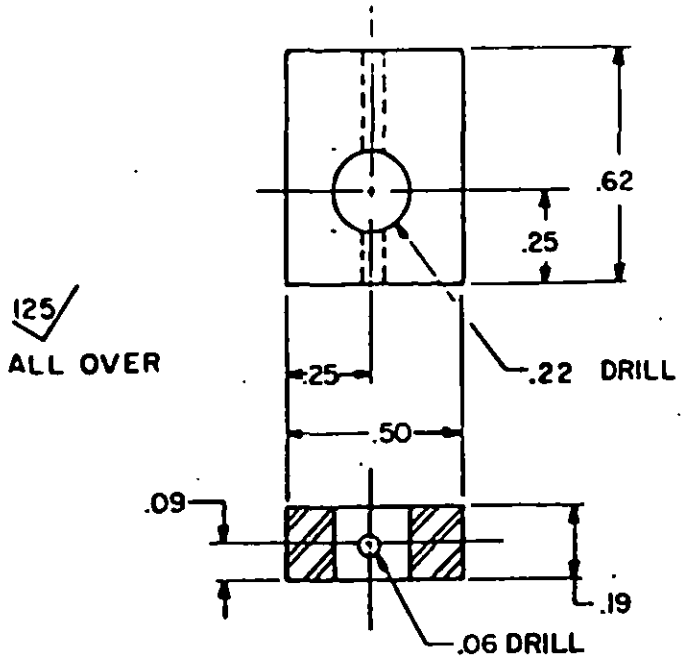


FIGURE 8. Coupler plate. (10)

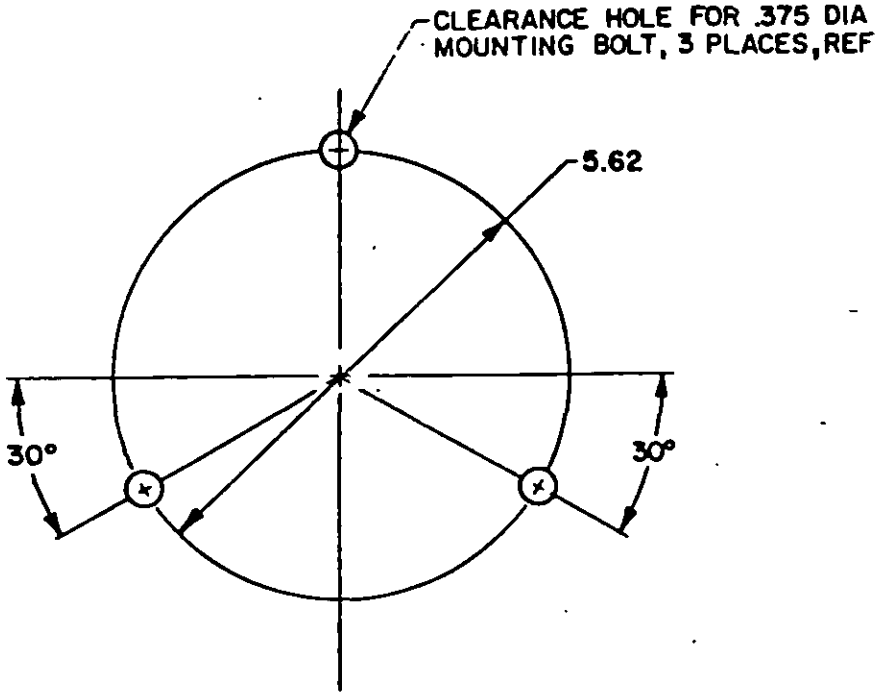


FIGURE 9. Mounting dimensions, ref.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:57Z
Check the source to verify that this is the current version before use.

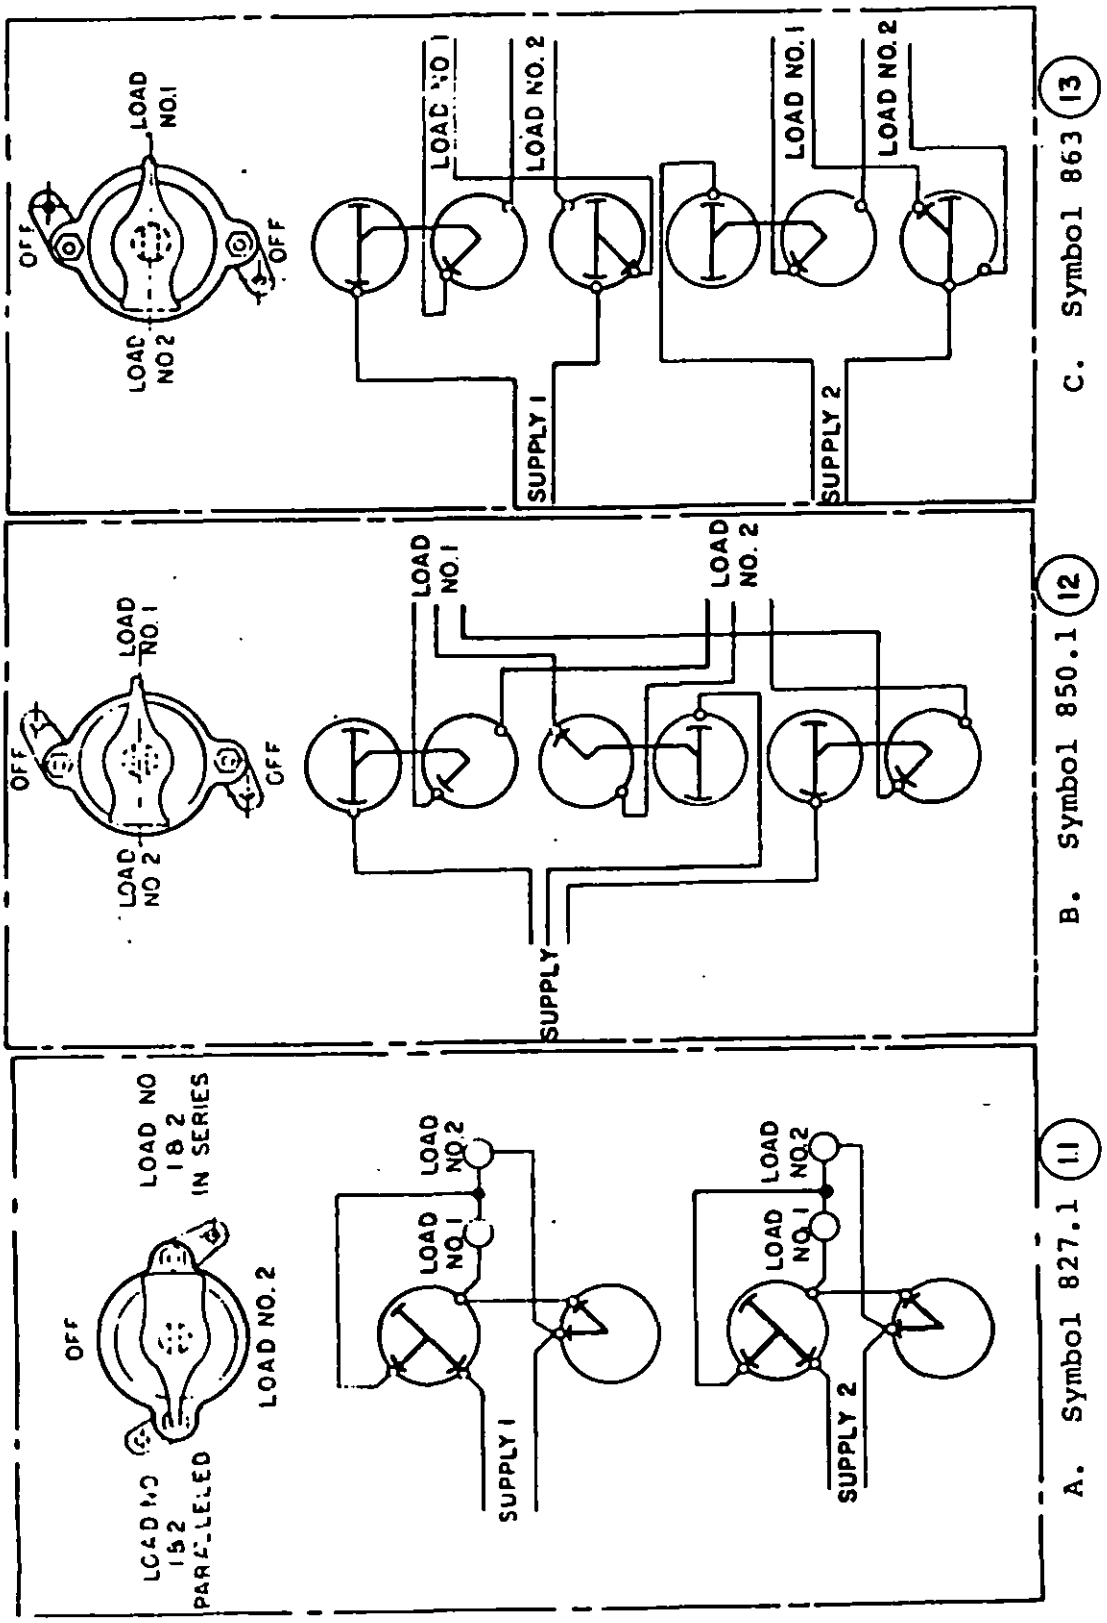


FIGURE 10. Wiring diagrams.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:57Z
Check the source to verify that this is the current version before use.

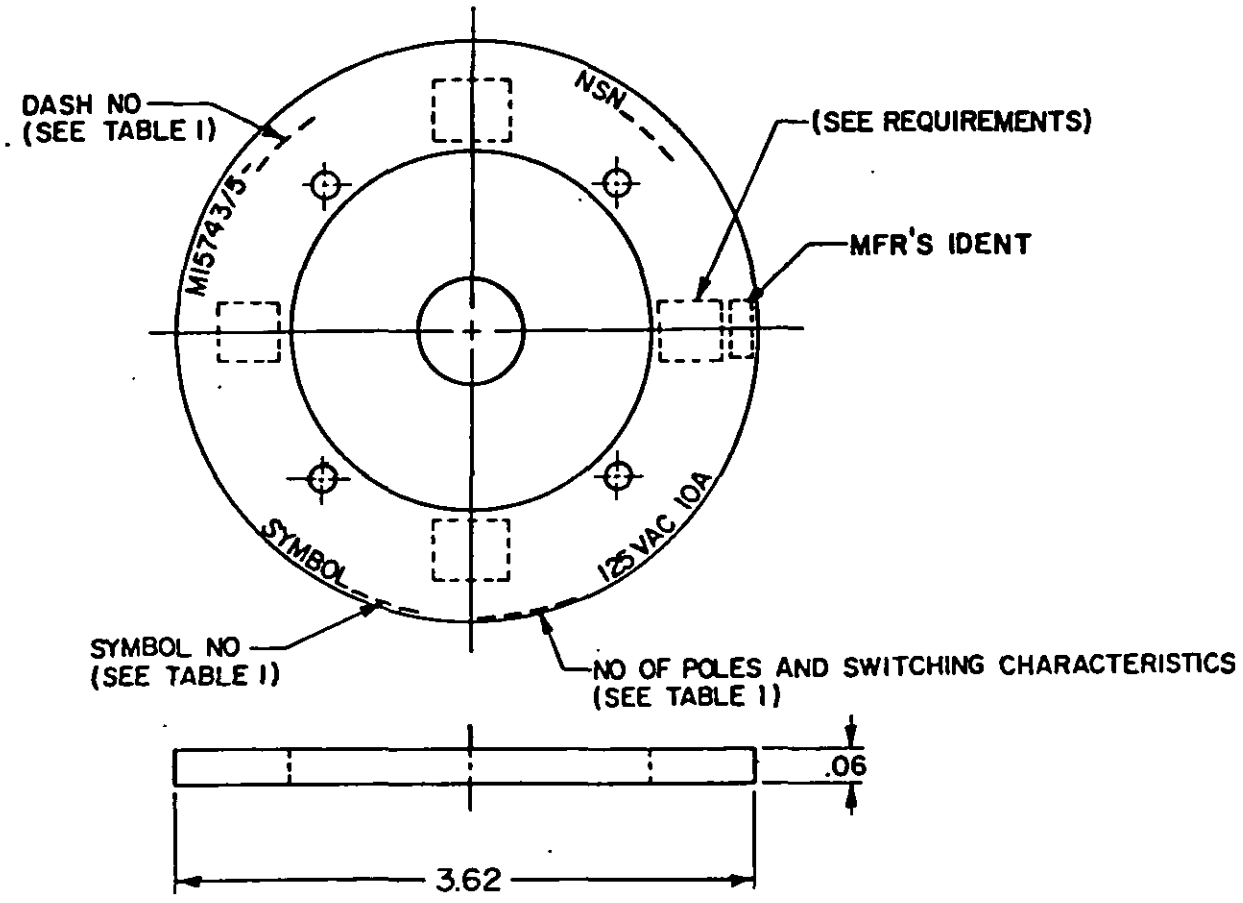


FIGURE 11. Identification plate. (17)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:57Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

SYMBOL NUMBER: See table I.

DESIGN:

Electrical rating: 125 Va.c., 0-10 ampere, 60 Hz.
Dimensions and configuration: See figures 1 through 8.
Wiring diagram: See figure 10.
Mounting dimensions: See figure 9.
Degree of enclosure: Submersible (15 feet).
Weight:
(a) Symbols 827.1 and 850.1 3 pounds maximum.
(b) Symbol 863 3 pounds maximum.
Designation and marking: See figure 10.
Identification data shall be as shown on figure 10. Unless otherwise specified in the ordering data, ON-OFF switch action marking shall be as shown on figure 10 and all others shall be left blank.
Parts: The parts shown in table II and as specified in MIL-S-15743 shall be used in the construction of the switches specified herein.

GENERAL INFORMATION:

Military part numbers and general information are as shown in table I.

TABLE I. Military part numbers and general information.

Military part no.	Symbol no.	No. of poles and switching characteristics	Supersedes 1/		
			Type	Unit	Sheet
M15743/5-001	827.1	SPECIAL	1SRSS4-2	8	9
M15743/5-002	850.1	TPDT	1SR3B4-2	5	6
M15743/5-003	863	4PDT	1SR4B4-2	12	13

1/ NAVSEA Drawing 9000-S6202-74207, in part.

ORDERING DATA:

Acquisition documents should specify the following:
Switch action marking, if required (see requirements).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:57Z
Check the source to verify that this is the current version before use.

TABLE II. Parts list.

Item no. 1/	Description	Quantity M15743/5-			Material/specification	Remarks
		001	002	003		
01	Switch, enclosed (sym 827.1)	-				See figure 1
02	Switch, enclosed (sym 850.1)		-			See figure 1
03	Switch, enclosed (sym 863)			-		See figure 1
04	Enclosure	1	1	1	Brass, MIL-E-24142/5 (modified)	See figure 2 & 3 M24142/5-002
05	O-ring	1	1	1	MS28775-010	----
06	Handle	1	1	1	Copper alloy ASTM B 584	See figure 4
07	Shaft assembly	1	1	1	----	See figure 5
08	Shaft	1	1	1	Ni-Cu alloy of QQ-N-281	See figure 6
09	Coupler	1	1	1	Brass, ASTM B 36, ASTM B 121	See figure 7
10	Coupler plate	1	1	1	CRES, class 304 or 316 of QQ-S-766	See figure 8
11	Wiring diagram	1			MIL-E-2036	See figure 10
12	Wiring diagram		1		MIL-E-2036	See figure 10
13	Wiring diagram			1	MIL-E-2036	See figure 10
14	Switch (type 1SRSS4)	1			Drawing 9000-S6202-74085	
15	Switch (type 1SR3B4)		1		MIL-S-15291/3	M15291/3-011
16	Switch (type 1SR4B4)			1	MIL-S-15291/3	M15291/3-012
17	Identification plate	1	1	1	ASTM B 36, ASTM B 121	See figure 11

1/ Numbers in circles shown on the figures are the same as the item numbers shown in this table.

Revision letters are not used to denote changes due to the extensiveness of the changes.

Preparing activity:
Navy - SH
(Project 5930-N746-5)

Source: https://assist.dla.mil -- Downloaded: 202640-18T07:57Z
Check the source to verify that this is the current version before use.