NOTE. The document identifier and heading have been changed on this page to reflect that this is a performance specification. There are no other changes to this document. The document identifier on subsequent pages has not been changed, but will be changed the next time this document is revised.

PERFORMANCE SPECIFICATION SHEET

FILTERS, RADIO FREQUENCY INTERFERENCE,

HERMETICALLY SEALED, STYLE FL98

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the filters described herein shall consist of this specification and the latest issue of MIL-F-15733.


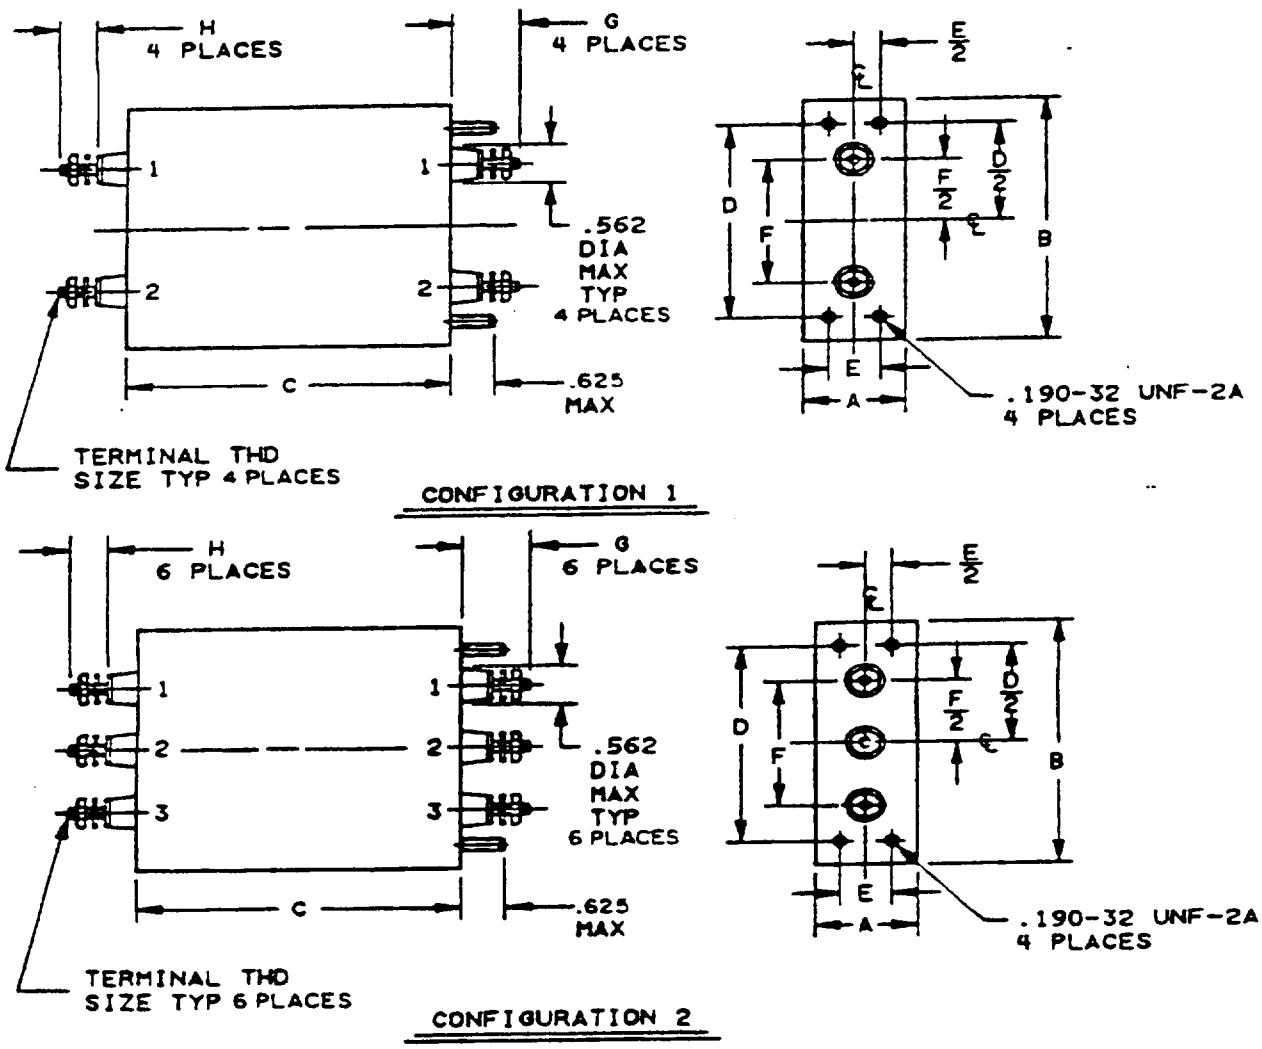



FIGURE 1. Case dimensions and circuit diagrams

FSC 5915

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:33Z
Check the source to verify that this is the current version before use.

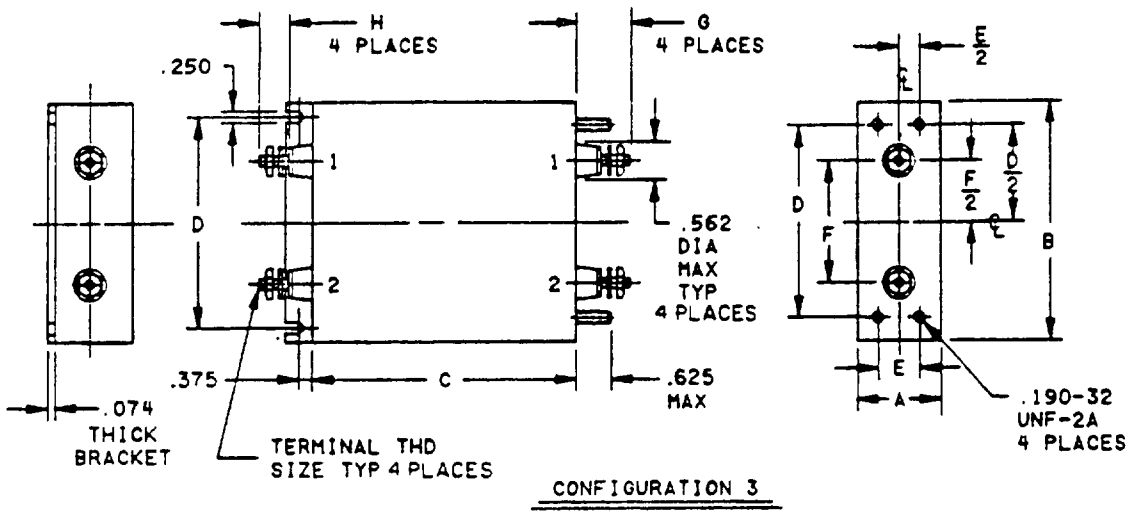

CONFIGURATION 3

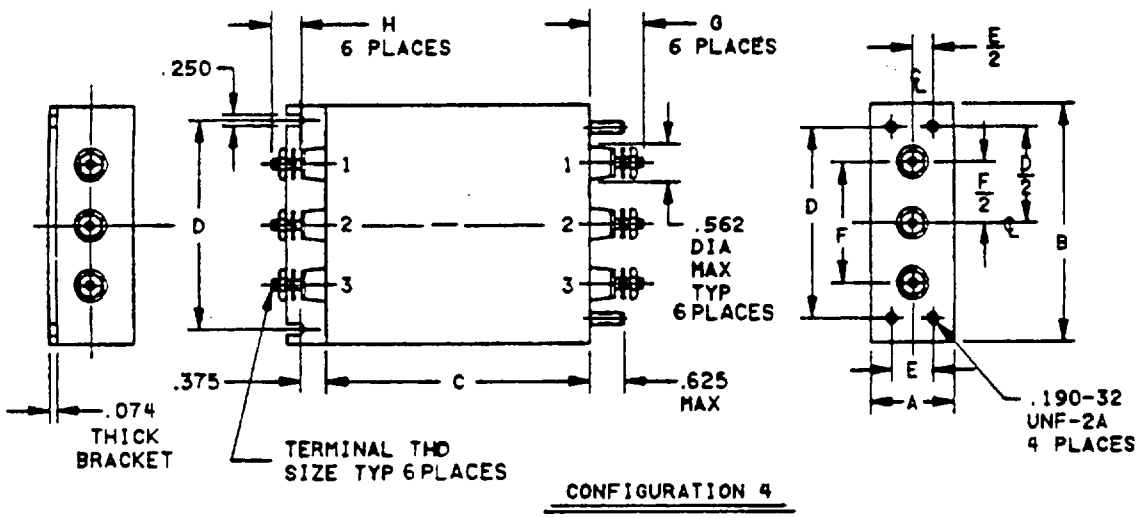


CONFIGURATION 4


FIGURE 1. Case dimensions and circuit diagram - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:33Z
Check the source to verify that this is the current version before use.


INCHES	MM
.074	1.88
.190	4.83
.25	6.4
.375	9.53
.562	14.27
.625	15.88



CIRCUIT DIAGRAM



LOCKWASHER

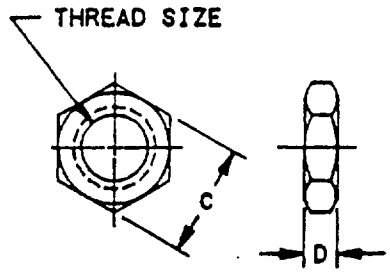

HEX NUT

HARDWARE

Mounting Hardware				
A ±.005	B ±.005	C ±.010	D ±.005	Thread size
.375 (9.53)	.022 (.56)	.375 (9.53)	.125 (3.18)	.190-32 UNF-2B
Terminal Hardware				
.330 (8.38)	.02 (.5)	.344 (8.74)	.125 (3.18)	.164-32 UNC-2B
.375 (9.53)	.022 (.56)	.375 (9.53)	.125 (3.18)	.190-32 UNF-2B
.472 (11.99)	.025 (.64)	.437 (11.10)	.156 (3.96)	.250-20 UNC-2B

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Metric equivalents are in parentheses.
4. Circuit diagram is for information only.
5. Mounting hardware shall be supplied with filter.
6. Terminal hardware shall be supplied with filter.
7. Recommended mounting torque 192 oz-in maximum.
8. Recommended terminal torque as follows:

Thread	Torque
.164-32 UNC-2A	64 oz-in max.
.190-32 UNF-2A	96 oz-in max.
.250-20 UNC-2A	192 oz-in max.

9. Tolerances, unless otherwise specified shall be ±.031.
10. Marking shall include the numbers shown in figure 1 next to the terminals.

FIGURE 1. Case dimensions and circuit diagram - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:33Z
Check the source to verify that this is the current version before use.

Dash Number	A ±.03	B ±.03	C ±.03	D ±.020	E ±.015	F ±.03	G Maximum	H Minimum	Terminal thread	Config-uration number	Weight pounds max. (kg)
0001	1.13 (28.7)	2.25 (57.2)	3.58 (90.9)	1.750 (44.45)	.625 (15.88)	.75 (19.05)	.69 (17.5)	.290 (7.37)	.164-32 UNC-2A	1	.93 (.42)
0002	1.50 (38.1)	3.00 (76.2)	4.94 (125.5)	2.500 (63.5)	1.000 (25.4)	1.50 (38.1)	"	"	"	1	1.79 (.81)
0003	1.25 (31.8)	2.50 (63.5)	4.71 (119.6)	2.000 (50.8)	0.750 (19.05)	1.25 (31.8)	"	"	"	1	1.17 (.53)
0004	1.50 (38.1)	3.00 (76.2)	5.57 (141.5)	2.500 (50.8)	1.000 (25.4)	1.50 (38.1)	"	"	"	1	2.07 (.94)
0005	1.50 (38.1)	3.00 (76.2)	5.37 (136.4)	2.500 (50.8)	1.000 (25.4)	1.50 (38.1)	"	"	"	1	2.15 (.98)
0006	2.25 (57.2)	4.50 (114.3)	6.44 (163.6)	4.000 (101.6)	1.125 (28.58)	2.25 (57.2)	"	"	"	2	4.38 (1.99)
0007	1.75 (44.5)	3.50 (88.9)	6.19 (157.2)	3.000 (76.2)	1.250 (31.75)	1.75 (44.5)	"	"	"	2	2.88 (1.31)
0008	2.25 (57.2)	4.50 (114.3)	6.08 (154.4)	4.000 (101.6)	1.750 (44.45)	2.25 (57.2)	"	"	.190-32 UNF-2A	2	4.41 (2.00)
0009	2.25 (57.2)	4.50 (114.3)	6.94 (176.3)	4.000 (101.6)	1.750 (44.45)	2.25 (57.2)	1.25 (31.8)	.600 (15.2)	.250-20 UNC-2A	2	5.24 (2.38)
0010	1.13 (28.7)	3.38 (85.9)	3.58 (90.9)	2.875 (73.03)	.625 (15.88)	2.00 (50.8)	.69 (17.5)	.290 (7.37)	.164-32 UNC-2A	3	1.28 (.58)
0011	1.50 (38.1)	4.50 (114.3)	4.94 (125.5)	4.000 (101.6)	1.000 (25.4)	3.00 (76.2)	"	"	"	3	2.67 (1.21)
0012	1.25 (31.8)	3.75 (95.3)	4.71 (119.6)	3.250 (82.55)	.750 (19.05	2.50 (63.5)	"	"	"	3	1.91 (.87)
0013	1.50 (38.1)	4.50 (114.3)	5.57 (141.5)	4.000 (101.6)	1.000 (25.4)	3.00 (76.2)	"	"	"	3	3.1 (1.4)
0014	1.50 (38.1)	4.50 (114.3)	5.37 (136.4)	4.000 (101.6)	1.000 (25.4)	3.00 (76.2)	"	"	"	3	2.82 (1.3)
0015	2.25 (57.2)	6.57 (166.9)	6.44 (163.6)	6.250 (158.75)	1.750 (44.45)	4.50 (114.3)	"	"	"	4	6.82 (3.1)
0016	1.75 (44.5)	5.25 (133.6)	6.19 (157.2)	4.750 (120.65)	1.250 (31.75)	3.50 (88.9)	"	"	"	4	4.29 (1.9)
0017	2.25 (57.2)	6.75 (171.5)	6.08 (154.4)	6.250 (158.75)	1.754 (44.45)	4.50 (114.3)	"	"	.190-32 UNF-2A	4	6.62 (3.0)
0018	2.25 (57.2)	6.75 (171.5)	6.94 (176.3)	6.250 (158.75)	1.750 (44.45)	4.50 (114.3)	1.25 (31.8)	.600 (15.2)	.250-20 UNC-2A	4	6.87 (3.1)

FIGURE 1. Case dimensions and circuit diagrams - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:33Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction:

Dimensions and configuration: See figure 1.

Case: Metal.

Weight: See figure 1.

Rated voltage (each circuit): 400 volts dc, 115 volts ac from dc to 400 Hz.

Rated current (each circuit): See table I.

Insertion loss:

At +25°C, each circuit: See table I.
At -55°C and +85°C, each circuit: Insertion loss shall be as specified in table I with exception of up to 10 MHz, a degradation of 2 dB from the value specified in table I shall be allowed.

Operating temperature range: -55°C to +85°C.

Seal: Method 112, test condition A, MIL-STD-202.

Capacitance: Not applicable.

Temperature rise: In accordance with MIL-F-15733 except all circuits of the filter shall be energized with rated current at maximum rated frequency in still air.

25°C for parts rated up to and including 10 amperes per circuit.
35°C for parts rated above 10 amperes per circuit.

Dielectric withstanding voltage: Each circuit of the filter shall be tested in accordance with MIL-F-15733.

Maximum charging current: 50 mA.

Barometric pressure (reduced): Each circuit of the filter shall be tested in accordance with MIL-F-15733.

Insulation resistance: The insulation resistance of each circuit of the filter shall be 1000 megohms minimum.

Maximum charging current: 50 mA.

Voltage drop: 1.15 volts ac (rms) or dc maximum for each circuit.

Overload: Each circuit of the filter shall be tested in accordance with MIL-F-15733.

Terminal strength: Method 211, test condition E, MIL-STD-202.

Resistance to soldering heat: Not applicable.

Solderability: Not applicable.

Salt spray (corrosion): Method 101, test condition B, MIL-STD-202.

Shock (specified pulse): In accordance with MIL-F-15733 and test condition I (100 g's), method 213, MIL-STD-202.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:33Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics.

Dash number	Number of circuits	Rated current (amps) (each circuit)	Minimum insertion loss (dB) in accordance with MIL-STD-220 1/ (each circuit)								
			At +25°C								
			150 kHz	300 kHz	500 kHz	1 MHz	10 MHz	50 MHz	100 MHz	1 GHz	10 GHz
0001	2	3	60	80	80	80	80	80	80	80	80
0002	"	3	80	"	"	"	"	"	"	"	"
0003	"	5	60	"	"	"	"	"	"	"	"
0004	"	5	80	"	"	"	"	"	"	"	"
0005	"	10	60	"	"	"	"	"	"	"	"
0006	"	10	80	"	"	"	"	"	"	"	"
0007	"	20	60	"	"	"	"	"	"	"	"
0008	"	30	60	"	"	"	"	"	"	"	"
0009	"	50	60	"	"	"	"	"	"	"	"
0010	3	3	60	"	"	"	"	"	"	"	"
0011	"	3	80	"	"	"	"	"	"	"	"
0012	"	5	60	"	"	"	"	"	"	"	"
0013	"	5	80	"	"	"	"	"	"	"	"
0014	"	10	60	"	"	"	"	"	"	"	"
0015	"	10	80	"	"	"	"	"	"	"	"
0016	"	20	60	"	"	"	"	"	"	"	"
0017	"	30	60	"	"	"	"	"	"	"	"
0018	"	50	60	"	"	"	"	"	"	"	"

1/ Full-load insertion loss measurements shall be performed over the frequency range of 150 kHz to 10 MHz, inclusive. Measurements below or above this frequency range shall be performed at no-load.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:33Z
Check the source to verify that this is the current version before use.

Vibration, low frequency: In accordance with MIL-F-15733 except following the vibration test the filters shall be visually examined for evidence of physical damage. Each circuit of the filter shall be subjected to the insertion loss (check test) and shall meet the initial requirements.

QUALITY ASSURANCE PROVISIONS

Extent of qualification:

Qualification testing and approval to M15733/75-0002 and M15733/75-0009 shall be sufficient to grant qualification approval to M15733/75-0001 through M15733/75-0009, inclusive.

Qualification testing and approval M15733/75-0011 and M15733/75-0018 shall be sufficient to grant qualification approval to M15733/75-0001 through M15733/75-0018.

Part number: M15733/75- (dash number from table I).

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - AR, MI
Navy - SH
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - AT, AV, ME
Navy - AS, MC, OS, YD
Air Force - 19

Agent:
DLA - ES

Preparing activity:
Navy - EC

(Project 5915-0260-1)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:33Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:33Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-F-15733/75	FILTERS, RADIO FREQUENCY INTERFERENCE, HERMETICALLY SEALED, STYLE FL98

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
	☐ USER
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:33Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY
Naval Electronic Systems Command
Washington, DC 20363

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

COMMANDER
NAVAL ELECTRONIC SYSTEMS COMMAND
DEFENSE STANDARDIZATION PROGRAM BRANCH
DEPARTMENT OF THE NAVY
WASHINGTON, DC 20363
ATTN: ELEX 8111

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:33Z
Check the source to verify that this is the current version before use.