NOT MEASUREMENT SENSITIVE


MIL-B-41809/16E
14 May 1990
SUPERSEDING
MIL-B-41809/16D
31 December 1978

MILITARY SPECIFICATION SHEET

BADGE, IDENTIFICATION, VICE PRESIDENTIAL SERVICE

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-B-41809.

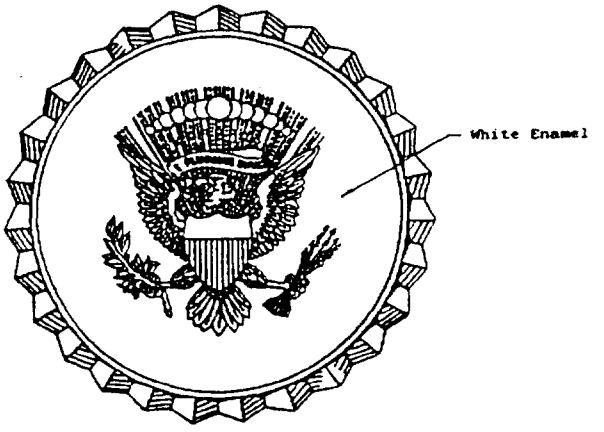

MATERIAL:
BASE AND CENTER DISC: Gilding metal
DEVICE: Red brass

DIMENSIONS:
OUTSIDE DIAMETER: 1-15/16 inch (4.92 cm) (REF)
DIAMETER OF CENTER DISC: 1-23/32 inch (4.37 cm) (REF)
OVERALL HEIGHT OF DEVICE: 1-13/64 inch (3.06 cm) (REF)
DEVICE (Thickness at shield): 1/16 inch (0.16 cm)
ASSEMBLED THICKNESS (At shield): .250 inch, - .010, + 0
(0.635 cm), - (0.025 cm), + 0

FINISH:
BASE: Gold plated, matte finish
CENTER DISC: Hard enameled, gold plated, mirror-like polished
DEVICE: Gold plated, matte finish, polished highlights

NOTES:
1. Attaching device shall be prong and clutch type. Three prongs shall be located on a 1-1/2 inch (3.81 cm) diameter circle. Each prong shall be 120 degrees apart with one prong located on the vertical centerline at the top of the badge.

AMSC N/A FSC 8455
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:35Z
Check the source to verify that this is the current version before use.

2. The center disc and the superimposed device shall be secured to the base by two or more rivets or soft soldered. When rivets are used, they may be an integral part of the device or fabricated from any type brass and soldered to the reverse of the device. The device shall follow the contour of the white enamel disc.
3. White enamel color shall match TIOH color chip 28 or the standard sample.
4. Each badge shall be engraved with a serial number as specified in the procurement document using a condensed roman numeral. The numerals shall be 3/32 inch (0.24 cm) in height. The serial number shall be centered on the reverse of the badge with the base line of the number 1/4 inch (0.64 cm) from the lower edge of the badge.
5. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of manufacturer. Epoxy resin shall have a shore D hardness of 85 and incorporate an ultra violet inhibitor. When epoxy resin is used, rivets shall be used to attach the center disc and device to the base.
6. The entire badge shall be lacquered after assembly.

Custodians:
Army - IH
Air Force - 11
Navy - NU

Review activities:
Air Force - 82, 99
Navy - SA, MC
DLA - CT

Preparing activity:
Army - IH

(Project No. 8455-0492)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:35Z
Check the source to verify that this is the current version before use.