NOT MEASUREMENT SENSITIVE


MIL-B-41809/20H
21 September 1994
SUPERSEDING
MIL-B-41809/20G
6 March 1992

MILITARY SPECIFICATION SHEET

BADGE, IDENTIFICATION, JUNIOR ROTC INSTRUCTOR, AIR FORCE

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-B-41809.

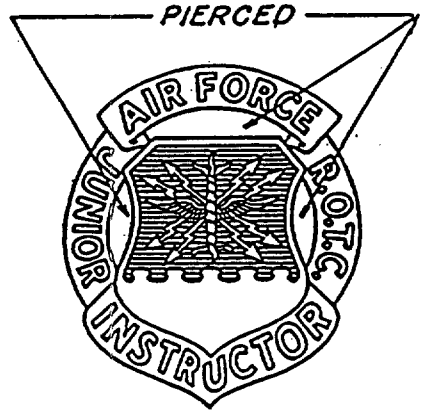

MATERIAL: Red Brass or Nickel Silver

FINISH: Nickel Plated (Red Brass only), Mirror-like Polished and shall match TIOH Metal Finish Chip Number 16.

DIMENSIONS:
HEIGHT (Overall): 1-7/8 inch (4.76 cm) (REF)
WIDTH (Overall): 1-5/8 inch (4.13 cm) (REF)
THICKNESS (Edge of outer scrolls): 0.060 inch ± .005 (0.152 cm ± 0.012 cm)

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:36Z
Check the source to verify that this is the current version before use.

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Pierced areas shall be as indicated.

3. The attaching device shall be prong and clutch type. One prong shall be located at the intersection of the vertical center line of the badge and the center of the top scroll. Two prongs shall be located on a horizontal line, 5/8 inch ± 1/6 inch (1.59 cm ± 0.16 cm) above the bottom of the badge, equidistant from each end and 1-1/4 inch ± 1/16 inch (3.18 cm ± 0.16 cm) apart.

4. The badge shall be dapped to a radius of 3 inches ± 1/2 inch (7.62 cm ± 1.17 cm) along the horizontal plane.

Custodian:
Army - IH
Air Force - 45

Review activities:
Air Force - 32, 82, 99
DLA - CT

Preparing activity:
Army - IH

(Project No. 8455-0766)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:36Z
Check the source to verify that this is the current version before use.