
MIL-B-41809 / 26A
31 DECEMBER 1978
SUPERSEDING
MIL-B-41809/26
19 June 75

MILITARY SPECIFICATION SHEET

BADGE, IDENTIFICATION, RECRUIT COMPANY COMMANDER, NAVY

This specification is approved for use by all Departments and Agencies of the Department of Defense. The complete requirements for procuring the item(s) described herein shall consist of this document and the issue in effect of Specification MIL-B-41809.

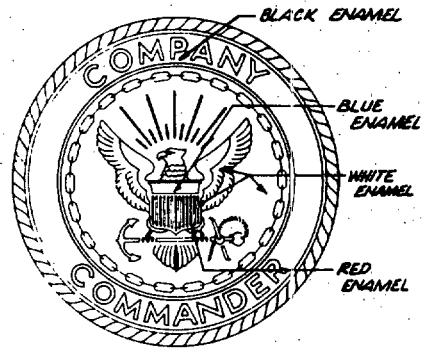

MATERIAL: GILDING METAL
DIMENISONS (INCHES):
DIAMETER: 2 (REF)
THICKNESS (THICKEST POINT): .075 ± .010
FINISH: ENAMELED, GOLD PLATED, HIGHLY POLISHED

NOTES:

1. ENAMEL AREAS SHALL BE AS INDICATED. ENAMEL SHALL MATCH THE ENAMEL ON THE STANDARD SAMPLE AND THE TIOH COLOR CHIPS LISTED BELOW:

	TIOH CHIP NO.
BLUE	18
BLACK	26
WHITE	28
RED	1

2. THE ATTACHING DEVICE SHALL BE PRONG AND CLUTCH TYPE. THREE PRONGS SHALL BE LOCATED ON A 1-5/8 INCH DIAMETER CIRCLE WITH EACH PRONG 120 DEGREES APART WITH ONE PRONG LOCATED ON THE VERTICAL CENTER LINE AT THE TOP OF THE BADGE.

3. THE BADGE SHALL BE SPHERICALLY DAPPED 1/8 ± 1/32 INCH. THE DAP SHALL BE MEASURED ON THE REVERSE SIDE, AT THE CENTER OF THE BADGE.

CUSTODIANS:	REVIEW ACTIVITIES:	USER ACTIVITIES:	PREPARING ACTIVITY:
ARMY			
NAVY	SA	SA	THE INSTITUTE OF HERALDRY, UNITED STATES ARMY
AIR FORCE			
DLA		CT	

Project No. 8455-0248

/FSC 8455/

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:37Z
Check the source to verify that this is the current version before use.