NOT MEASUREMENT SENSITIVE


MIL-B-41809/26C
21 September 1994
SUPERSEDING
MIL-B-41809/26B
14 May 1990

MILITARY SPECIFICATION SHEET

BADGE, IDENTIFICATION, RECRUIT COMPANY COMMANDER, NAVY

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-B-41809.

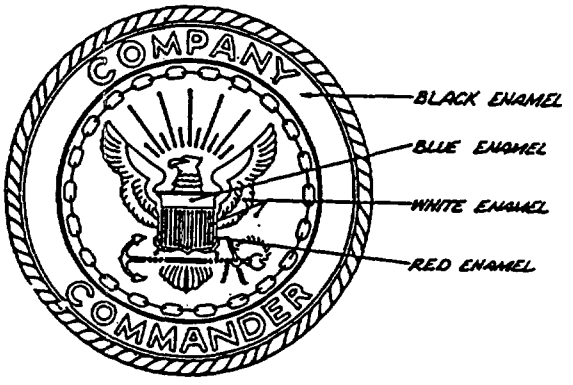

MATERIAL: Gilding Metal

FINISH: Hard Enameled, Gold Plated, Mirror-like Polished and shall match TIOH Metal Finish Chip Number 6.

DIMENSIONS:
DIAMETER: 2 inches (5.08 cm) (REF)
THICKNESS (At Thickest Point): 0.075 inch ± 0.010 inch (0.190 cm ± 0.025 cm)

AMSC N/A FSC 8455
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:37Z
Check the source to verify that this is the current version before use.

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Enameled areas shall be as indicated. The color shall conform to the TIOH chip numbers listed below or the standard sample.

COLOR	CHIP NUMBER
Red	1
Blue	18
Black	26
White	28

3. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of the manufacturer.

4. Attaching device shall be prong and clutch type. Three prongs shall be located on a 1-5/8 inch (4.13 cm) diameter circle. Each prong shall be 120 degrees apart with one prong located on the vertical center line at the top of the badge.

5. The badge shall be spherically dapped 1/8 inch ± 1/32 inch (0.32 cm ± 0.08) in depth when measured on the reverse.

Custodian:
Army - IH
Navy - NU

Review activities:
DLA - CT

Preparing activity:
Army - IH

(Project No. 8455-0766)

Source: https://assist.dla.mil Downloaded: 2026-10-21T19:37Z
Check the source to verify that this is the current version before use.