MIL-B-41809 / 27A
31 DECEMBER 1978
SUPERSEDING
MIL-B-41809/27
19 June 75

MILITARY SPECIFICATION SHEET

BADGE, IDENTIFICATION; CAREER COUNSELOR, NAVY

This specification is approved for use by all Departments and Agencies of the Department of Defense. The complete requirements for procuring the item(s) described herein shall consist of this document and the issue in effect of Specification MIL-B-41809.

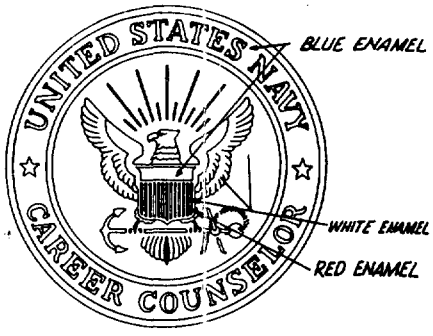

MATERIAL: GILDING METAL
DIMENSIONS (INCHES):
DIAMETER: 2 (REF)
THICKNESS (THICKEST POINT): .075 ± .010
FINISH: ENAMELED, GOLD PLATED, HIGHLY POLISHED

NOTES:

1. ENAMELED AREAS TO BE INDICATED. ENAMEL COLORS SHALL MATCH THE ENAMEL COLORS ON THE STANDARD OR APPROVED SAMPLE AND SHALL CONFORM TO THE TIOH COLOR CHIPS LISTED BELOW:

	TIOH CHIP NO.
BLUE	20
WHITE	28
RED	1

2. THE ATTACHING DEVICE SHALL BE PRONG AND CLUTCH THREE PRONGS SHALL BE LOCATED ON A 1-5/8 INCH DIAMETER CIRCLE WITH EACH PRONG 120 DEGREES APART WITH ONE PRONG LOCATED ON THE VERTICAL CENTER LINE AT THE TOP OF THE BADGE.

3. THE BADGE SHALL BE SPHERICALLY DAPPED 1/8 ± 1/32 INCH. THE DAP SHALL BE MEASURED ON THE REVERSE SIDE, AT THE CENTER OF THE BADGE.

CUSTODIANS:	REVIEW ACTIVITIES:	USER ACTIVITIES:	PREPARING ACTIVITY:
ARMY			
NAVY SA	SA		THE INSTITUTE OF HERALDRY, UNITED STATES ARMY
AIR FORCE			
DLA	CT		

Project No. 8455-0248

/FSC 8455/

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:37Z
Check the source to verify that this is the current version before use.