NOT MEASUREMENT SENSITIVE


MIL-B-41809/28B
14 May 1990
SUPERSEDING
MIL-B-41809/28A
31 December 1978

MILITARY SPECIFICATION SHEET

BADGE, IDENTIFICATION, SENIOR ENLISTED ADVISOR, NAVY

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-B-41809.

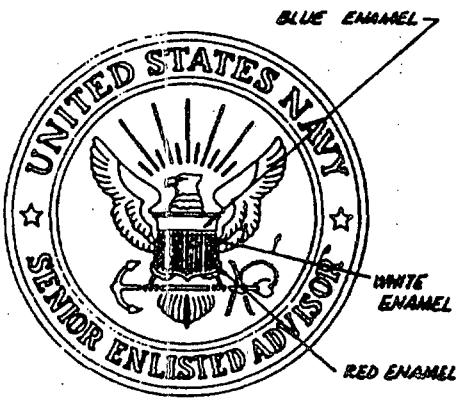

MATERIAL: Gilding metal

DIMENSIONS:
DIAMETER: 2 inches (5.08 cm) (REF)
THICKNESS (Thickest point): .075 inch ± .010 inch (0.190 cm) ± (0.025 cm)

FINISH: Hard enameled, gold plated, highly polished

NOTES:
1. Attaching device shall be prong and clutch type. Three prongs shall be located on a 1-5/8 inch (4.13 cm) diameter circle. Each prong shall be 120 degrees apart with one prong located on the vertical centerline at the top of the badge.
2. Enameled areas shall be as indicated. The color shall conform to the TIOH chip numbers listed below or the standard sample.

COLOR	CHIP NUMBER
Blue	20
Red	1
White	28

3. The badge shall be spherically dapped 1/8 inch ± 1/32 inch (0.32 cm) ± (0.08 cm) when measured on the reverse.

AMSC N/A FSC 8455
DISTRIBUTION STATEMENT A. Approved for public release; distribution

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:38Z
Check the source to verify that this is the current version before use.

4. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of manufacturer. Epoxy resin shall be a stoning epoxy, have a shore D hardness of 85, and incorporate an ultraviolet inhibitor.

Custodians:
Army - IH
Navy - SA

Review activity:
DLA - CT

Preparing activity:
Army - IH

(Project No. 8455-0503)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:38Z
Check the source to verify that this is the current version before use.