NOT MEASUREMENT SENSITIVE


MIL-B-41809/31A
14 May 1990
SUPERSEDING
MIL-B-41809/31
7 March 1979

MILITARY SPECIFICATION SHEET

BADGE, IDENTIFICATION, ARMY CONTINUING EDUCATION SYSTEM PERSONNEL

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-B-41809

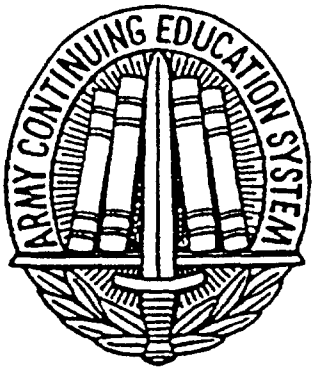

MATERIAL: Red brass or nickel silver

DIMENSIONS:
HEIGHT (Overall): 2-5/16 inch (5.87 cm) (REF)
WIDTH (Overall): 1-15/16 inch (5.92 cm) (REF)
THICKNESS (On lettering including depth of forced area): .120 inch ± .010 (0.304 cm) ± (0.025 cm)

WEIGHT (Maximum): 1.25 ounces (including attaching device)

FINISH: Nickel plated (red brass only), silver plated, oxidized, relieved, matte finish

NOTES:
1. Attaching device shall be a pin and top opening catch type. The stem shall be 1-1/2 inch (3.81 cm) long. The pin and catch shall be located on the vertical centerline with the joint 7/8 inch ± 1/64 inch (2.22 cm) ± (0.04 cm) below the top of the badge. The joint and catch shall be positioned on the same level plane to each other (platform areas on the reverse side may be used for leveling the joint and catch).

AMSC N/A FSC 8455
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:38Z
Check the source to verify that this is the current version before use.

2. A full forcer shall be used to bring up the design.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-0506)

AMSC N/A

FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:38Z
Check the source to verify that this is the current version before use.