NOT MEASUREMENT SENSITIVE


MIL-B-41809/31B
21 September 1994
SUPERSEDING
MIL-B-41809/31A
14 May 1990

MILITARY SPECIFICATION SHEET

BADGE, IDENTIFICATION, CONTINUING EDUCATION SYSTEM PERSONNEL, ARMY

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-B-41809.

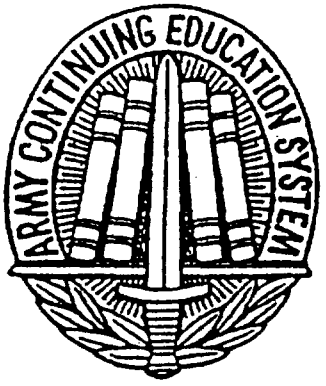

MATERIAL: Red Brass or Nickel Silver

FINISH: Nickel Plated (Red Brass Only), Silver Plated, Oxidized, Relieved, Matte Finish and shall match TIOH Metal Finish Chip Number 14.

DIMENSIONS:
HEIGHT (Overall): 2-5/16 inches (5.87 cm) (REF)
WIDTH (Overall): 1-15/16 inches (5.92 cm) (REF)
THICKNESS (On Lettering Including Depth of Forced Area): 0.120 inch ± 0.010 inch (0.304 cm ± 0.025 cm)

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:38Z
Check the source to verify that this is the current version before use.

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnis' hub or die.

2. A full forcer shall be used to bring up the design.

3. Attaching device shall be a pin and top opening catch type. The pin stem shall be 1-1/2 inch (3.81 cm) long. The pin and catch shall be located on the vertical center line with the joint 7/8 inch ± 1/64 inch (2.22 cm ± 0.04 cm) below the top of the badge. The joint and catch shall be positioned on the same level plane to each other (platform areas on the reverse side may be used for leveling the joint and catch).

Custodian:
Army - IH

Review activities:
DLA - CT

Preparing activity:
Army - IH

(Project No. 8455-0766)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:38Z
Check the source to verify that this is the current version before use.