NOT MEASUREMENT SENSITIVE


MIL-B-41809/33C
19 October 1990
SUPERSEDING
MIL-B-41809/33B
14 May 1990

MILITARY SPECIFICATION SHEET

BADGE, IDENTIFICATION, OFFICER IN CHARGE, USPHS

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-B-41809.

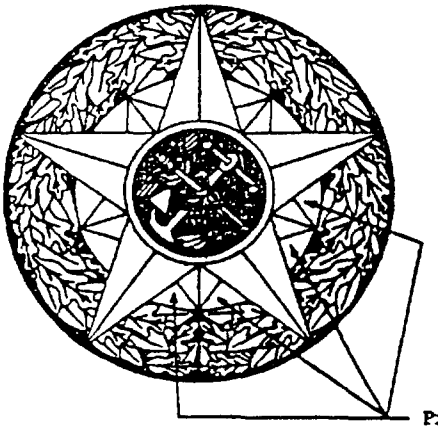

Pierced Typical (Regular Size Badge Only)

MATERIAL: Red brass or nickel silver

DASH NO:
-1: Regular size
-2: Miniature size

DIMENSIONS:
DIAMETER:
-1: 1-1/2 inches (3.81 cm) (REF)
-2: 3/4 inch (1.91 cm) (REF)
THICKNESS (Center including forced depth):
-1: 15/64 inch ± 1/64 inch (0.60 cm ± 0.04 cm)
-2: 3/16 inch ± 1/64 inch (0.48 cm ± 0.04 cm)

WEIGHT (Maximum):
-1: 1.0 ounce
-2: 3/4 ounce

FINISH: Nickel plated (red brass only), silver plated, oxidized, relieved, matte finish

NOTES:
1. A full forcer shall be used to bring up the design of the regular size badge.
2. The attaching device shall be prong and clutch type. For Dash No. 1, three prongs shall be located on a 1-1/4 inch (3.18 cm) diameter circle. Each prong shall be 120 degrees apart with one prong located on the vertical centerline at the top of the badge. For Dash No. 2, two prongs shall be located on the vertical centerline, equidistance from each end and 1/2 inch ± 1/64 inch (1.27 cm ± 0.04 cm) apart.

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:39Z
Check the source to verify that this is the current version before use.

Custodian:
Army - IH

Review activity:
DLA - CT

Preparing activity:
Army - IH

(Project No. 8455-0549)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:39Z
Check the source to verify that this is the current version before use.