NOT MEASUREMENT SENSITIVE


MIL-B-41809/35C
30 April 1992
SUPERSEDING
MIL-B-41809/35B
14 May 1990

MILITARY SPECIFICATION SHEET

BADGE, IDENTIFICATION, ARMY ROTC NURSE CADET PROGRAM

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-B-41809.

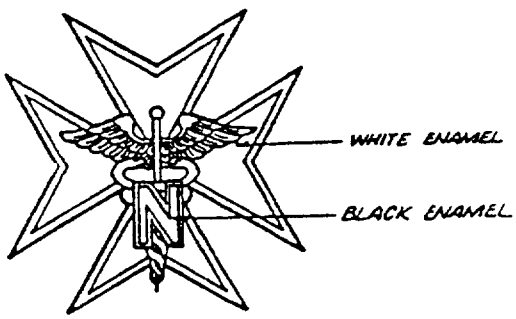

MATERIAL: Gilding Metal

DIMENSIONS:
- MALTESE CROSS:
  - HEIGHT (Overall): 53/64 inch (2.10 cm) (REF)
  - WIDTH (Overall): 53/64 inch (2.10 cm) (REF)
  - THICKNESS (At thickness point): 0.065 inch ± 0.005 inch (0.165 cm ± 0.012 cm)
- CADUCEUS:
  - HEIGHT (Overall): 1/2 inch (1.27 cm) (REF)
  - WIDTH (Overall): 39/64 inch (1.55 cm) (REF)
  - THICKNESS (Letter "N"): 0.140 inch ± 0.005 inch (0.355 cm ± 0.012 cm)

FINISH:
- MALTESE CROSS: Hard enameled, gold plated, mirror-like polished
- CADUCEUS: Hard enameled, gold plated, matte finish

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:39Z
Check the source to verify that this is the current version before use.

NOTES:

1. The attaching device shall be prong and clutch type. Two prongs shall be located on the vertical center line, equidistant from each end and 9/16 inch (9.43 cm) apart.

2. Enameled areas shall be as indicated. The color shall conform to the applicable TIOH color chips listed below or the standard sample:

COLOR	CHIP NO.
Black	26
White	28

3. The caduceus shall be located as shown and shall be secured to the cross by one hollow rivet.

4. Epoxy resin may be used in lieu of vitreous enamel at the option of the manufacturer. The epoxy resin shall be a stoning epoxy, have a shore D hardness of no less than 85 and incorporate an ultraviolet inhibitor.

5. The term (REF) refers to the measurements taken from the Government furnished hub or die.

6. As an alternate method of manufacturing, 22 karat gold plate with nickel underplating may be used.

Custodian:
Army - IH

Review activities:
DLA - CT

Preparing activity:
Army - IH

(Project No. 8455-0666)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:39Z
Check the source to verify that this is the current version before use.