MIL-B-41809/39
14 JUNE 1988

MILITARY SPECIFICATION SHEET

BADGE, IDENTIFICATION, DEFENSE MAPPING AGENCY

This specification is approved for use by all Departments and Agencies of the Department of Defense. The complete requirements for procuring the item(s) described herein shall consist of this document and the issue in effect of Specification MIL-B-41809.

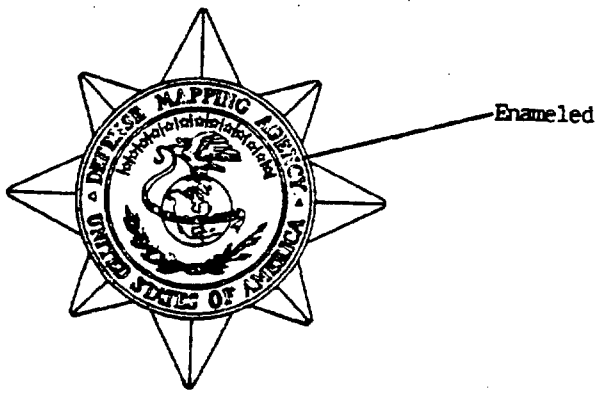

MATERIAL: Gilding Metal

DIMENSIONS (INCHES):
Diameter: 2-3/8 (REF)
Thickness: .060±.010 at thickest point

FINISH: Enameled, Oxidized, Relieved Satin Finish with Highlights Polished.

NOTES:

1. A full forcer shall be used to bring up the details of the design.
2. Attaching device shall be three prongs with clutches. The prongs shall be 7/16±1/64 inch long and .045±.002 inch in diameter. The prongs shall be soldered or fused to the reverse, one prong shall be located at the intersection of the vertical centerline in a circle 1-1/8 inch in diameter with the remaining prongs 120 degree apart.
3. The enamel color shall conform to the TIOH color chip listed and shall match the enamel color on the standard color chip.

Chip #20 Blue

Custodians:
Army - IH

User Activities:
Other - CT

Preparing Activity:
Army - IH

(Project No. 8455-0348)

AMSC N/A 1 of 1 FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:41Z
Check the source to verify that this is the current version before use.