MILITARY SPECIFICATION

MODULES, STANDARD ELECTRONIC

TERMINATOR, INTERFACE, DIGITAL, KEY CODE MDN

This amendment forms a part of MIL-M-28787/111A(EC), dated 10 December 1981, and is approved for use within the Space and Naval Warfare Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

PAGE 5

* 4.4.2, delete and substitute the following:

"4.4.2 Order of testing. Test conditions A through F shall be performed in any order with the following exceptions. Test conditions A, B2, and F are stress tests and will be performed only at 25°C ±5°C. If test conditions A, B, C, or F are part of a sequence of tests, the order of testing shall be as follows: A, B, C, F where applicable, followed by the remaining tests in the sequence."

* 4.5.1, fifth line: Delete "A through C" and substitute "B1 and C".

* 4.5.3, third line: Delete "A, B, and C" and substitute "B1 and C".

* 4.5.3, sixth line: Delete "A through F" and substitute "B1, C, D, E, and F".

6.3, delete and substitute the following:

"6.3 Cross reference of classification. Military Specification MIL-M-28787/111 supersedes Department of the Navy, Naval Ordnance Systems Command Drawing No. 10001-2658834. Part number M28787/111-1 supersedes part numbers 2658834 and M28787/111."

PAGE 11

* TABLE V: Delete and substitute new table as printed on page 2 of this amendment.

PAGE 12


* FIGURE 3: Delete and substitute new figure 3 as printed on page 3 of this amendment.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
Source: https://assist.dla.mil - Downloaded: 2026-10-20T16:04Z
Click to view the current version before use.

TABLE V. Capacitance test.

Test condition	Parameter	Connect		Initial limits 25°C ±5°C ambient		Unit	Test figure
		E to pin	F to pin	Min	Max		
D1	Capacitance	2	All other pins 3 interconnected except pin 23	0	30	pF	3
D2	"	22	" 23	"	"	"	"
D3	"	4	" 5	"	"	"	"
D4	"	24	" 25	"	"	"	"
D5	"	6	" 7	"	"	"	"
D6	"	26	" 27	"	"	"	"
D7	"	8	" 9	"	"	"	"
D8	"	28	" 29	"	"	"	"
D9	"	12	" 13	"	"	"	"
D10	"	32	" 33	"	"	"	"
D11	"	14	" 15	"	"	"	"
D12	"	34	" 35	"	"	"	"
D13	"	16	" 17	"	"	"	"
D14	"	36	" 37	"	"	"	"
D15	"	18	" 19	"	"	"	"
D16	"	38	" 39	"	"	"	"

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:04Z
Check the source to verify that this is the current version before use.

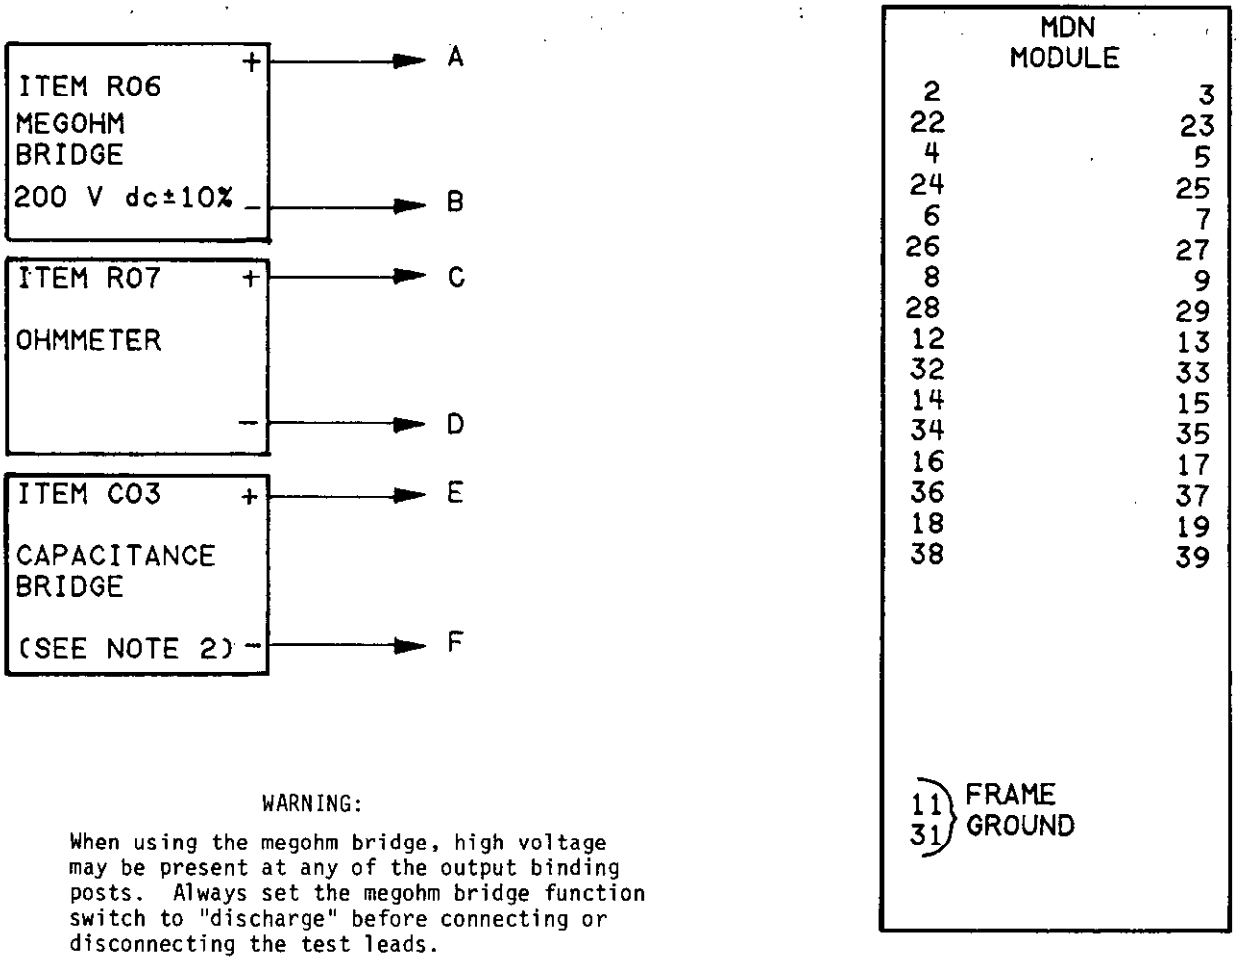

WARNING:

When using the megohm bridge, high voltage may be present at any of the output binding posts. Always set the megohm bridge function switch to "discharge" before connecting or disconnecting the test leads.

NOTES:
1. For test condition B2 penetrate the anodized finish on the module frame with a sharply pointed probe connected to the negative terminal of item R07.
2. For test conditions D1-D16:

   a. Test fixture and lead capacitance must be measured for each test condition prior to insertion of module into fixture and then subtracted from the capacitance measured with the module inserted. Test fixture and lead capacitance must not exceed 30 pF.
   b. Equivalent series capacitance shall be measured at a frequency of 10 kHz and a bridge voltage of 0.2 V rms maximum.

FIGURE 3. Module integrity, continuity, resistance, and capacitance test circuit for tables II, III, IV, and V.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:04Z
Check the source to verify that this is the current version before use.

The margin of this amendment is marked with asterisks to indicate where changes (additions, modifications, corrections, deletions) from the previous amendment were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous amendment.

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5963-N687)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:04Z
Check the source to verify that this is the current version before use.