MILITARY SPECIFICATION

MODULES, STANDARD ELECTRONIC

SWITCH, ANALOG, KEY CODE FAG

This amendments forms a part of Military Specification MIL-M-28787/113A(EC), dated 7 July 1981, and is approved for use by the Naval Electronic Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

PAGE 4

TABLE I, Test condition J1-J4, Max columns: Delete "30" (four places) and substitute "40" (four places).

PAGE 5

6.3, delete and substitute:

"6.3 Cross reference of classification. Military Specification MIL-M-28787/113 supersedes Department of the Navy, Naval Ordnance Systems Command Drawing No. 10001-2833693. Part number M28787/113-1 supersedes part numbers 2833693 and M28787/113."

PAGE 7

* FIGURE 3: Delete "Item P01-1", "Item P01-2", and "Item P01-3" and substitute "Item P07-1", "Item P07-2", and "Item P07-3", respectively.

PAGE 8

* FIGURE 4: Delete "Item P01" and substitute "Item P07".

PAGE 11

* FIGURE 5 Delete and substitute new figure 5 as printed on page 3 of this amendment.

PAGE 14

* FIGURE 6 Delete and substitute new figure 6 as printed on page 4 of this amendment.

PAGE 15

* FIGURE 7: Delete and substitute new figure 7 as printed on page 5 of this amendment.

PAGE 17

* FIGURE 8. Delete "Item P01-1", "Item P01-2", and "Item P01-3" and substitute "Item P07-1", "Item P07-2", and "Item P07-3" respectively.

PAGE 19

* FIGURE 9 Delete and substitute new figure 9 as printed on page 6 of this amendment.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:05Z
Check the source to verify that this is the current version before use.

PAGE 21

* FIGURE 10: Delete and substitute new figure 10 as printed on page 7 of this amendment.

PAGE 22

* FIGURE 11: Delete and substitute new figure 11 as printed on page 8 of this amendment.

PAGE 24

TABLE IX, Test conditions J1 through J4, Max column: Delete "30" and substitute "40".

PAGE 29

* FIGURE 15: Delete "Item P01-1", "Item P01-2", "Item P01-3", Item P01-4", and "Item P01-5" and substitute "Item P07-1", "Item P07-2", "Item P07-3", "Item P07-4", and "Item P07-5" respectively.

PAGE 30

* FIGURE 15, NOTE 5: Delete "item P01-4" (two places) and "item P01-5" (two places) and substitute "item P07-4" (two places) and "item P07-5" (two places) respectively.


NOTE. The margins of this amendment are marked with asterisks to indicate where changes from the previous amendment were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous amendment.

Agent:
DLA - ES

Preparing activity
Navy - EC

(Project 5963-N581)


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:05Z
Check the source to verify that this is the current version before use.

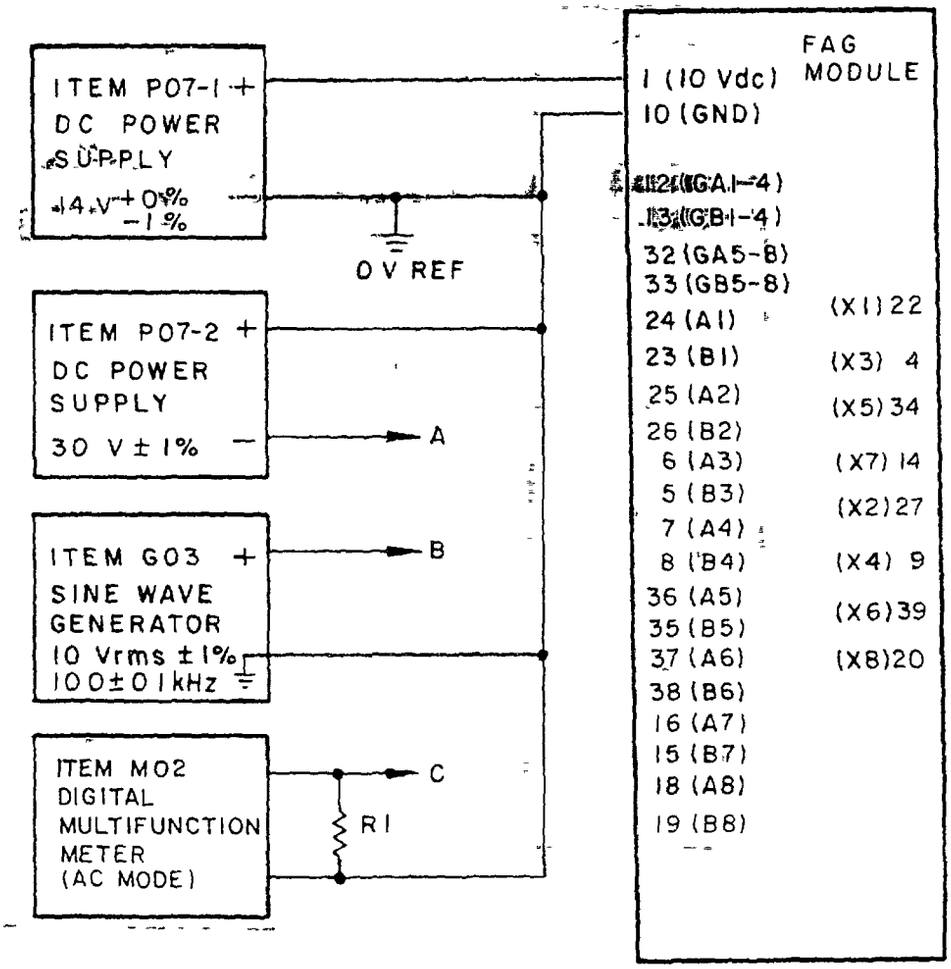

NOTES
1. R1 = 100 kΩ ±1%, 1/8 W.
2. If test condition is successively repeated, the time interval between execution of each of these test conditions should be a minimum of 10 seconds in order to preclude detrimental effects due to module heating.

FIGURE 5. Stress test circuit for table III.


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:05Z
Check the source to verify that this is the current version before use.

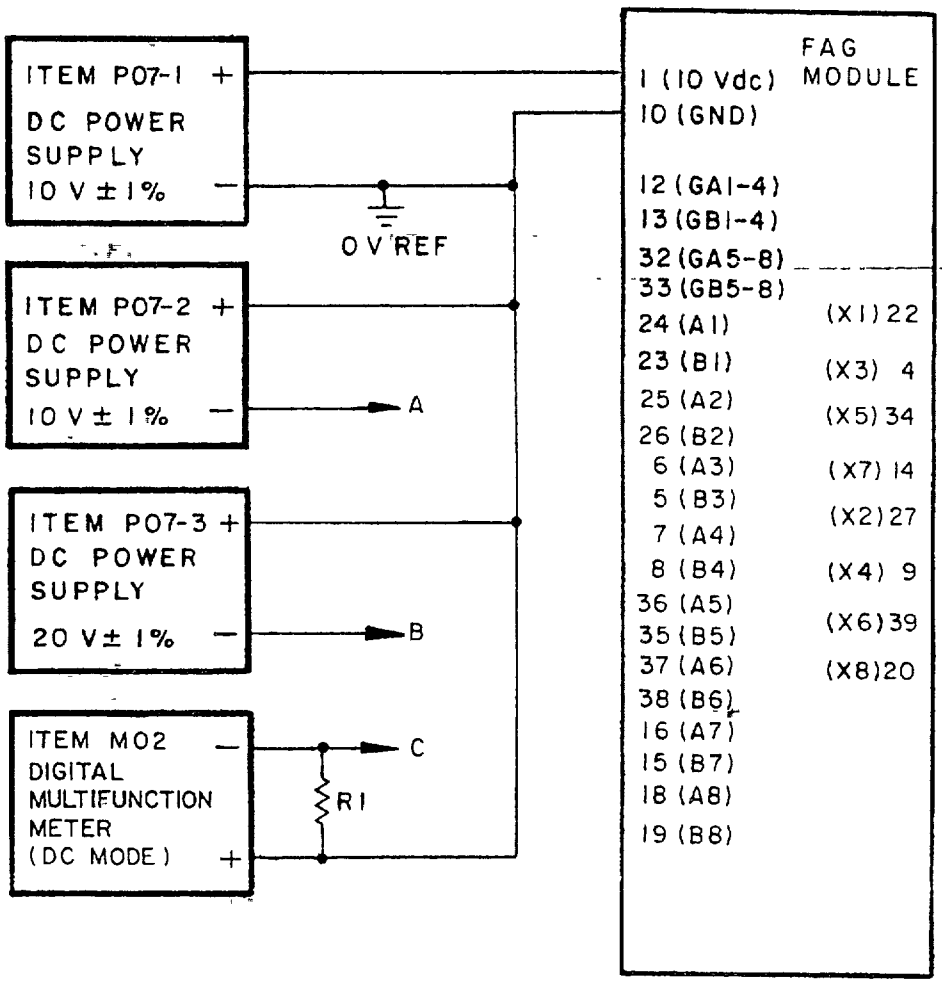

NOTE R1 = 10 kΩ ±1%, 1/8 W.

FIGURE 6 ON resistance check test circuit for test conditions C1-C16, table IV


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:05Z
Check the source to verify that this is the current version before use.

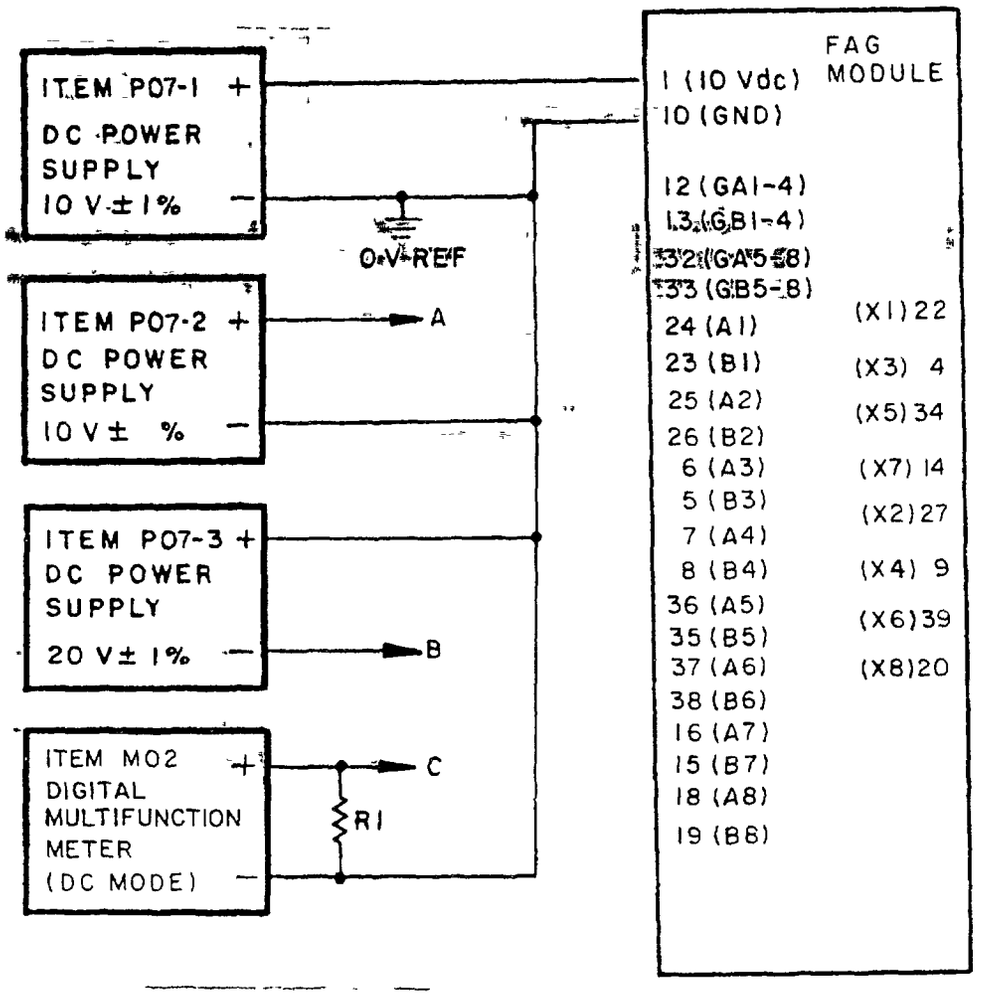

NOTE: R1 = 10 kΩ ±1%, 1/8 W.

FIGURE 7 ON resistance check test circuit for test conditions C17-C32, table IV.


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:05Z
Check the source to verify that this is the current version before use.

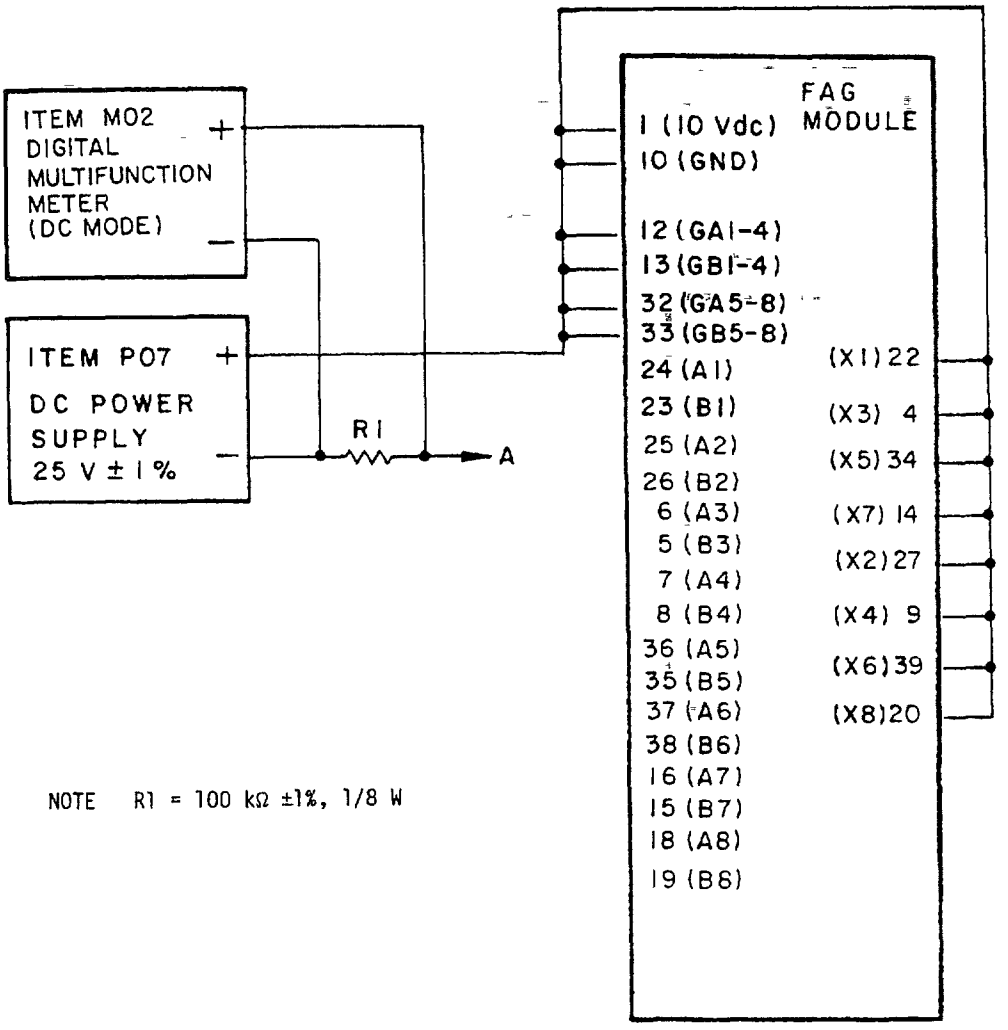

NOTE R1 = 100 kΩ ±1%, 1/8 W

FIGURE 9. Analog input leakage current check test circuit for table VI


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:05Z
Check the source to verify that this is the current version before use.

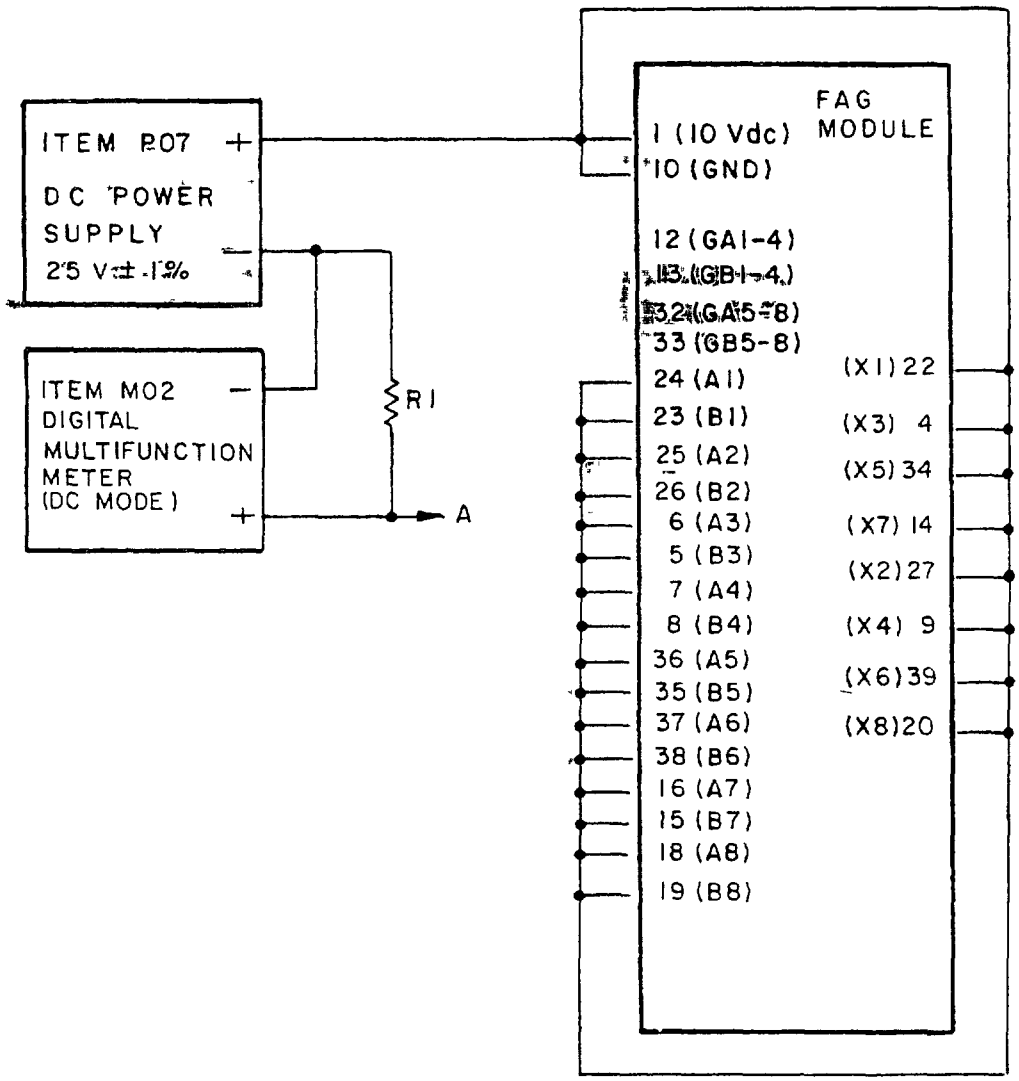

NOTE: R1 = 100 kΩ ±1%, 1/8 W.

FIGURE 10. Gate input leakage current check test circuit for table VII

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:05Z
Check the source to verify that this is the current version before use.

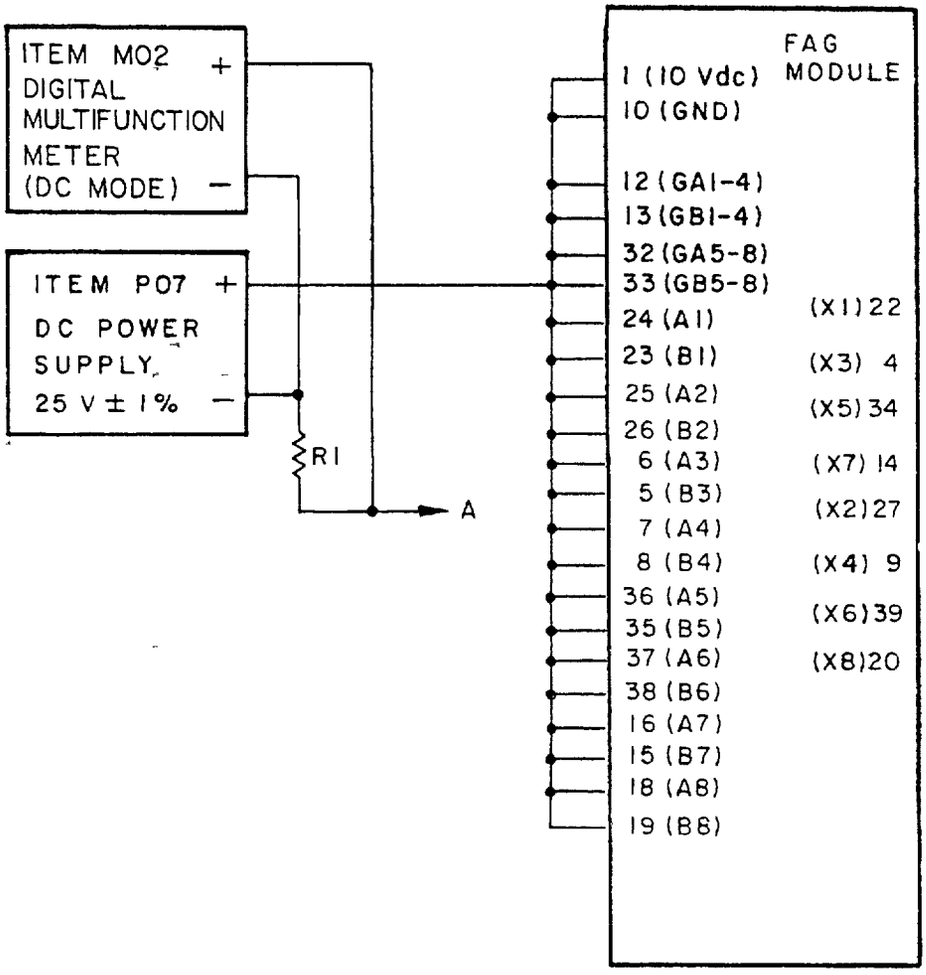

NOTE R1 = 100 kΩ ±1%, 1/8 W.

FIGURE 11 Output leakage current check test circuit for table VIII.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:05Z
Check the source to verify that this is the current version before use.