MILITARY SPECIFICATION

MODULES, STANDARD ELECTRONIC

GATE, NAND, DIGITAL, KEY CODE BDA

This amendment forms a part of Military Specification MIL-M-28787/114A(EC), dated 22 December 1981, and is approved for use by the Naval Electronic Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

PAGE 6

6.3, delete and substitute the following:

"6.3 Cross reference of classification. Military specification MIL-M-28787/114 supersedes Department of the Navy, Naval Ordnance Systems Command Drawing No. 10001-2658634. Part number M28787/114-1 supersedes part numbers 2658634 and M28787/114."

PAGE 8

* FIGURE 2: Delete and substitute new figure 2 as printed on page 2 of this amendment.

PAGE 12

TABLE III, test condition B6, E to pin column: Add "19" in column.

PAGE 13

FIGURE 5: Delete and substitute new figure 5 as printed on page 3 of this amendment.

PAGE 16

FIGURE 6: Delete and substitute new figure 6 as printed on page 4 of this amendment.

PAGE 21

FIGURE 8: Delete and substitute new figure 8 as printed on page 5 of this amendment.

NOTE: The margin of this amendment is marked with an asterisk to indicate where changes from the previous amendment were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous amendment.


Agent:
DLA - ES

Preparing activity:
Navy - EC

(Project 5963-N614)

FSC 5963

Source: https://assist.dla.mil -- Downloaded: 202640-20T16:05Z
Check the source to verify that this is the current version before use.

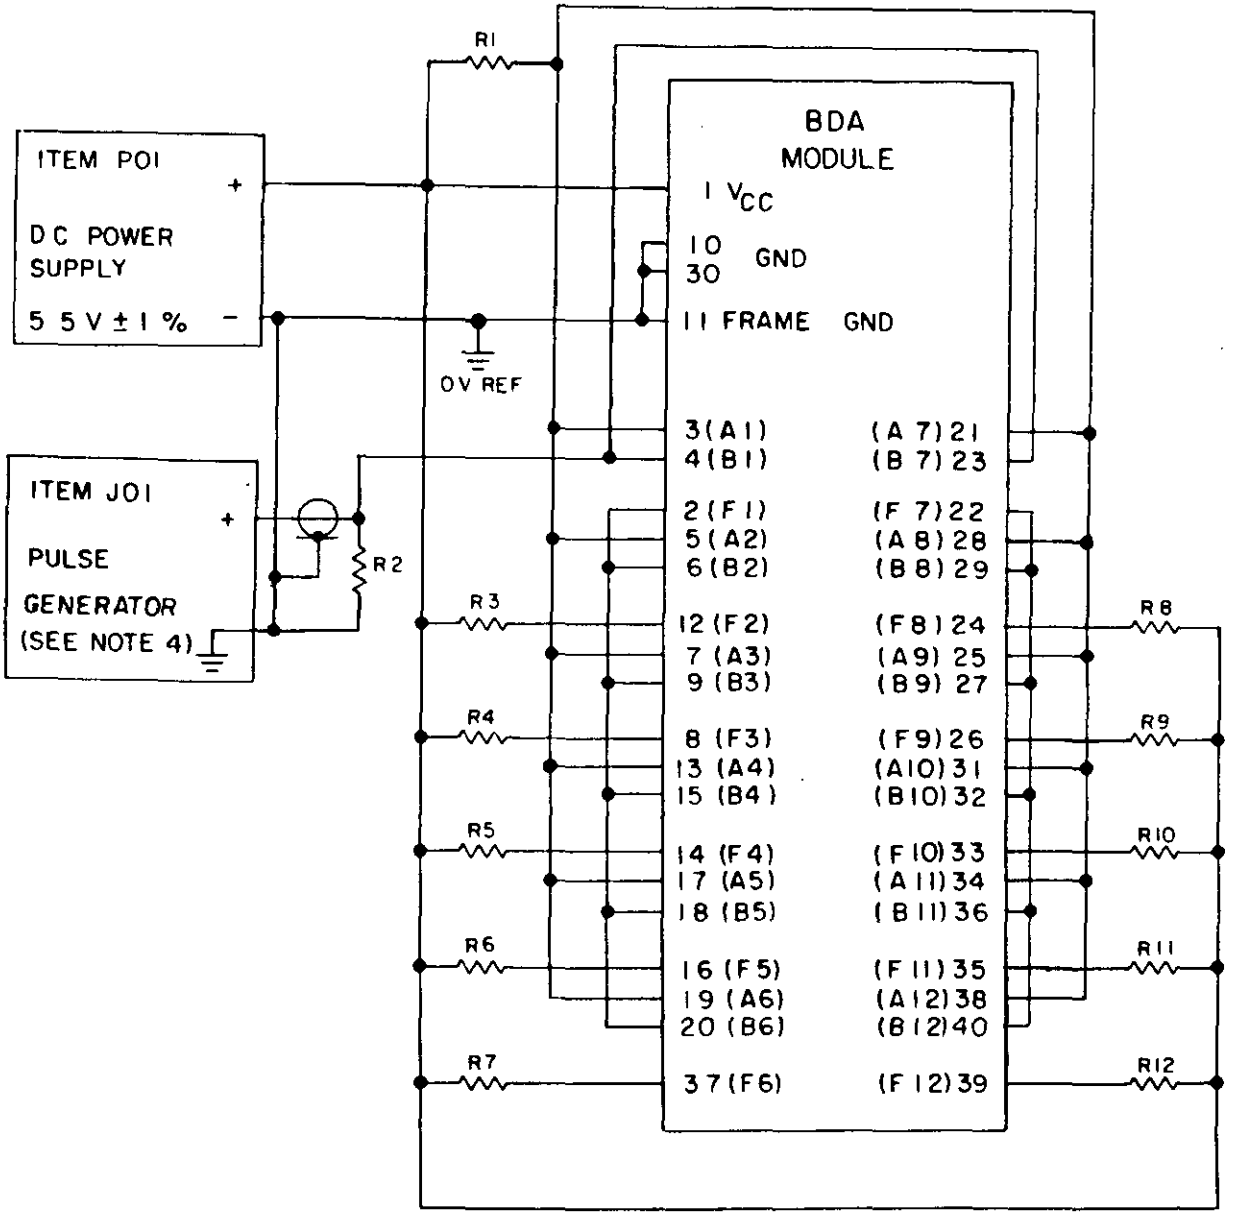

NOTES:
1. R1 = 1 kΩ ±1%, 1/8 W.
2. R2 = 50Ω ±5%, 1/2 W.
3. R3-R12 = 422Ω ±1%, 1/8 W.
4. Input pulse parameters:
   Pulse width(PW) = 500 ±50 ns.
   PRP = 1,000 ±100 ns.
   Pulse amplitude = 3.0 ±0.1 V.
   $t_{TLH} = t_{THL}$ = 20 ±2 ns.

FIGURE 2. Operating temperature and life test circuit.

Source: https://assist.dla.mil -- Downloaded: 202610-20T16:05Z
Check the source to verify that this is the current version before use.


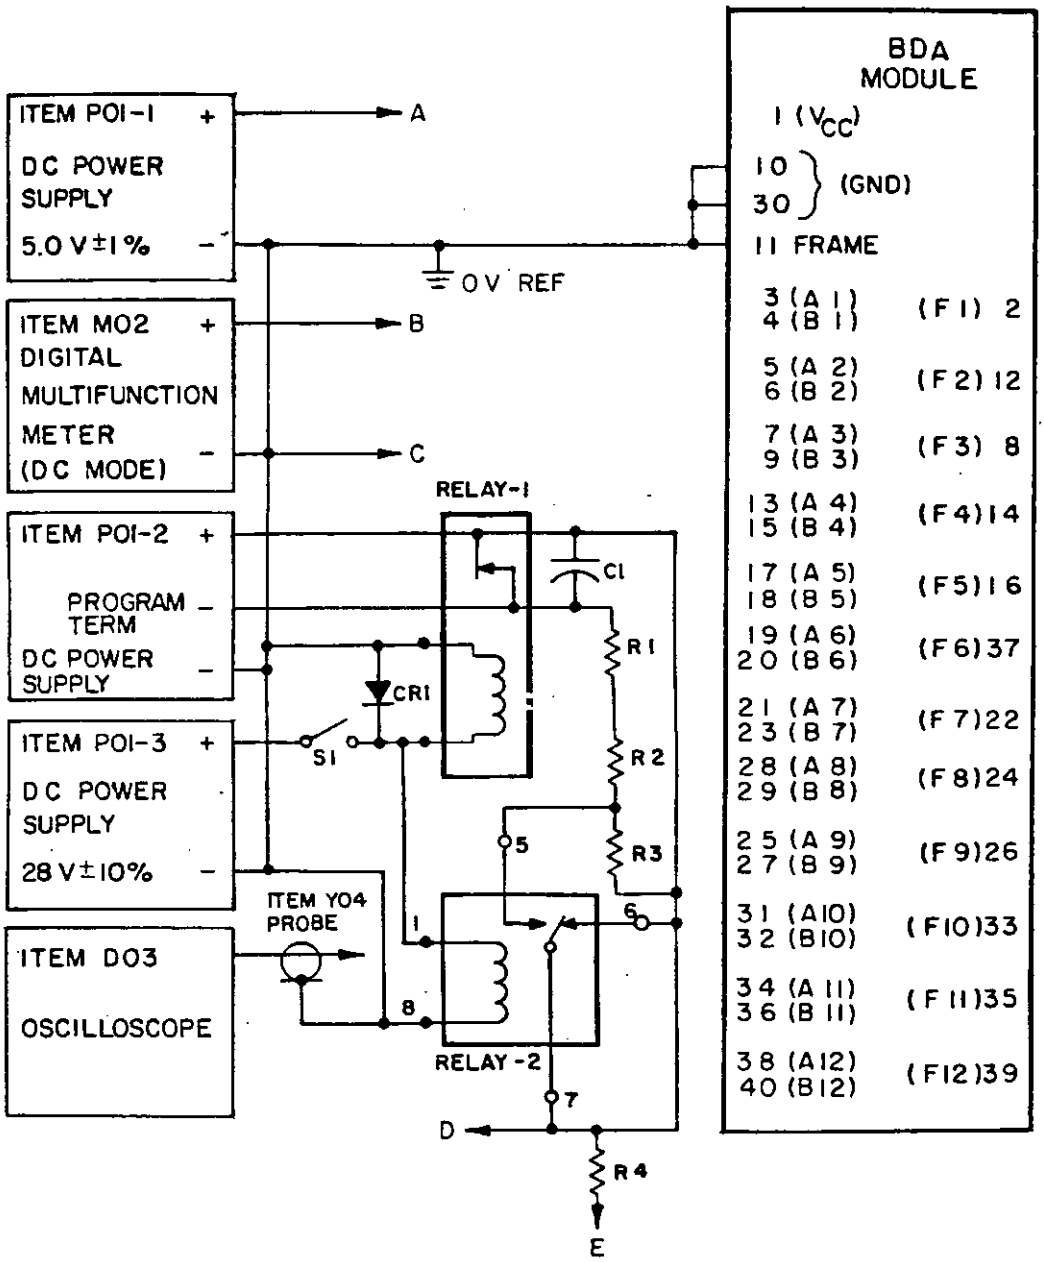


FIGURE 5. Zener applied potential test circuit for table III.


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:05Z
Check the source to verify that this is the current version before use.

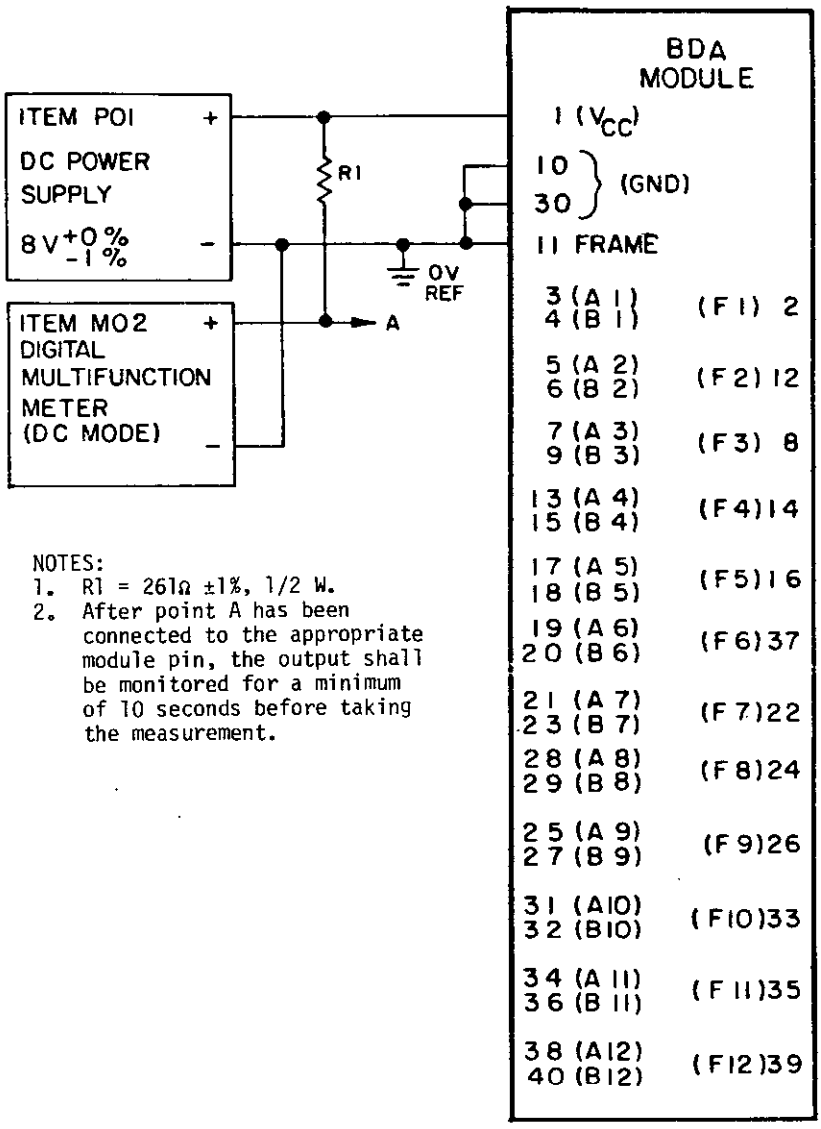

NOTES:
1. R1 = 261Ω ±1%, 1/2 W.
2. After point A has been connected to the appropriate module pin, the output shall be monitored for a minimum of 10 seconds before taking the measurement.

FIGURE 6. V_{OUT} (low loaded) test circuit for table IV.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:05Z
Check the source to verify that this is the current version before use.

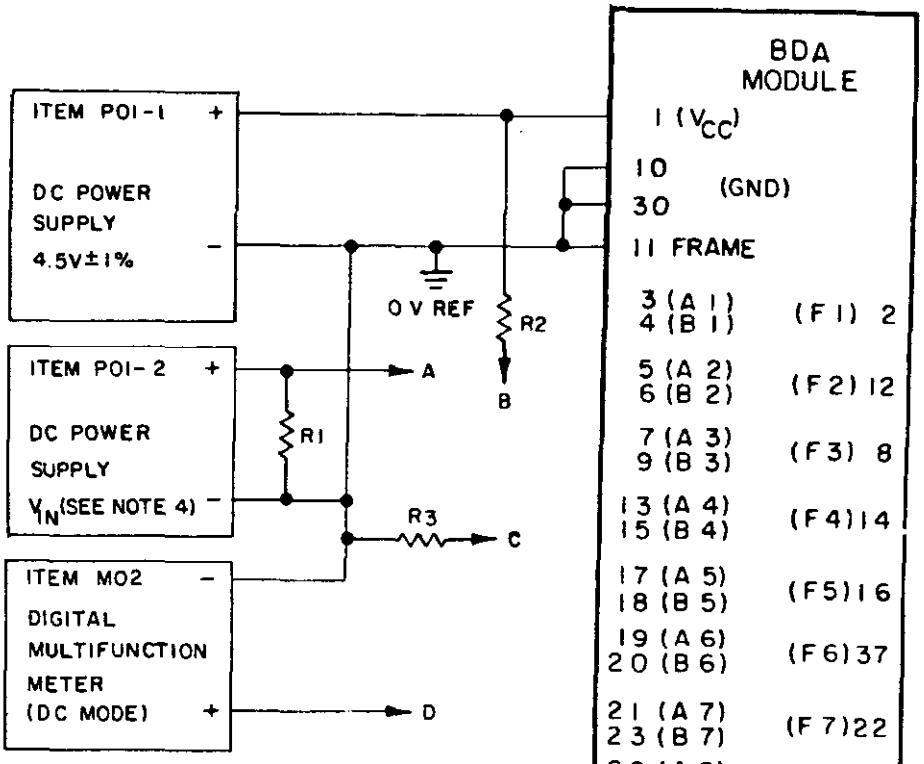

NOTES:
1. R1 = 127Ω ±1%, 1/8 W.
2. R2 = 348Ω ±1%, 1/8 W.
3. R3 = 61.9Ω ±1%, 1/8 W.
4. Use appropriate V_{IN} for specified test condition and temperature listed below:

Test condition	Temperature (°C)	V_{IN} (volts)
E1-E24	0	1.20
	25	1.10
	60	0.95
	80	0.80
F1-F12	0	2.0
	25	1.9
	60	1.8
	80	1.8

0°, 60°, and 80°C refer to operating temperatures (module fin); 25°C refers to ambient temperature. For 80°C use the 0° to 60°C end-of-life limits.

FIGURE 8. Output voltage (high-level and low-level) test circuit for table VI.

☆ U.S. GOVERNMENT PRINTING OFFICE: 1984—705—040/A3217

Source: https://assist.dla.mil -- Downloaded: 202610-20T16:05Z
Check the source to verify that this is the current version before use.