INCH-POUND

MIL-M-28787/114A
AMENDMENT 3
31 December 1992
SUPERSEDING
AMENDMENT 2
4 June 1984

*MILITARY SPECIFICATION

*MODULES, STANDARD ELECTRONIC

GATE, NAND, DIGITAL, KEY CODE BDA

This amendment forms a part of Military Specification MIL-M-28787/114A(EC), dated 22 December 1981, and is approved for use by all Departments and Agencies of the Department of Defense.

PAGE 4

*TABLE I, Test condition G, Test type column: Delete "X" and substitute "S".

PAGE 6

*4.4.2: Delete and substitute the following:

"4.4.2 Order of testing. Test conditions A through S shall be performed in any order with the following exceptions. Test conditions A, B, C, D1, and G are stress tests and shall be performed only at 25 ± 5°C. If test conditions A, B, C, D1, or G are part of a sequence of tests, the order of testing shall be as follows: D1, A, B, C, and G where applicable, followed by the remaining tests in the sequence."

*4.5.1, line 5: Delete "E through J" and substitute "E, F, H, J,".

*4.5.3, line 3: Delete "E through J" and substitute "E, F, H, J,".

*4.5.3, line 6: Delete "E through S" and substitute "E, F, and H through S".

6.3: Delete and substitute the following.

"6.3 Cross reference of classification. Military specification MIL-M-28787/114 supersedes Department of the Navy, Naval Ordnance Systems Command Drawing No. 10001-2658634. Part number M28787/114-1 supersedes part numbers 2658634 and M28787/114 "

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:05Z
Check the source to verify that this is the current version before use.

PAGE 8

FIGURE 2: Delete and substitute new figure 2 as printed on page 3 of this amendment.

PAGE 12

TABLE III, Test condition B6, E to pin column: Add "19" in column.

PAGE 13

FIGURE 5: Delete and substitute new figure 5 as printed on page 4 of this amendment.

PAGE 16

FIGURE 6: Delete and substitute new figure 6 as printed on page 5 of this amendment.

PAGE 21

FIGURE 8: Delete and substitute new figure 8 as printed on page 6 of this amendment.

NOTE: The margins of this amendment are marked with an asterisk or vertical lines to indicate where changes (additions, modifications, corrections, deletions) from the previous amendment were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous amendment.


Custodians:
Army - ER
Navy - SH
Air Force - 85

Preparing activity:
Navy - NW

(Project 5963-0128)

Review activities:
Army - AT
Navy - AS, MC
Air Force - 13, 19
DLA - ES

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:05Z
Check the source to verify that this is the current version before use.

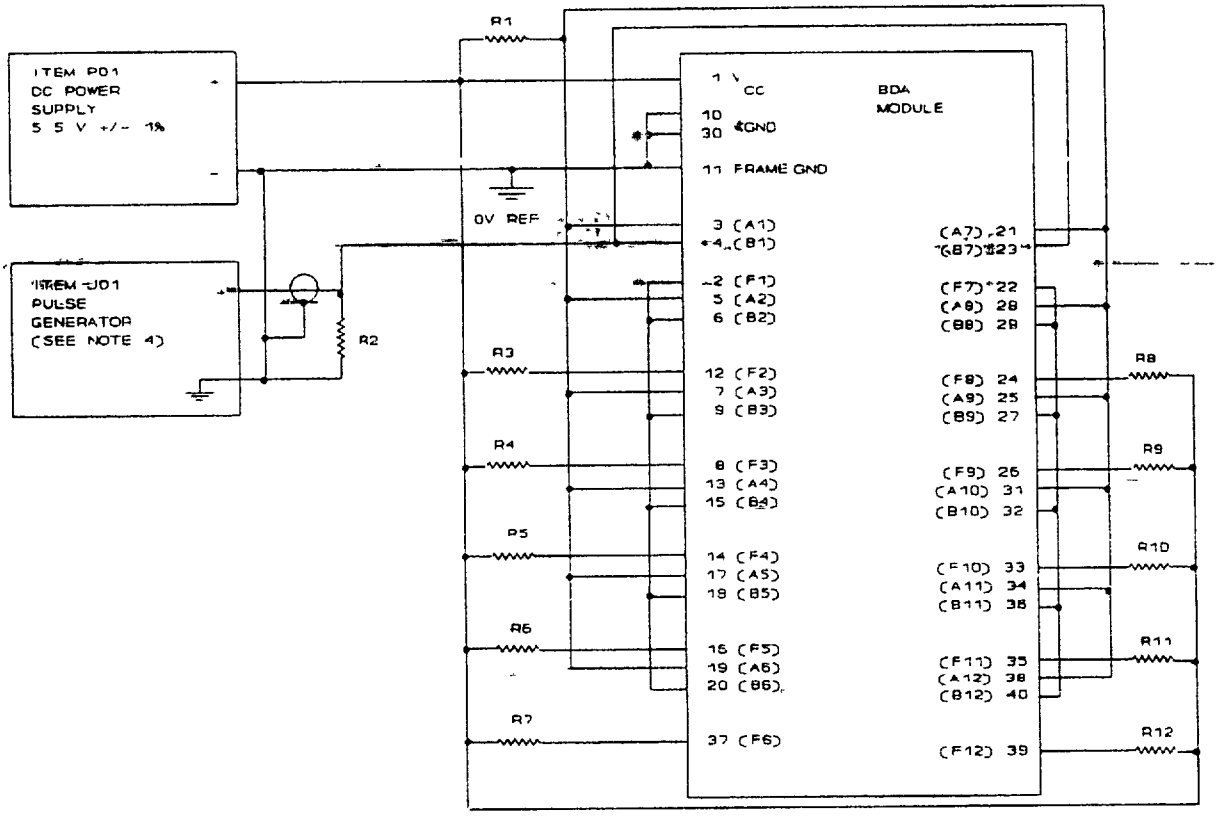

NOTES:

1. R1 = 1 kΩ ± 1%, 1/8W.
2. R2 = 50Ω ± 5%, 1/2W.
3. R3-R12 = 422Ω ± 1%, 1/8W.
4. Input pulse parameters: Pulse width (PW) = 500 ± 50 ns.
   PRP = 1,000 ± 100 ns.
   Pulse amplitude = 3.0 ± 0.1V.
   $t_{TLH} = t_{THL} = 20 \pm 2$ ns.

FIGURE 2. Operating temperature and life test circuit.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:05Z
Check the source to verify that this is the current version before use.


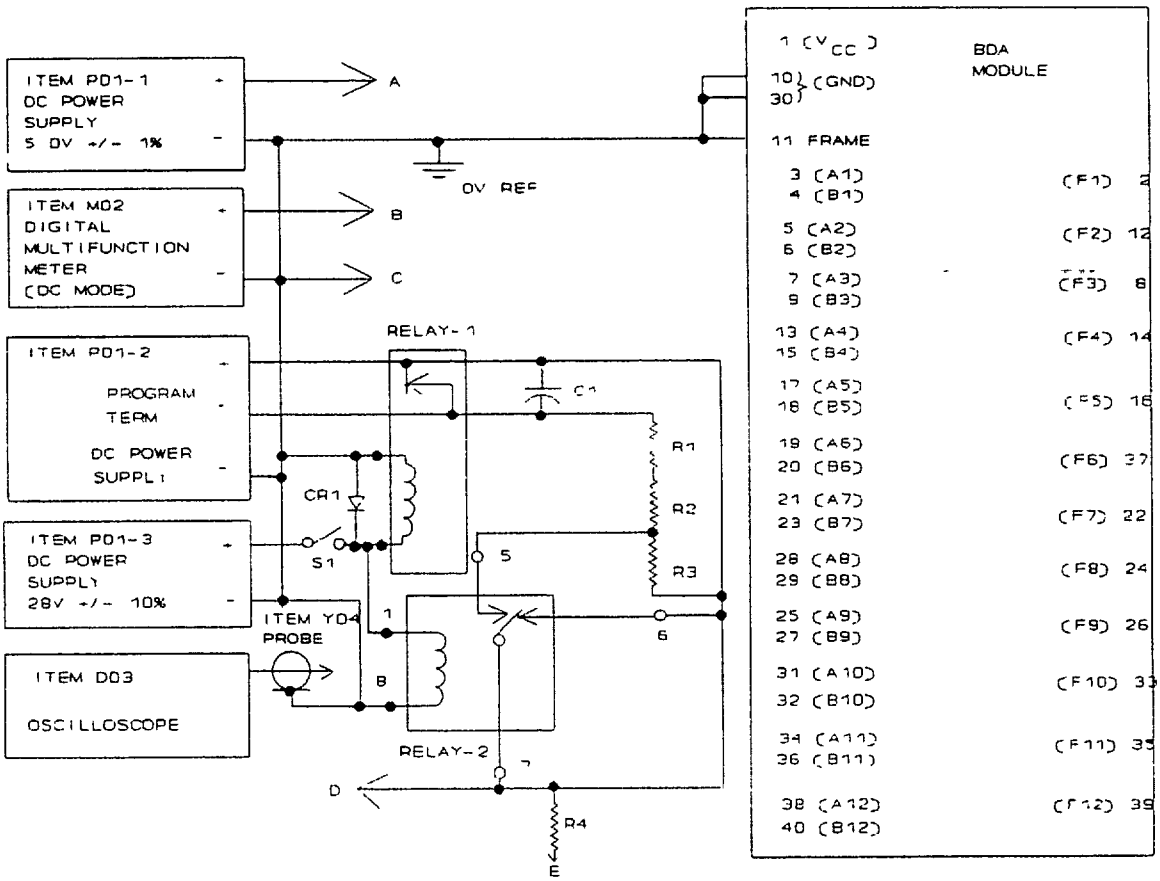


FIGURE 5. Zener applied potential test circuit for table III.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:05Z
Check the source to verify that this is the current version before use.

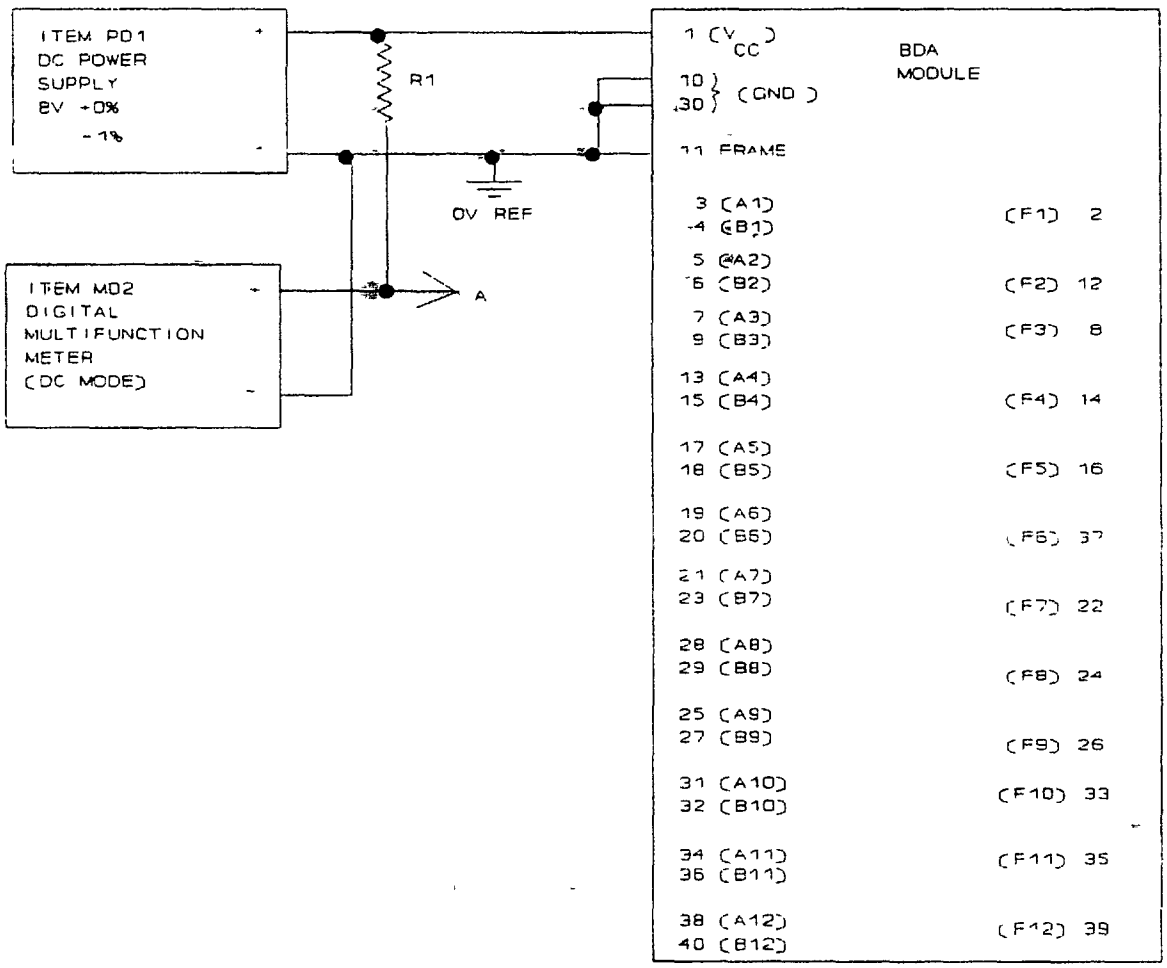


NOTES:

1. R1 = 261Ω ± 1%, 1/2W.
2. After point A has been connected to the appropriate module pin, the output shall be monitored for a minimum of 10 seconds before taking the measurement.

FIGURE 6. V_{OUT} (low loaded) test circuit for table IV.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:05Z
Check the source to verify that this is the current version before use.

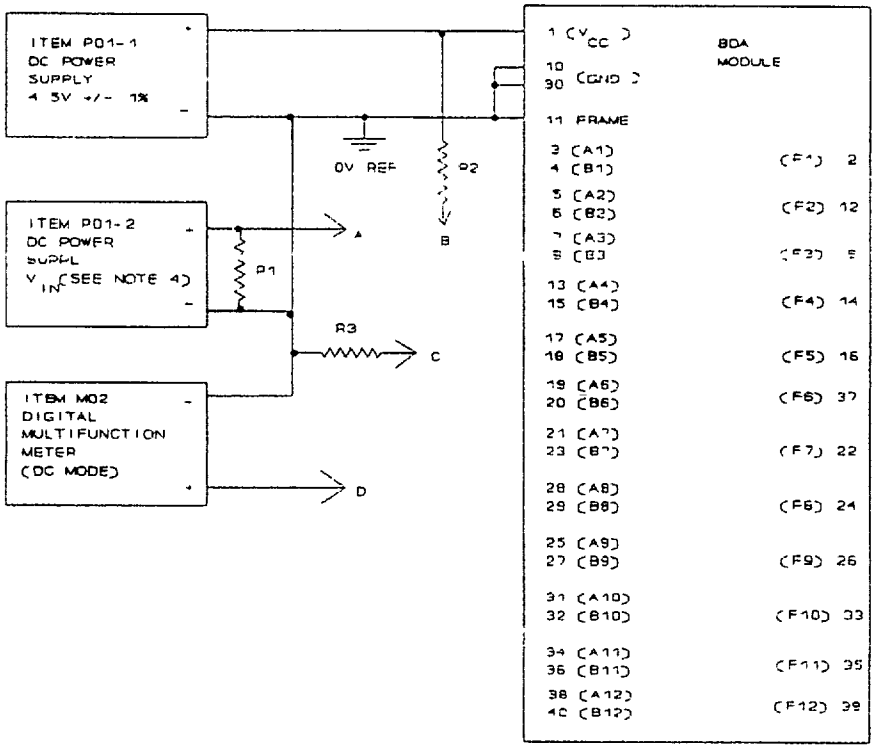

NOTES:

1. R1 = 127Ω ± 1%, 1/8W.
2. R2 = 348Ω ± 1%, 1/8W.
3. R3 = 61.9Ω ± 1%, 1/8W.
4. Use appropriate V_{IN} for specified test condition and temperature listed below:

Test cond	Temperature (°C)	VIN (volts)
E1-E24	0	1.20
	25	1.10
	60	0.95
	80	0.80
F1-F12	0	2.0
	25	1.9
	60	1.8
	80	1.8

0°, 60°, and 80°C refer to operating temperatures (module fin); 25°C refers to ambient temperature. For 80°C use the 0° to 60°C end-of-life limits

FIGURE 8. Output voltage (high-level and low-level) test circuit for table VI

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:05Z
Check the source to verify that this is the current version before use.