MILITARY SPECIFICATION

MODULES, STANDARD ELECTRONIC

MULTIPLEXER, DIGITAL, KEY CODE KHL

This amendment forms a part of Military Specification MIL-M-28787/81A(EC), dated 29 June 1979, and is approved for use by the Naval Electronic Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

PAGE 11

4.3, delete and substitute the following:

"4.3 Test equipment. Test equipment specified on figures and in tables with a type designator shall be as specified in MIL-STD-1665. Other equipment and components shall be as specified on the figures. All resistors shall be metal film and all capacitors shall be ceramic unless otherwise specified."

PAGE 20

FIGURE 7: Delete and substitute new figure 7 as printed on page 2 of this amendment.

PAGE 39

TABLE VIII, note 2, second line: Delete "voltmeter (V03)" and substitute "item M02".

PAGE 40

FIGURE 11: Delete and substitute new figure 11 as printed on page 3 of this amendment.

PAGE 43

FIGURE 12: Delete and substitute new figure 12 as printed on page 4 of this amendment.

PAGE 46

FIGURE 13: Delete and substitute new figure 13 as printed on page 5 of this amendment.


Agent:
DLA - ES

Preparing activity:
Navy - EC

(Project 5963-N577)

Source: https://assist.dla.mil - Downloaded: 2026-10-20T15:58Z
Check the source to verify that this is the current version before use.


FSC 5963

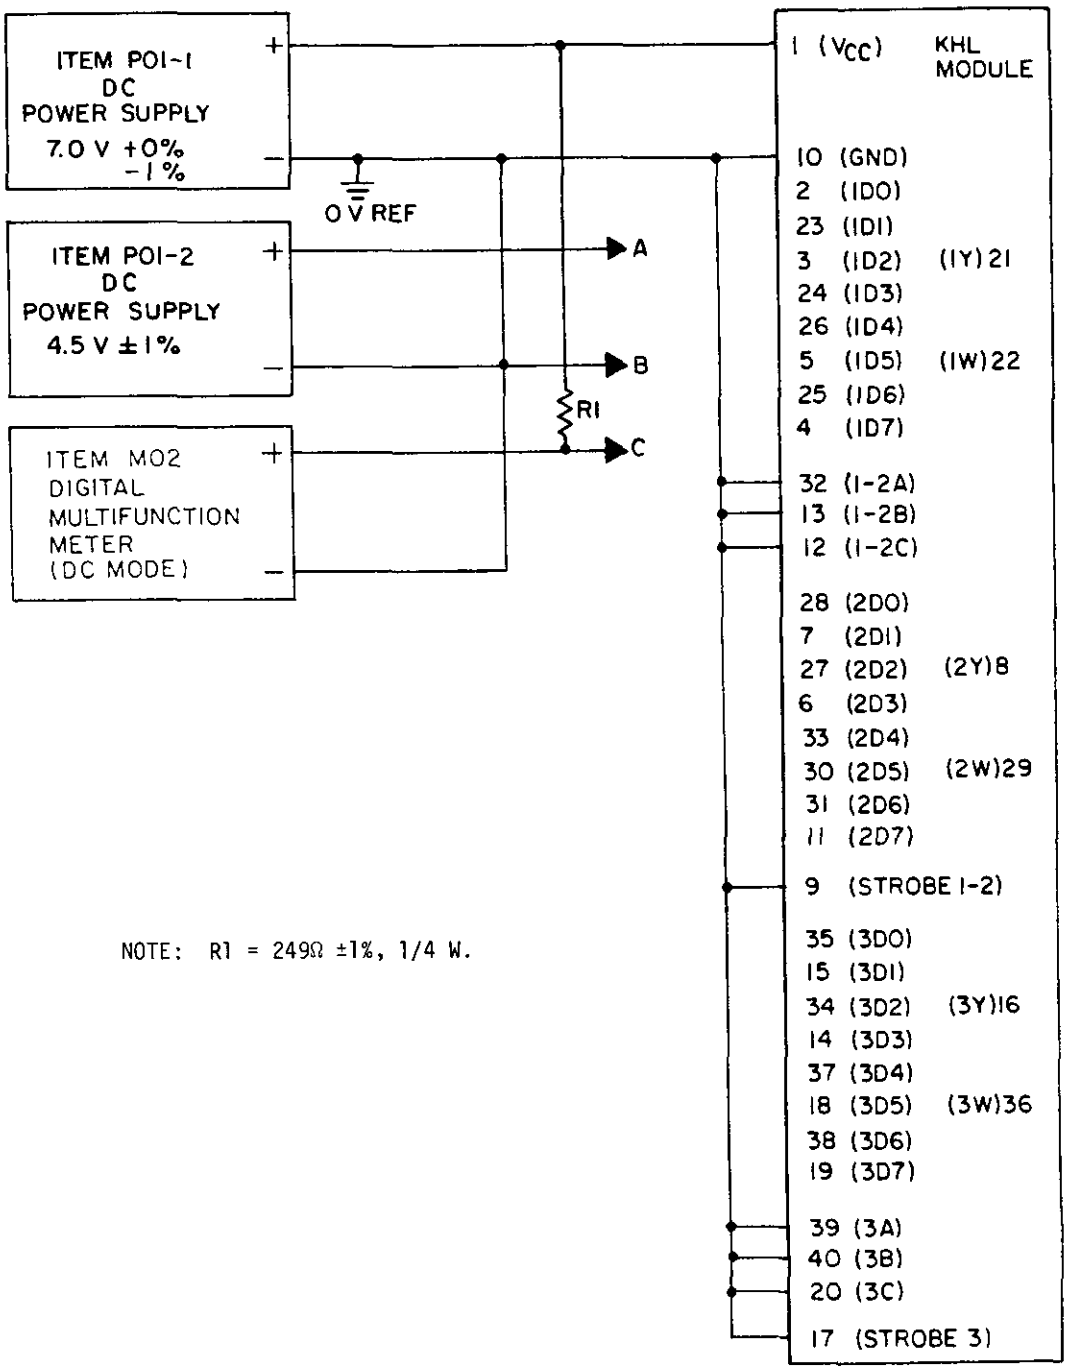

NOTE: R1 = 249Ω ±1%, 1/4 W.

FIGURE 7. V_{OUT} (low-loaded) test circuit for table IV.


Source: https://assist.dla.mil - Downloaded: 2026-10-20T15:58Z
Check the source to verify that this is the current version before use.

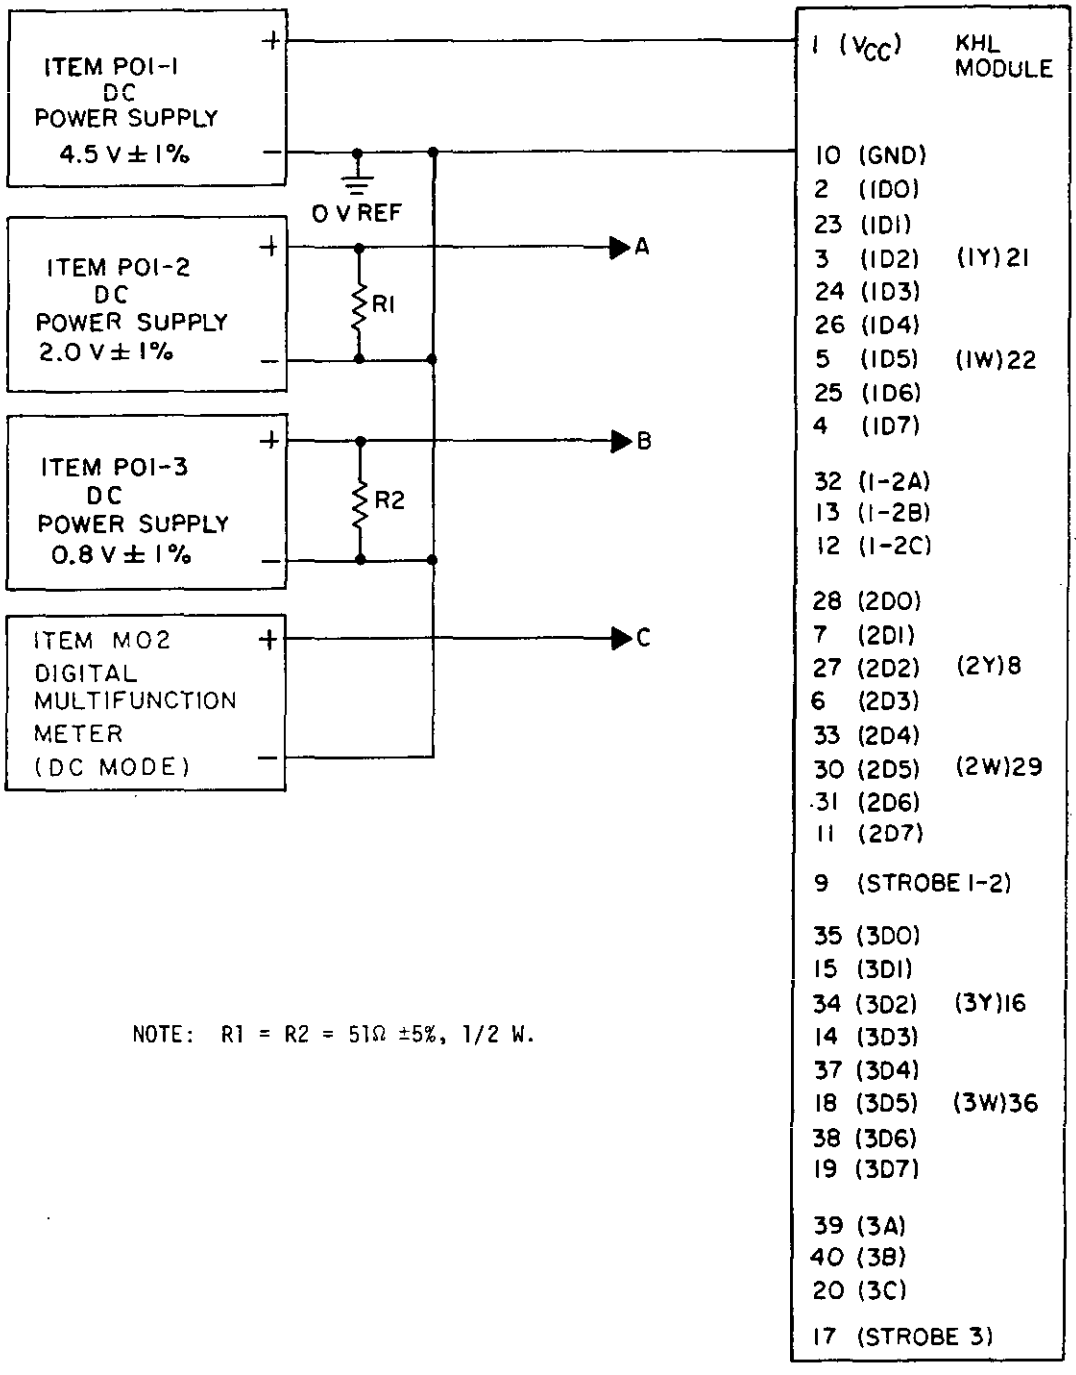

NOTE: R1 = R2 = 51Ω ±5%, 1/2 W.

FIGURE 11. Functional test circuit for table VIII.


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T15:58Z
Check the source to verify that this is the current version before use.

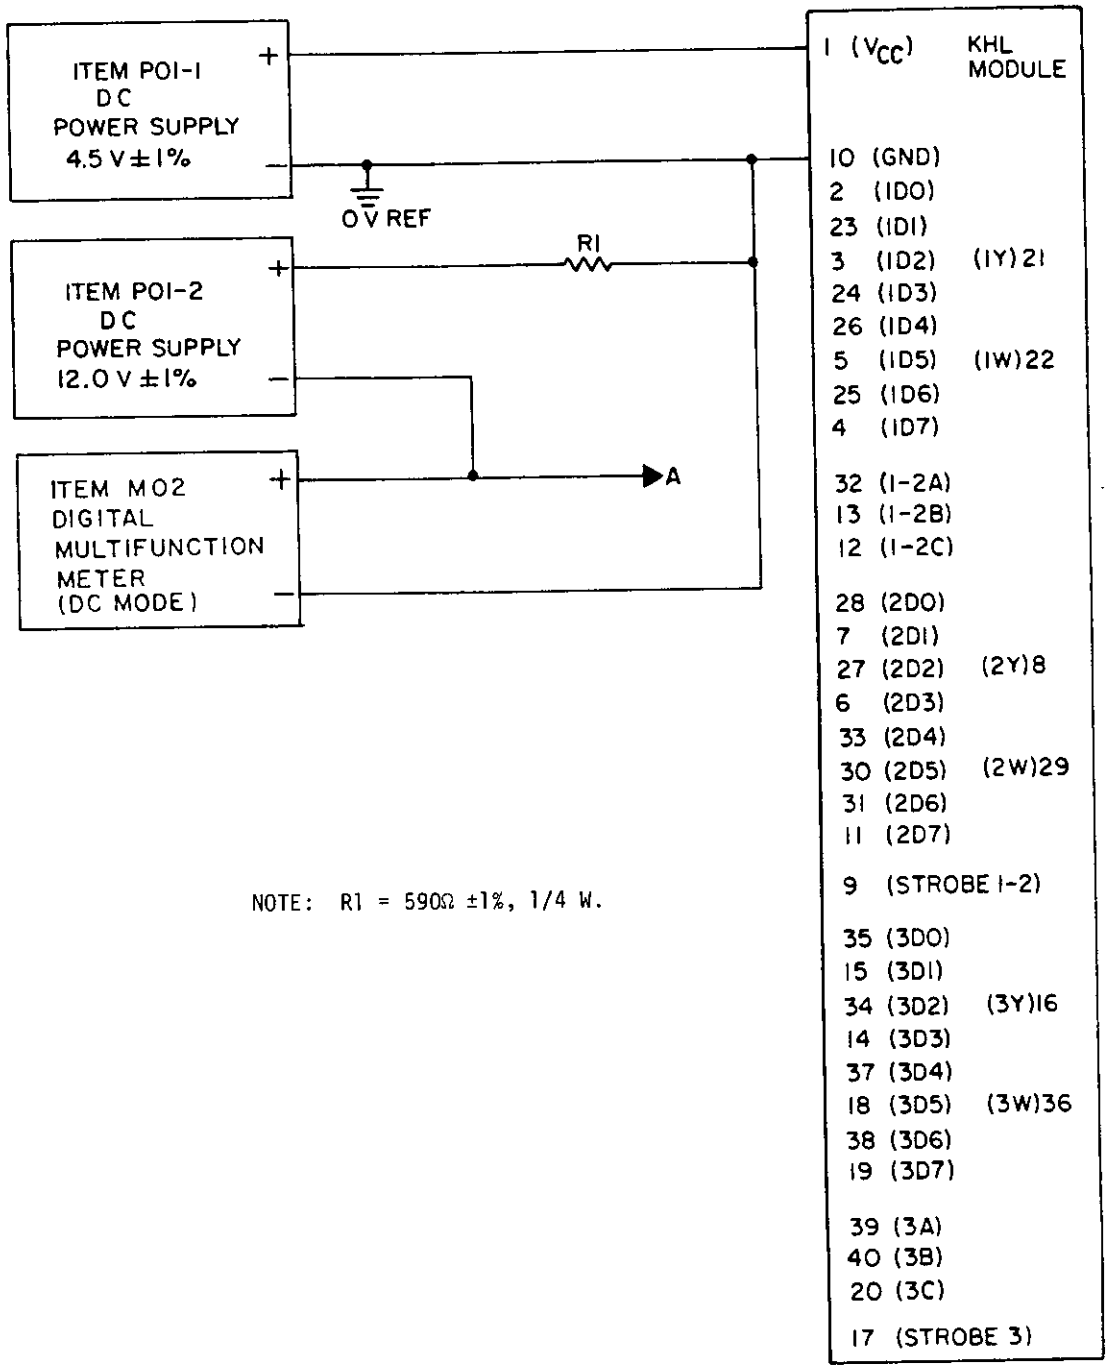

NOTE: R1 = 590Ω ±1%, 1/4 W.

FIGURE 12. Input clamp diode voltage test circuit for table IX.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T15:58Z
Check the source to verify that this is the current version before use.

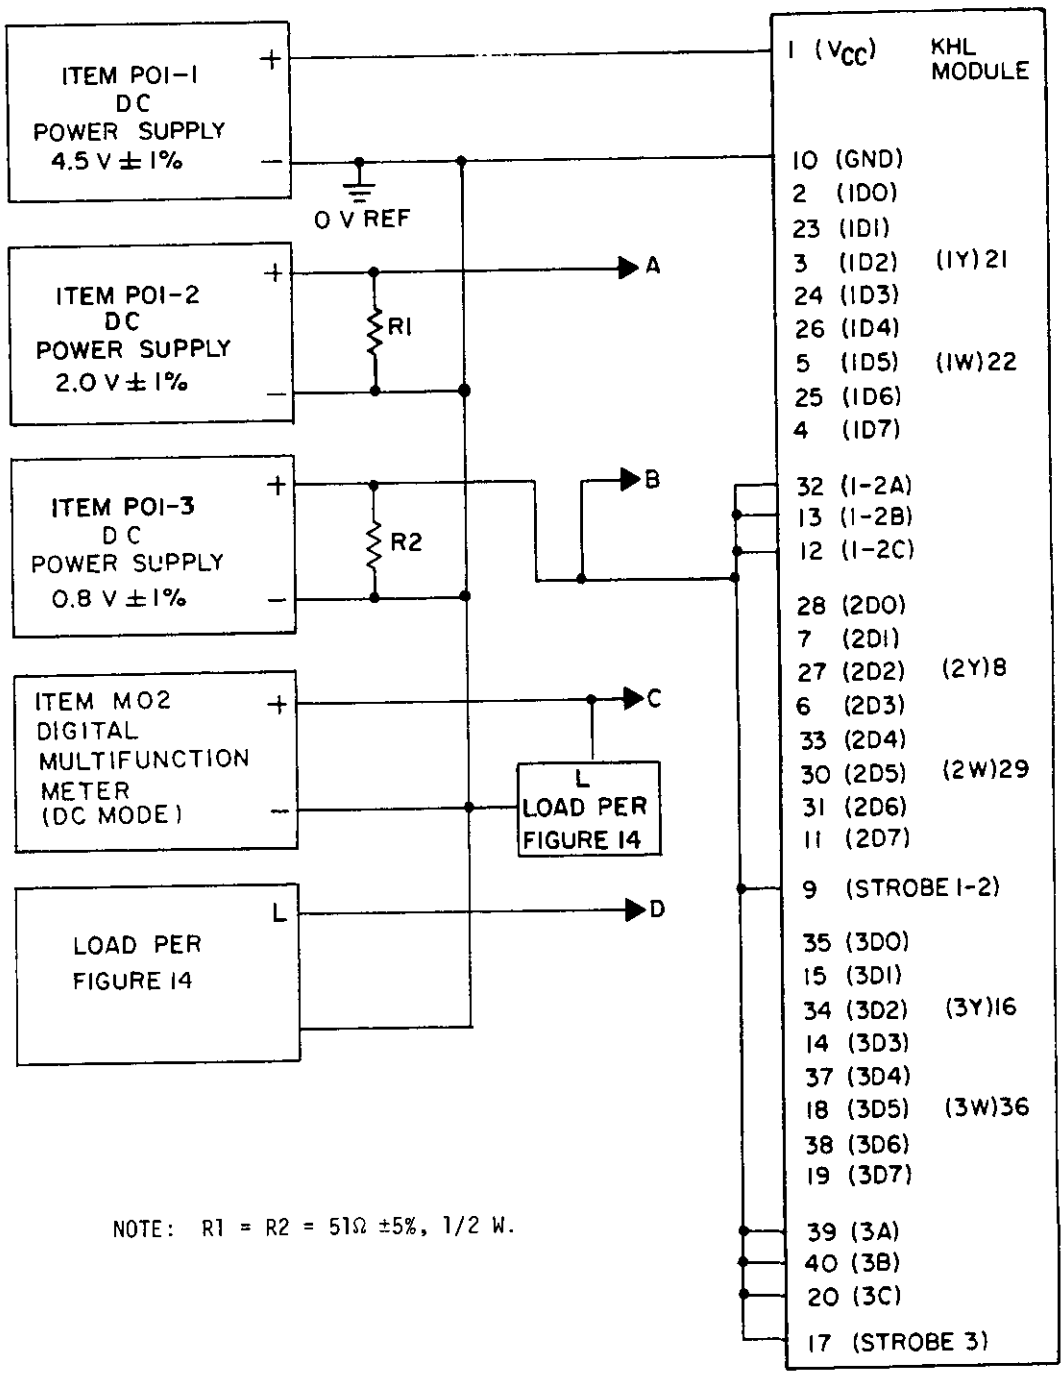

NOTE: R1 = R2 = 51Ω ±5%, 1/2 W.

FIGURE 13. Static output voltage (low-level and high-level) test circuit for tables X and XI.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T15:58Z
Check the source to verify that this is the current version before use.