INCH-POUND

MIL-M-28787/81A(SH)
AMENDMENT 2
30 March 1992
SUPERSEDING
AMENDMENT 1
14 November 1983

MILITARY SPECIFICATION

MODULES, STANDARD ELECTRONIC

MULTIPLEXER, DIGITAL, KEY CODE KHL

This amendment forms a part of Military Specification MIL-M-28787/81A(EC), dated 29 June 1979, and is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense

PAGE 7

* TABLE II, Test conditions E1-E6 and G1-G32, Test type column Delete "X" and substitute "S"

PAGE 10

* TABLE II, Test conditions W1-W28, Max columns· Delete "15 0" (four places) and substitute "18 0" (four places)

DISTRIBUTION STATEMENT A Approved for public release, distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026l0-20T15:58Z
Check the source to verify that this is the currentversion before use.

PAGE 11

4 3 Delete and substitute the following

"4.3 Test equipment Test equipment specified on figures and in tables with a type designator shall be as specified in MIL-STD-1665 Other equipment and components shall be as specified on the figures. Unless otherwise specified, all resistors shall be metal film and all capacitors shall be ceramic "

* 4 4 2 Delete and substitute the following

"4 4.2 Order of testing Test conditions A through W shall be performed in any order with the following exceptions Test conditions A, B, C, E, and G are stress tests and shall be performed only at 25 ± 5°C If test conditions A, B, C, E, or G are part of a sequence of tests, the order of testing shall be as follows A, B, C, E, and G where applicable, followed by the remaining tests in the sequence "

PAGE 12

* 4 5 1, fifth line Delete "D through V" and substitute "D, F, H through R and V"

* 4 5 3, third line Delete "D through V" and substitute "D, F, H through R and V"

* 4 5.3, fifth and sixth lines Delete "D through W" and substitute "D, F, H through R and V"

PAGE 20

FIGURE 7 Delete and substitute new figure 7 as printed on page 4 of this amendment

PAGE 39

TABLE VIII, note 2, second line. Delete "voltmeter (V03)" and substitute "item M02".

PAGE 40

FIGURE 11 Delete and substitute new figure 11 as printed on page 5 of this amendment

Source: https://assist.dla.mil -- Downloaded: 202610-20T15:58Z
Check the source to verify that this is the current version before use.

PAGE 43

FIGURE 12. Delete and substitute new figure 12 as printed on page 6 of this amendment

PAGE 46

FIGURE 13 Delete and substitute new figure 13 as printed on page 7 of this amendment.

PAGES 86 AND 87

* TABLE XIX, Initial limits, Max column. Delete "15.0" (four places) and substitute "18.0" (four places)


NOTE The margins of this amendment are marked with an asterisk or vertical lines to indicate where changes (additions, modifications, corrections, deletions) from the previous amendment were made This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous amendment

Preparing activity:
Navy - SH

(Project 5963-N817)

Agent NW


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T15:58Z
Check the source to verify that this is the current version before use.

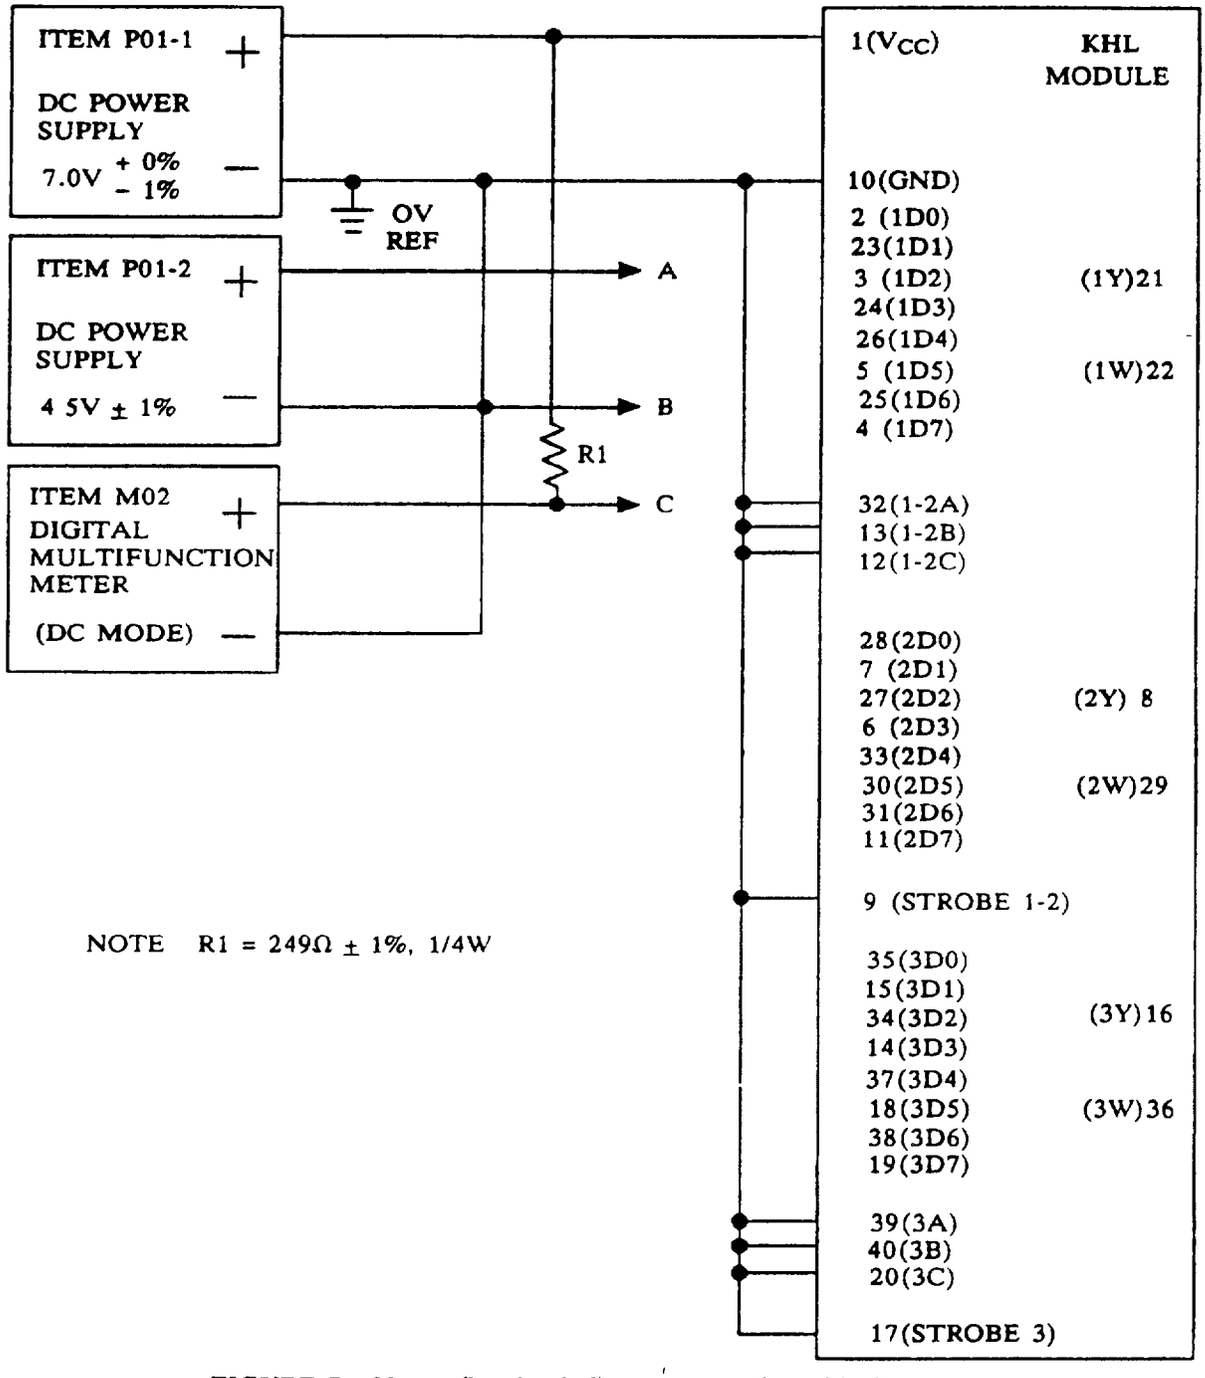

NOTE R1 = 249Ω ± 1%, 1/4W

FIGURE 7 V_{OUT} (low-loaded) test circuit for table IV


Source: https://assist.dla.mil -- Downloaded: 202610-20T15:58Z
Check the source to verify that this is the current version before use.

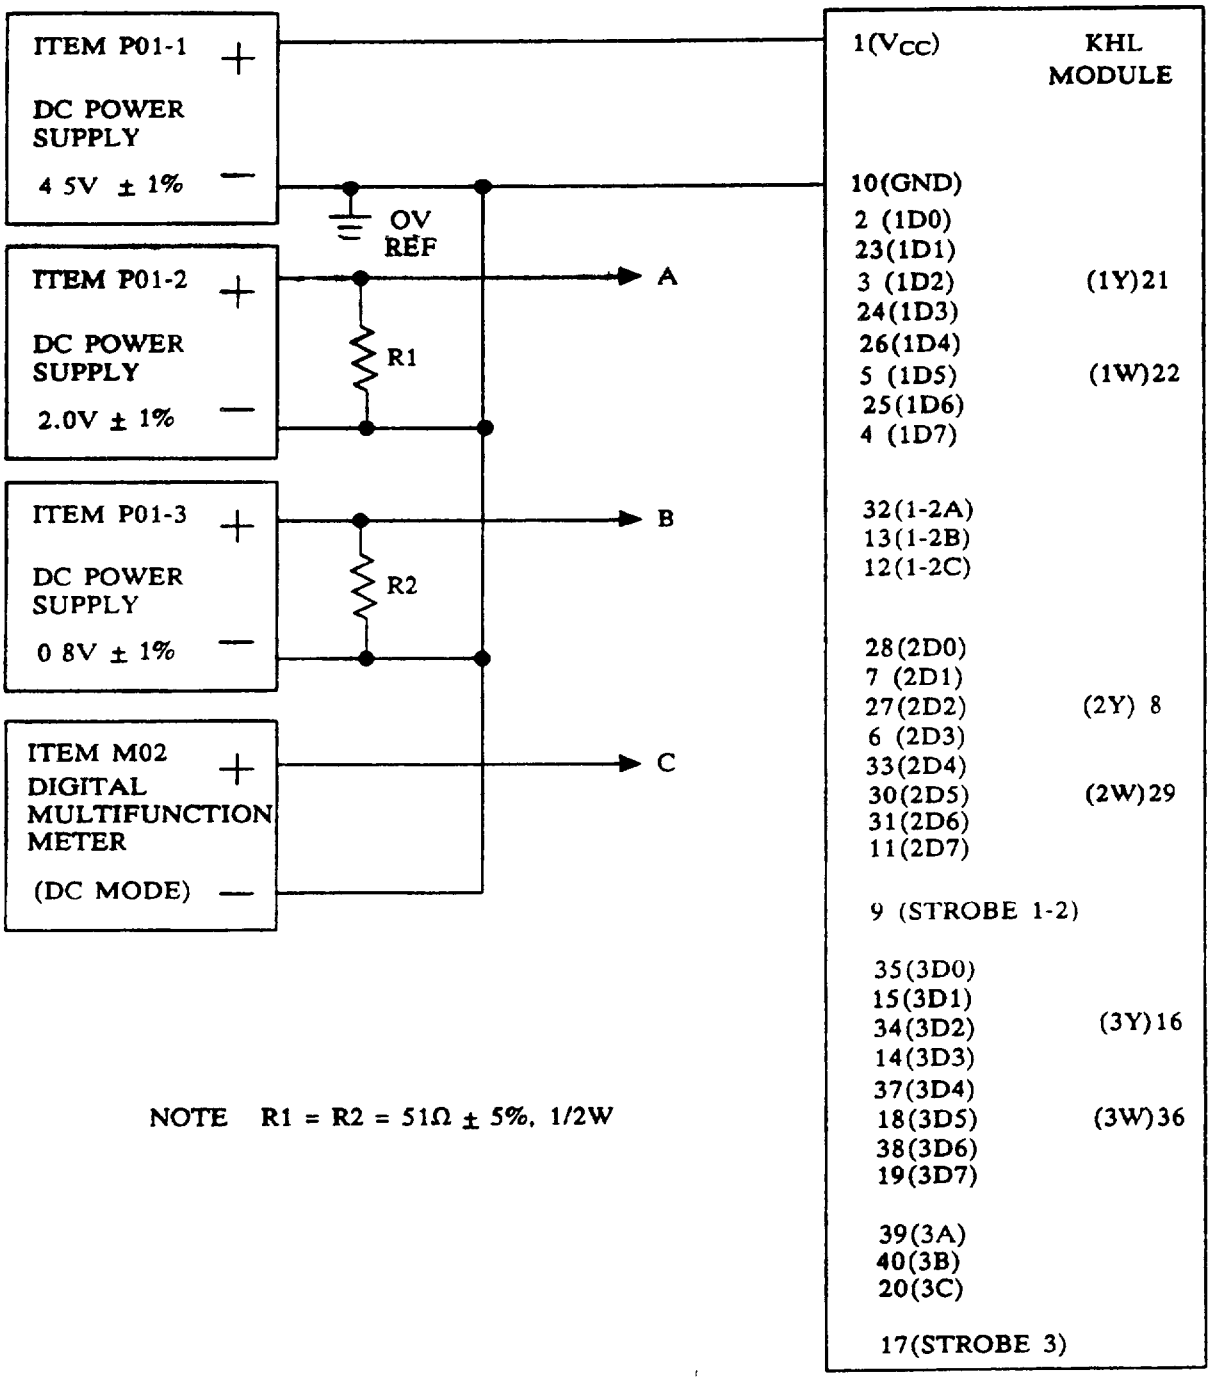

NOTE R1 = R2 = 51Ω ± 5%, 1/2W

FIGURE 11. Functional test circuit for table VIII

Source: https://assist.dla.mil -- Downloaded: 202610-20T15:58Z
Check the source to verify that this is the current version before use.

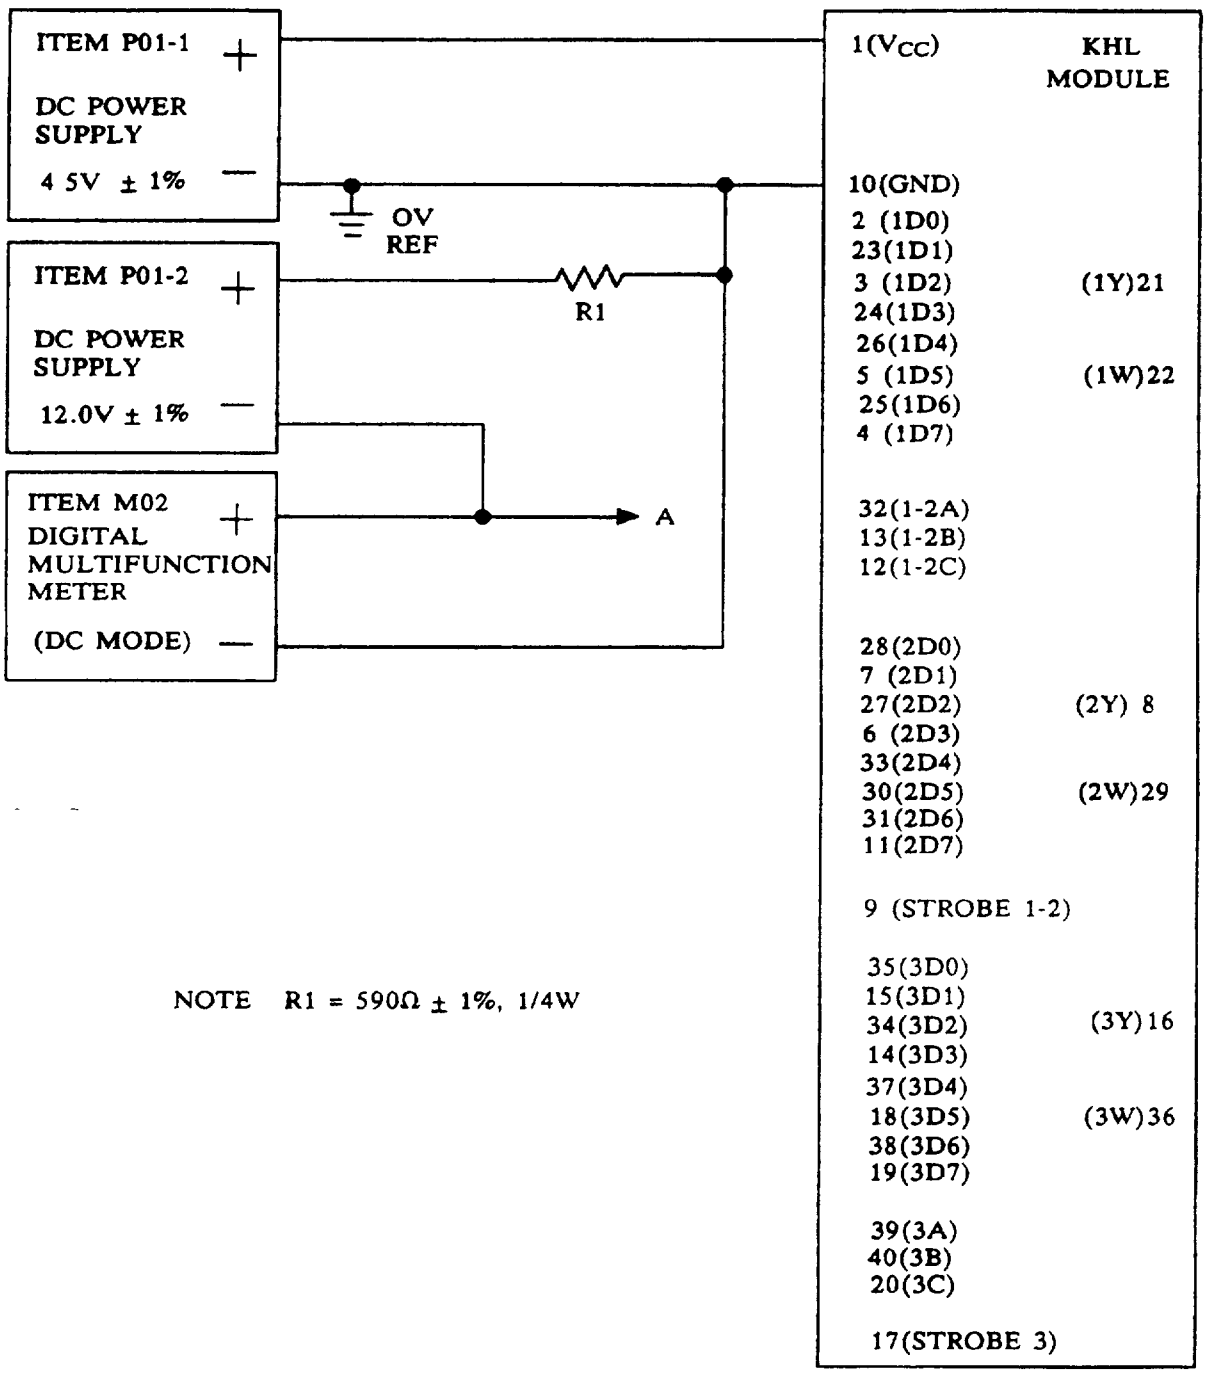

NOTE R1 = 590Ω ± 1%, 1/4W

FIGURE 12 Input clamp diode voltage test circuit for table IX

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T15:58Z
Check the source to verify that this is the current version before use.

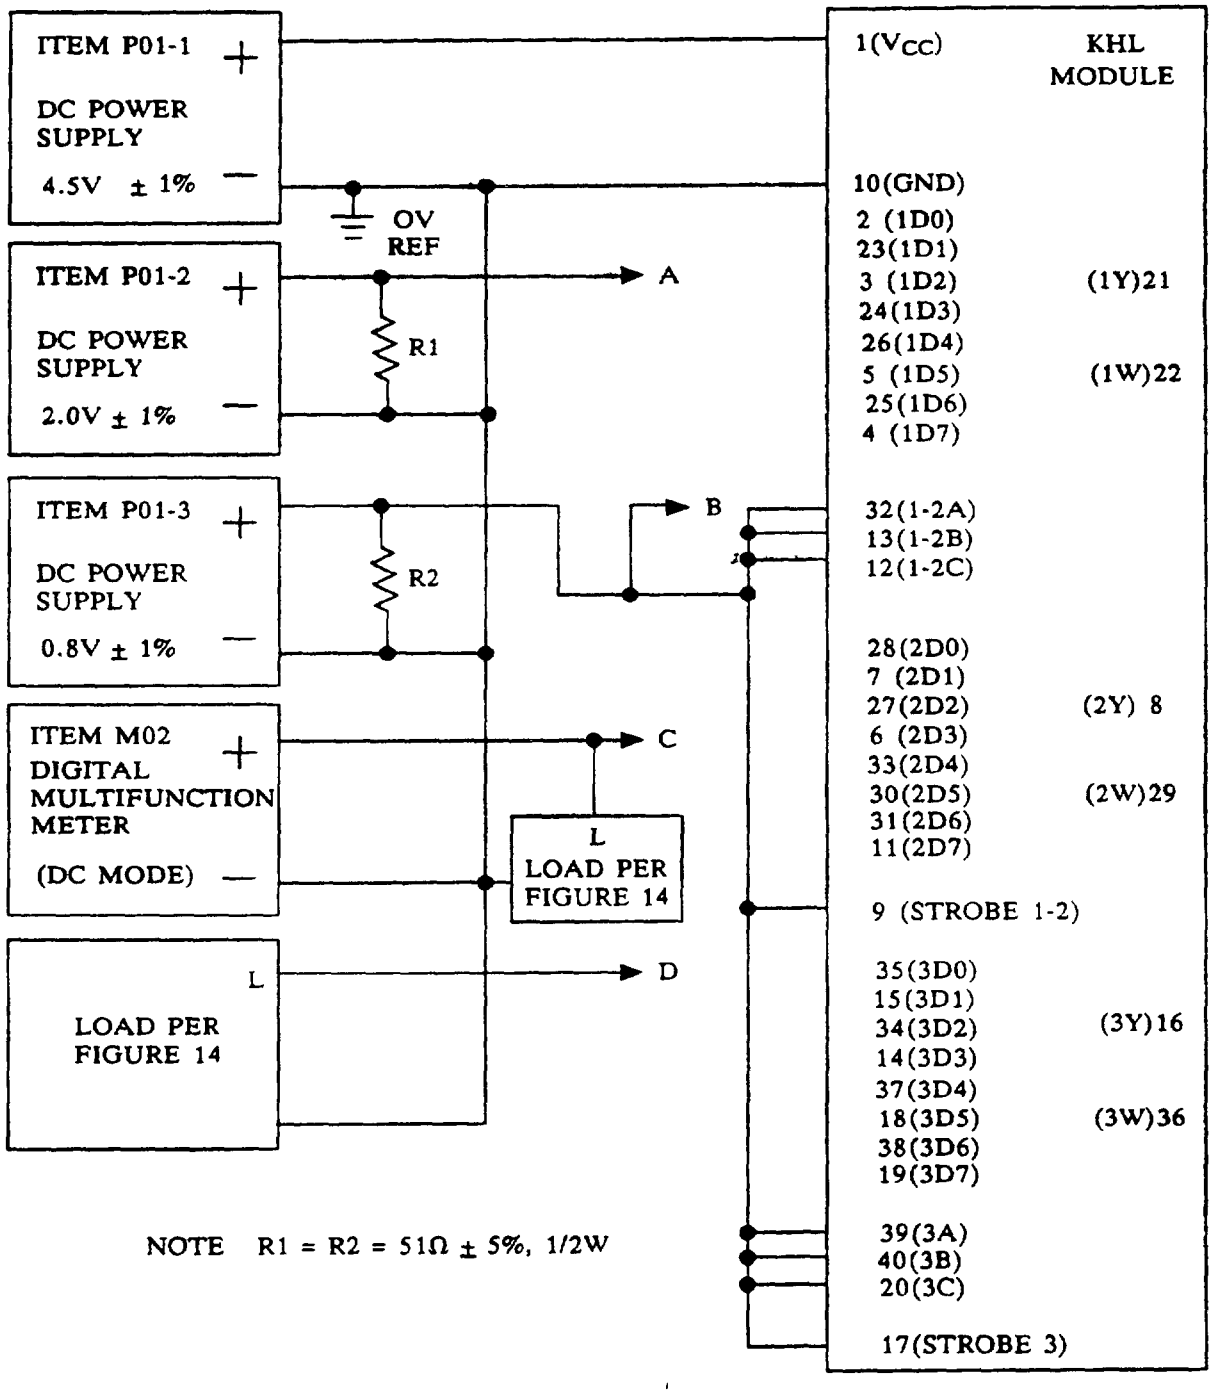


FIGURE 13. Static output voltage (low-level and high-level) test circuit for tables X and XI.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T15:58Z
Check the source to verify that this is the current version before use.