MILITARY SPECIFICATION

MODULES, STANDARD ELECTRONIC

INVERTER, DIGITAL, KEY CODE RBG

This amendment forms a part of Military Specification MIL-M-28787/82A(EC), dated 18 January 1980, and is approved for use by the Naval Electronic Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

PAGE 8

4.3, delete and substitute the following:

"4.3 Test equipment. Test equipment specified on figures and in tables with a type designator shall be as specified in MIL-STD-1665. Other equipment and components shall be as specified on the figures. All resistors shall be metal film and all capacitors shall be ceramic unless otherwise specified."

PAGE 15

FIGURE 5, ITEM R06 box: Delete "100 V ±10%" and substitute "100 V dc ±10%."

PAGE 17

FIGURE 6: Delete and substitute new figure 6 as printed on page 2 of this amendment.

PAGE 26

FIGURE 10: Delete and substitute new figure 10 as printed on page 3 of this amendment.

PAGE 29

FIGURE 11: Delete and substitute new figure 11 as printed on page 4 of this amendment.


Agent:
DLA - ES

Preparing activity:
Navy - EC

(Project 5963-N578)

FSC 5963


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T15:59Z
Check the source to verify that this is the current version before use.

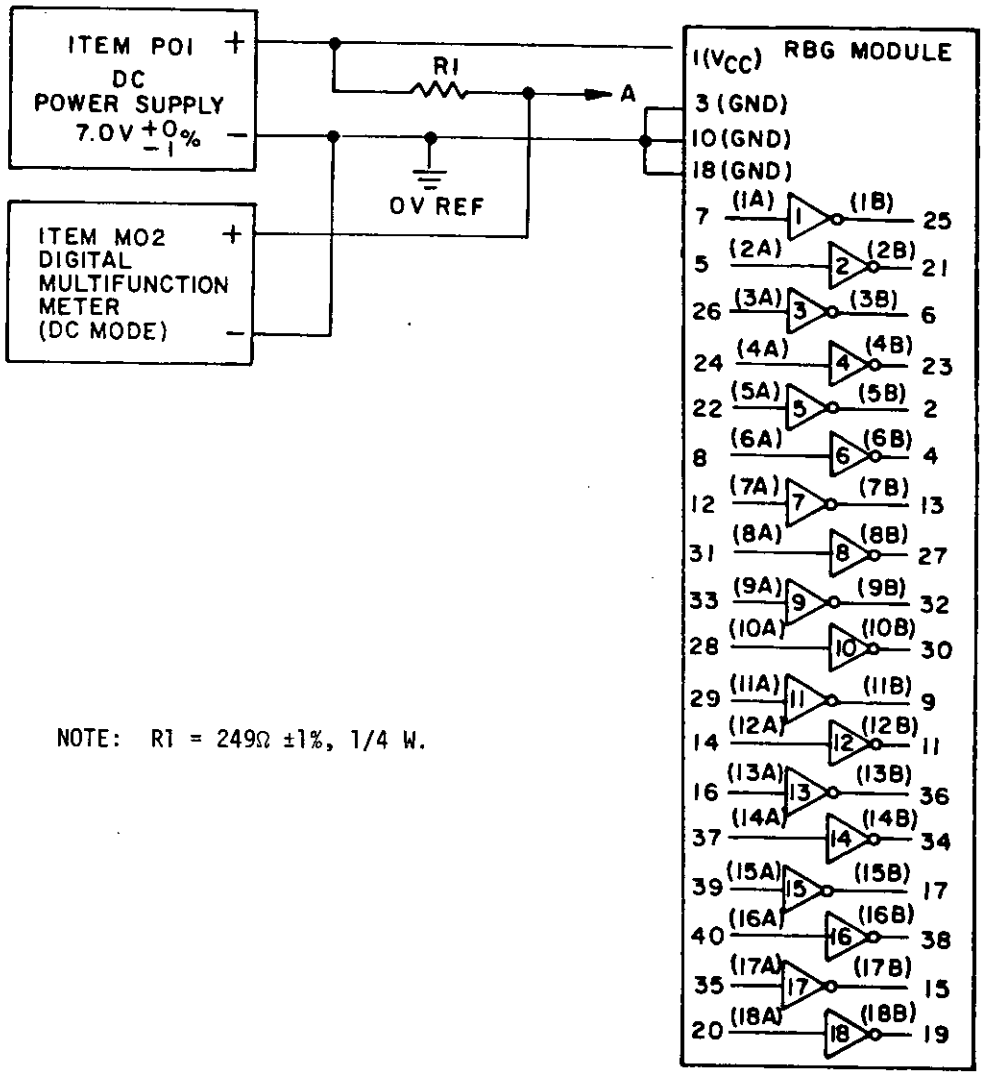

NOTE: R1 = 249Ω ±1%, 1/4 W.

FIGURE 6. V_{OUT} (low-loaded) test circuit for table IV.


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T15:59Z
Check the source to verify that this is the current version before use.

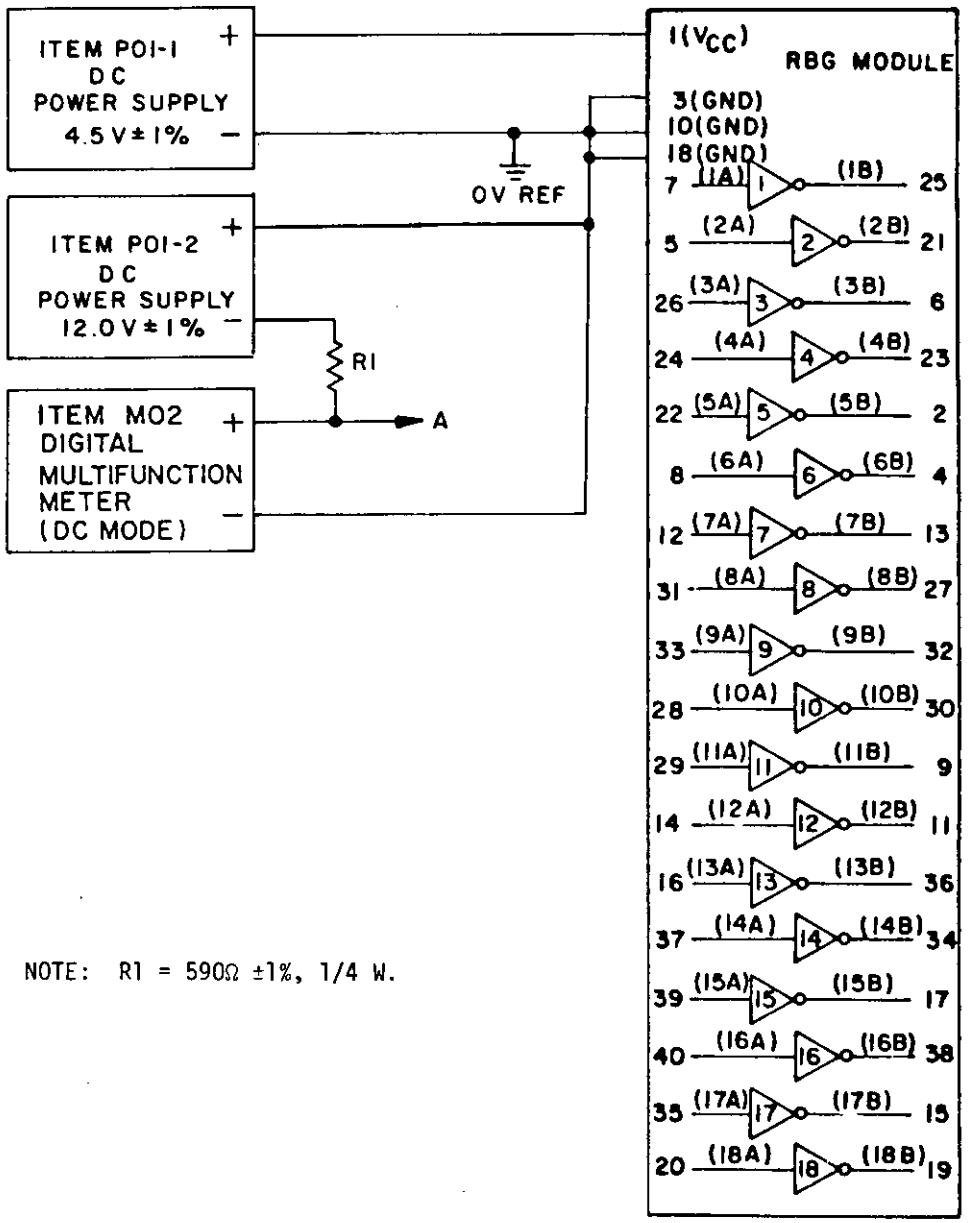

NOTE: R1 = 590Ω ±1%, 1/4 W.

FIGURE 10. Input clamp diode voltage test circuit for table VIII.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T15:59Z
Check the source to verify that this is the current version before use.

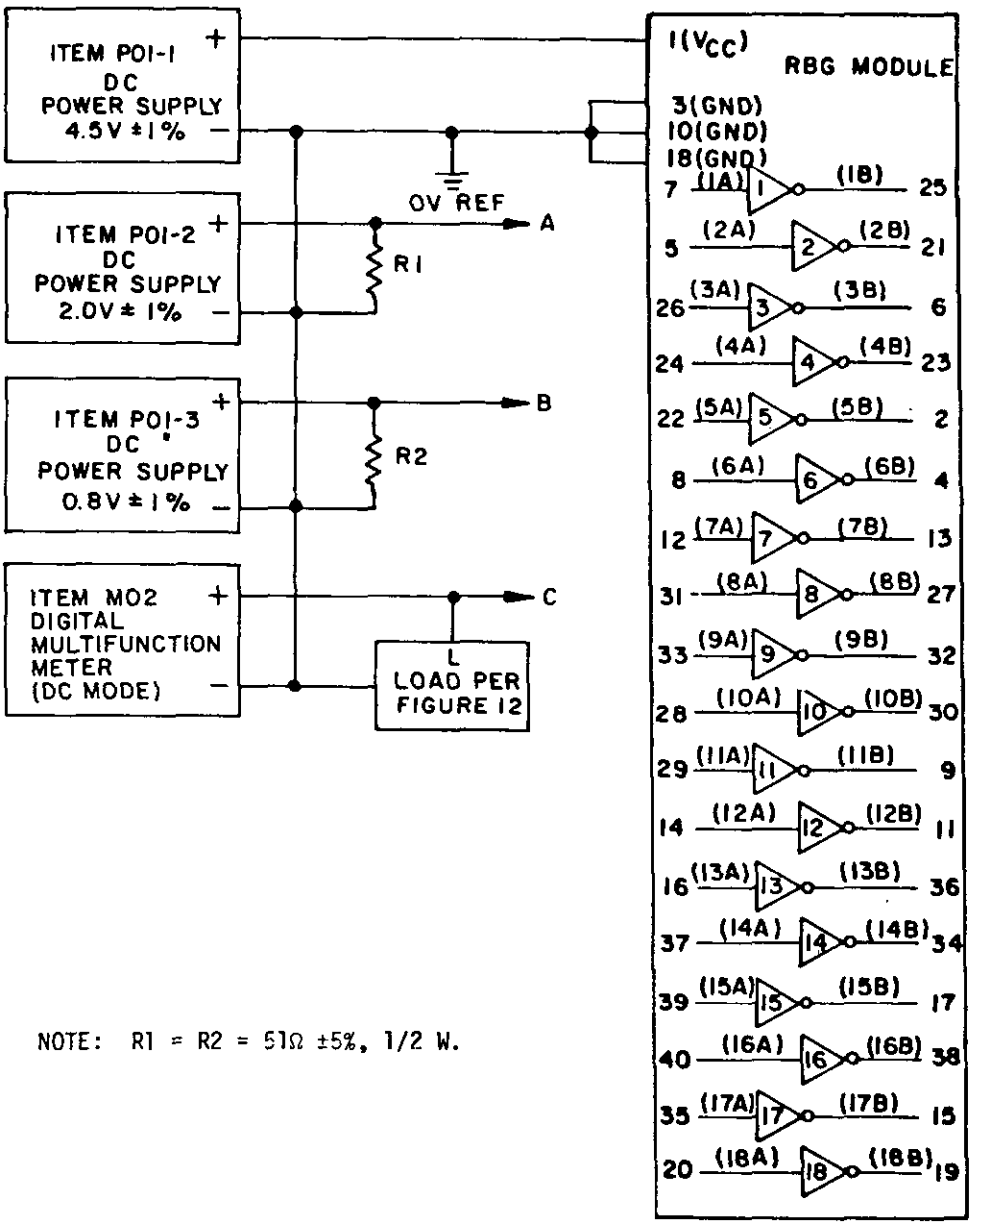

NOTE: R1 = R2 = 51Ω ±5%, 1/2 W.

FIGURE 11. Static output voltage (low-level and high-level) test circuit for tables IX and X.

★ U.S. GOVERNMENT PRINTING OFFICE: 1983—705—040/168

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T15:59Z
Check the source to verify that this is the current version before use.