MIL-M-28787/88A(EC)
14 August 1981
SUPERSEDING
MIL-M-28787/88(EC)
26 July 1976

MILITARY SPECIFICATION

MODULES, STANDARD ELECTRONIC

MULTIPLEXER, ANALOG, KEY CODE SEX

This specification is approved for use by the Naval Electronic Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This document establishes the requirements and test procedures for the acquisition of an electronic analog multiplexer module.

1.2 Classification. This specification covers one class of modules.

Class I as specified in MIL-STD-1389.

2. APPLICABLE DOCUMENTS

2.1 Government specifications and standards. Unless otherwise specified, the following specification and standards, of the issue listed in that issue of the Department of Defense Index of Specifications and Standards specified in the solicitation, form a part of this specification to the extent specified herein.

SPECIFICATION

MILITARY

MIL-M-28787 - Modules, Standard Electronic, General Specification for.

STANDARDS

MILITARY

MIL-STD-1389 - Design Requirements for Standard Electronic Modules.
MIL-STD-1665 - Test Equipment for the Standard Electronic Modules Program.

(Copies of specification, standards, handbooks, drawings, and publications required by manufacturers in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

2.2 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence.

3. REQUIREMENTS

3.1 General requirements. The module shall comply with the requirements of MIL-M-28787 except as modified herein.

3.2 Correlation requirements. Before any production modules are tested, all testers and test equipment shall be correlated in accordance with MIL-M-28787.

3.3 Failure rate requirements. All modules acquired to this specification shall have a predicted failure rate no greater than 0.17 failures per million operating hours when predicted in accordance with MIL-STD-1389.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Naval Electronic Systems Command, ATTN: ELEX 8111, Department of the Navy, Washington, DC 20360, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 5963

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:02Z
Check the source to verify that this is the current version before use.

3.4 Performance requirements. The module shall conform to the electrical requirement specified in table I and shall operate within the environment of design class I as specified in MIL-STD-1389.

3.5 Module configuration requirements. The module configuration requirements shall be in accordance with MIL-STD-1389 and as specified herein.

3.5.1 Key code. The module key code shall be SEX.

3.5.2 Size. The module size shall be 1A.

3.5.3 Weight. The module shall have a maximum weight of 35 grams.

3.5.4 Contact pins. The module shall have 40 contact pins positioned A1 through A40.

3.5.5 Fin position. The module shall have an insertion and extraction and heat dissipation fin on increment A.

3.5.6 Depth. The module shall have no additional depth requirements.

3.5.7 Holddown holes. The module shall have no additional requirements for location or quantity of holddown holes.

3.5.8 Marking. Marking shall be as specified in MIL-STD-1389, and the module shall be marked with the military part number M28787/88-1, except no marking shall interfere with heat dissipation from the fin (for example, affixing a label which may be a heat barrier).

3.6 Circuit pin configuration. The function diagram and pin assignments shall conform to figure 1.

3.7 Acceptance tests. All production modules shall be tested in accordance with footnotes 1 and 2 of table I.

3.8 End-of-life limits. Modules which have been plugged into an operating system, or exceed 2 years from date of manufacture and are to be tested, shall be capable of conforming to the 25°C end-of-life limits of table I (see 6.2).

4. QUALITY ASSURANCE PROVISIONS

4.1 Quality assurance. The quality assurance provisions of MIL-M-28787 shall apply.

4.2 Acceptance tests. Acceptance tests of all modules shall be in accordance with procedures and equipment specified in MIL-M-28787.

4.3 Test equipment. Test equipment specified on figures and in tables with a type designator shall be as specified in MIL-STD-1665. Other equipment and components shall be as specified on the figures. All resistors shall be metal film and all capacitors shall be ceramic unless otherwise specified.


4.4 Test procedures. The module shall be tested as specified in table I.

4.4.1 Alternate test methods. Alternate test methods may be employed if approved by the Standard Electronic Modules Program Quality Assurance Activity and they conform to the requirements of MIL-M-28787.

4.4.2 Order of testing. Test conditions A through P shall be performed in any order with the following exceptions. If test condition A is part of a sequence of tests, the order of testing shall be as follows A, where applicable, followed by the remaining tests in the sequence.

4.5 Qualification testing. Initial qualification tests and periodic-check tests shall be performed in accordance with the test plan specified in MIL-M-28787 with the following modifications or additions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:02Z
Check the source to verify that this is the current version before use.

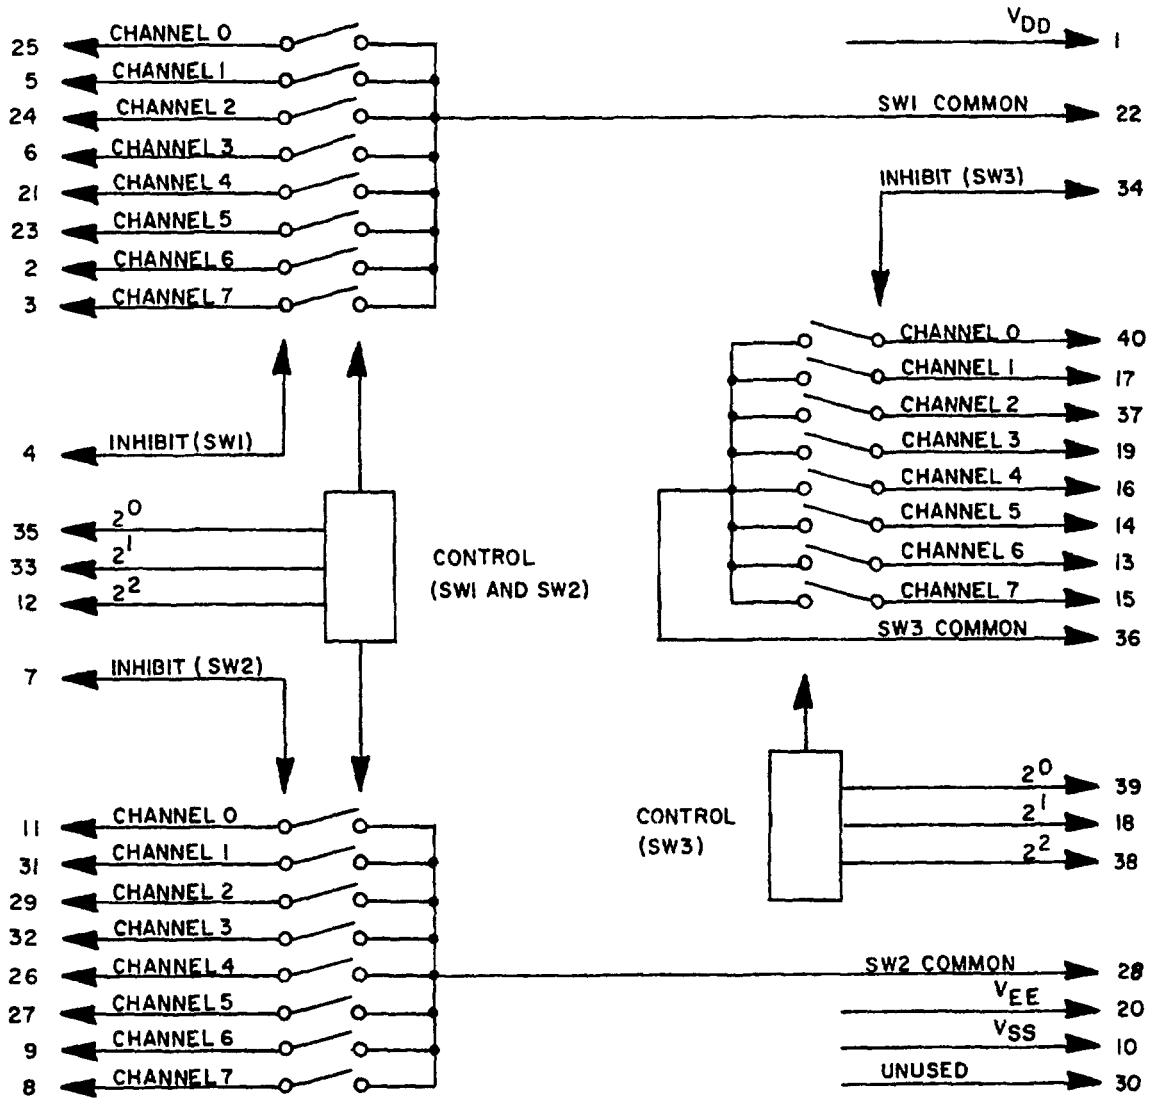

NOTES:
1. V_{DD} = Positive analog and digital supply.
2. V_{SS} = Negative digital supply.
3. V_{EE} = Negative analog supply.

FIGURE 1. SEX module functional diagram, analog multiplexer.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:02Z
Check the source to verify that this is the current version before use.

TABLE I. Module electrical requirements.

Test condition	Parameter	Ref test table	Test type 1/-3/	Acceptance requirements 25°±5°C ambient temperature				Operating temperature 0° to 60°C				Unit
				Initial		End-of-life		Initial		End-of-life		
				Min	Max	Min	Max	Min	Max	Min	Max	
A1	Isolation	III	X	10	∞	10	∞	10	∞	10	∞	MΩ
A2	Isolation	III	S	10	∞	10	∞	10	∞	10	∞	MΩ
B1-B24	ON resistance check	IV	S	0	500	0	660	0	660	0	720	Ω
B25-B48	ON resistance check	IV	X	0	280	0	400	0	400	0	480	Ω
B49-B54	ON resistance check	IV	S	0	2500	0	3500	0	3500	0	4000	Ω
C1-C16	Channel leakage current	V	X	-200	200	-200	200	-200	200	-200	200	nA
D1-D9	Digital input current, high level	VI	X	-200	200	-200	200	-200	200	-200	200	nA
E1-E9	Digital input current, low level	VII	X	-200	200	-200	200	-200	200	-200	200	nA
F1-F24	Functional	VIII	X	2.7	3.5	2 7	3.5	2.7	3.5	2.7	3.5	mA
F25-F26	Functional	VIII	X	-200	200	-200	200	-200	200	-200	200	nA
G1,G2	Quiescent power supply current	IX	S	0	60	0	60	0	600	0	600	μA
H1-H27	Switching time, t_{ON}	X	S	0	500	0	500	0	500	0	500	ns
J1-J24	Switching time, t_{OFF}	XI	S	0	500	0	500	0	500	0	500	ns
J25-J27	Switching time, t_{OFF}	XI	S	0	600	0	600	0	600	0	600	ns
K1-K3	Output crosstalk	XII	Q	-∞	-35	-∞	-35	-∞	-35	-∞	-35	dB
K4-K30	Output crosstalk	XII	Q	-∞	-60	-∞	-60	-∞	-60	-∞	-60	dB
L1-L16	Power supply ripple rejection	XIII	S	-∞	-60	-∞	-60	-∞	-60	-∞	-60	dB
M1-M24	Distortion	XIV	X	0	1	0	1	0	1	0	1	%
N1,N2	Power supply filter capacitance	XV	S	0.075	0.125	0.075	0.125	0.075	0.125	0.075	0.125	μF
P1-P33	Input capacitance	XV	X	0	18	0	18	0	18	0	18	pF

1/ "X" parameters shall be 100 percent tested during module acceptance tests.

2/ "S" parameters shall be sample acceptance tested (1 percent or two modules from each inspection lot, whichever is greater) at 25°C.

3/ "Q" parameters shall be tested during qualification testing only.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:02Z
Check the source to verify that this is the current version before use.

4.5.1 Operating temperature test. The operating temperature tests shall be conducted in accordance with MIL-M-28787. Before starting these tests, test conditions A through P in table I shall be performed in the order specified in 4.4.2 using the initial limits at 25° ±5°C ambient. When electrical testing is called for at the end of each temperature stabilization period, test conditions B and F through N shall be performed in the order specified in 4.4.2 using the initial limits for applicable operating temperature. At all other times during the operating temperature tests, the module shall be operated in the test circuit shown on figure 2. Test conditions C, D, and E shall be performed at 25°C and 60°C using the initial limits for the applicable temperature.

4.5.1.1 Component temperature test. The component temperature test shall be conducted in accordance with MIL-M-28787. The module shall be operated as shown on figure 2.

4.5.2 Vibration tests. The vibration tests shall be conducted in accordance with MIL-M-28787. During the vibration tests, the module shall be operated in the test circuit shown on figure 3. Following the vibration tests, the electrical tests of table I which are marked with an "X" in the test type column shall be performed using the initial limits at 25° ±5°C ambient.

4.5.3 Life test. The life test shall be conducted in accordance with MIL-M-28787. The module shall be operated as shown on figure 2. Following the life test and while still at the maximum class temperature, electrical tests B through N shall be performed in the order specified in 4.4.2 using the operating temperature end-of-life requirements of table I. Following the return of the module to 25°C, electrical tests A through P shall be performed in the order specified in 4.4.2 using the 25° ±5°C ambient end-of-life requirements of table I.

5. PACKAGING

5.1 Packaging requirements. The requirements for packaging shall be in accordance with MIL-M-28787.

6. NOTES

6.1 Definitions. Definitions are as specified in MIL-STD-1331.

6.2 End-of-life. When any individual module circuit parameter fails to conform to the end-of-life requirements of table I, the module is considered to have completed its useful life (see 3.8).

6.3 Cross reference of classification. Part number M28787/88-1 supersedes part number M28787/88. The two parts are interchangeable.

6.4 Module description. The following electrical parameters reflect the 0° to 60°C end-of-life limits from table I.

Maximum power dissipation: 250 mW (any channel)

750 mW (module)

Supply voltages (see 6.5.1): $V_{DD} - V_{SS}$ = -0.5 to +20 Vdc

$V_{DD} - V_{EE}$ = -0.5 to +20 Vdc

V_{DD} = Positive analog and digital supply

V_{SS} = Negative digital supply

V_{EE} = Negative analog supply

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:02Z
Check the source to verify that this is the current version before use.

Input levels (V_{DD} = 5 V)

Digital

High level: 3.5 Vdc minimum, V_{DD} maximum

Low level. V_{SS} minimum, 1.5 Vdc maximum

Analog: V_{EE} minimum, V_{DD} maximum

ON channel current: 10 mA maximum

6.5 Module function. This module contains three 8-input analog multiplexers controlled by six digital inputs. Two multiplexers are controlled by three digital bits paralleled to both multiplexers. The third multiplexer has its own three bit digital control lines. In addition, each multiplexer has its own inhibit line.

6.5.1 Maximum ratings. The maximum ratings for supply voltages and input levels given in 6.4 represent extremes beyond which damage to the module may occur. Performance specifications are tested at supply levels 18 percent less than maximum ratings and digital input levels equal to or less than V_{DD} or V_{SS}.

6.5.2 Module handling procedures. This module contains CMOS devices which are susceptible to damage when exposed to a static electrical charge. When handling, shipping, or storing, all module pins should be shorted or the module should be placed in an electrically conductive package. Soldering iron tips and all test equipment must be grounded. Failure to comply with these guidelines could cause irreversible module damage.

6.5.2.1 Test procedure precautions. Failure to comply with the following procedures will result in irreversible module damage (1) All test equipment must be grounded; (2) V_{DD}, V_{SS}, and V_{EE} must be applied before applying input signals or conditioning voltages, (3) All input signals and conditioning voltages must be removed before V_{DD}, V_{SS}, or V_{EE} is disconnected, (4) All unused control and inhibit inputs must be connected to V_{DD}, V_{SS}, or V_{EE}. No CMOS control or inhibit inputs should ever be left floating.

6.5.3 Input to output relationship. The digital input versus ON channel relationship is shown in table II.

6.6 Changes from previous issue. Asterisks are not used in this revision to identify changes with respect to the previous issue, due to the extensiveness of the changes.

Agent:
DLA - ES

Preparing activity:
Navy - EC

(Project 5963-N230)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:02Z
Check the source to verify that this is the current version before use.

TABLE II. Input to output relationship. 1/-3/

Inhibit 4	2^2 12	2^1 33	2^0 35	Channel ON	Inhibit 7	2^2 12	2^1 33	2^0 35	Channel ON
L	L	L	L	25◄►22	L	L	L	L	11◄►28
L	L	L	H	5◄►22	L	L	L	H	31◄►28
L	L	H	L	24◄►22	L	L	H	L	29◄►28
L	L	H	H	6◄►22	L	L	H	H	32◄►28
L	H	L	L	21◄►22	L	H	L	L	26◄►28
L	H	L	H	23◄►22	L	H	L	H	27◄►28
L	H	H	L	2◄►22	L	H	H	L	9◄►28
L	H	H	H	3◄►22	L	H	H	H	8◄►28
H	X	X	X	None	H	X	X	X	None


Inhibit 34	2^2 38	2^1 18	2^0 39	Channel ON
L	L	L	L	40◄►36
L	L	L	H	17◄►36
L	L	H	L	37◄►36
L	L	H	H	19◄►36
L	H	L	L	16◄►36
L	H	L	H	14◄►36
L	H	H	L	13◄►36
L	H	H	H	15◄►36
H	X	X	X	None

1/ L = Low level = V_{SS}.

2/ H = High level = V_{DD}.

3/ X = Don't care condition.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:02Z
Check the source to verify that this is the current version before use.

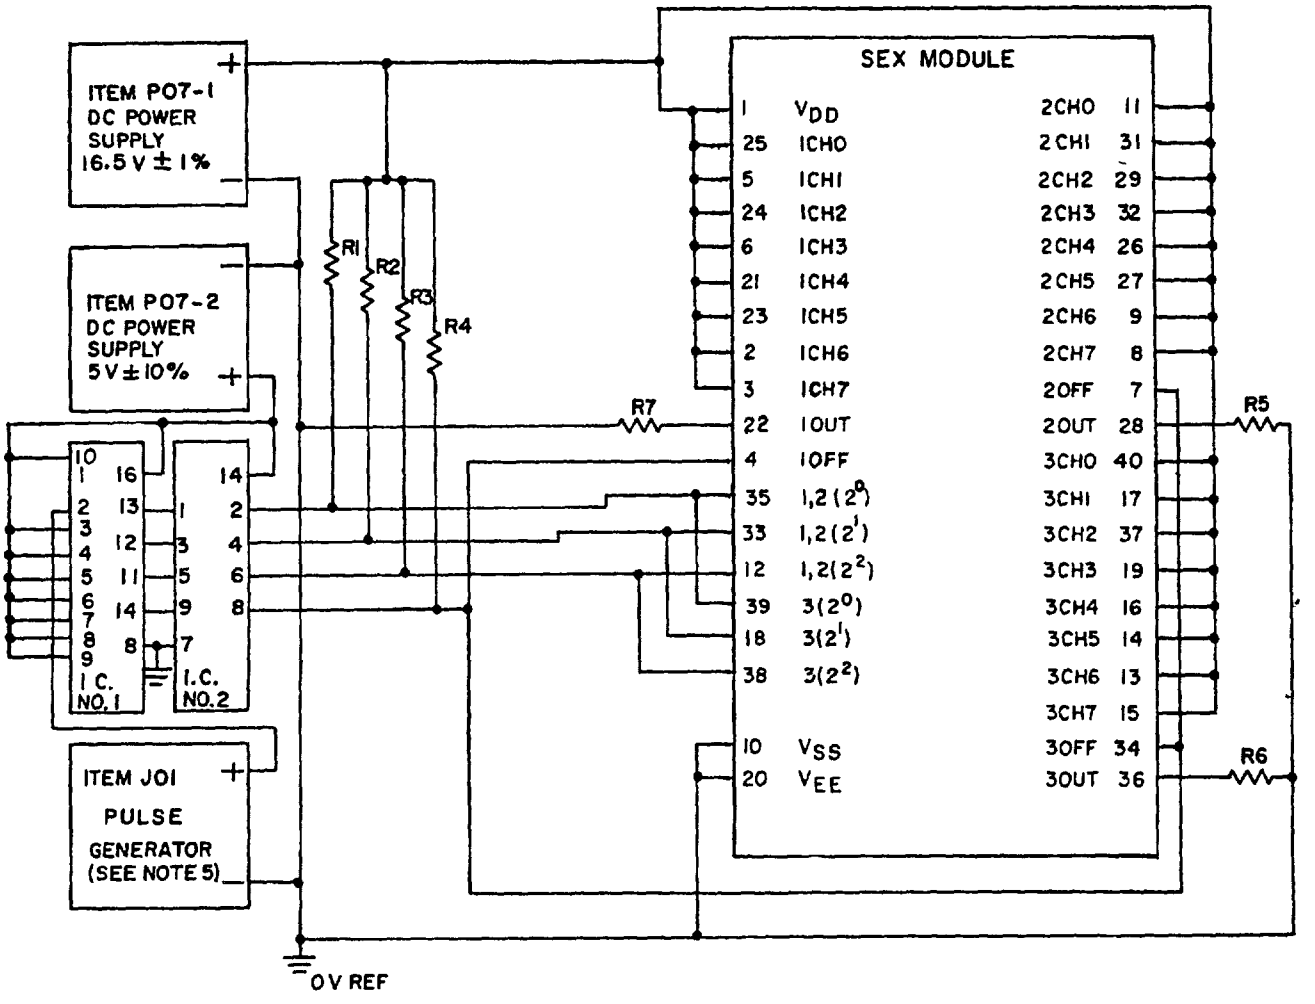

NOTES:
1. R1-R4 = 1 kΩ ±1%, 1/2 W.
2. R5-R7 = 604Ω ±1%, 1/2 W.
3. IC No. 1 = Fairchild 9316P, or equivalent.
4. IC No. 2 = Texas Instruments SN5407N, or equivalent.
5. Item J01 setup:
   Up level = 4.8 ±0.2 V.
   Down level = 0.4 ±0.4 V.
   Duty cycle = 50 ±5%.
   $t_{THL} = t_{TLH}$ = 30 ±25 ns.
   Frequency = 1 MHz ±10%.

FIGURE 2. Operating temperature, component temperature, and life test circuit.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:02Z
Check the source to verify that this is the current version before use.

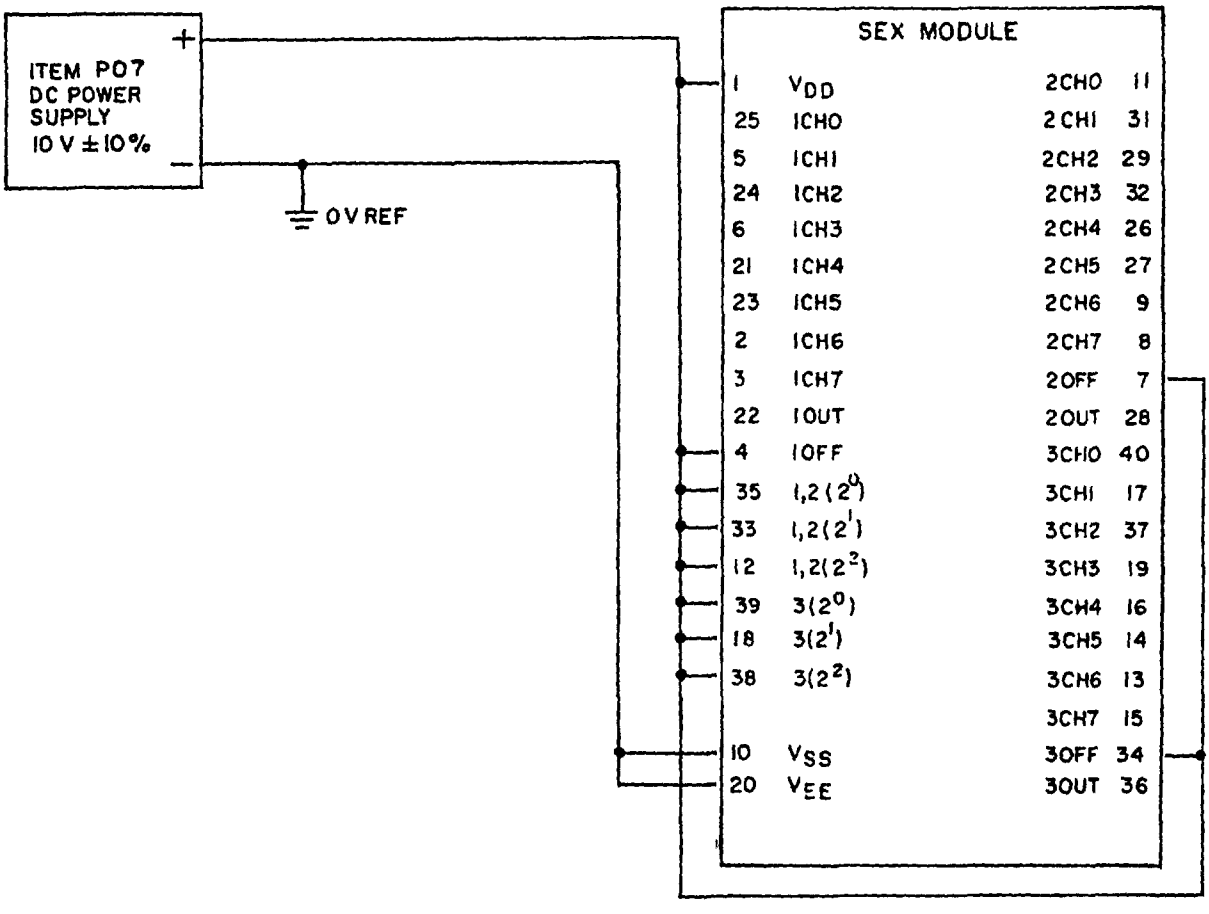



FIGURE 3. Vibration test circuit.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:02Z
Check the source to verify that this is the current version before use.

TABLE III. Isolation test.

Test condition	Parameter	Connect		Initial limits 25°±5°C ambient		Unit	Test figure
		A to pin	B to pin	Min	Max		
A1	Isolation	All pins except pin 30	30	10	∞	MΩ	4
A2	Isolation	All pins	Frame	10	∞	MΩ	4

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:02Z
Check the source to verify that this is the current version before use.

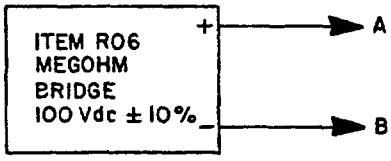

SEX MODULE			
1	V_{DD}	2CHO	11
25	ICHO	2CHI	31
5	ICHI	2CH2	29
24	ICH2	2CH3	32
6	ICH3	2CH4	26
21	ICH4	2CH5	27
23	ICH5	2CH6	9
2	ICH6	2CH7	8
3	ICH7	2OFF	7
22	IOUT	2OUT	28
4	IOFF	3CHO	40
35	$1,2(2^0)$	3CHI	17
33	$1,2(2^1)$	3CH2	37
12	$1,2(2^2)$	3CH3	19
39	$3(2^0)$	3CH4	16
18	$3(2^1)$	3CH5	14
38	$3(2^2)$	3CH6	13
		3CH7	15
10	V_{SS}	3OFF	34
20	V_{EE}	3OUT	36

WARNING

When using a megohm bridge, high voltage may be present at any of the output binding posts. Always set the megohm bridge function switch to "discharge" before connecting or disconnecting the test leads

NOTE On test condition A2 (when measuring to frame) penetrate the anodized finish of the module frame with a sharply pointed probe connected to the negative terminal.

FIGURE 4. Isolation test circuit for table III.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:02Z
Check the source to verify that this is the current version before use.

TABLE IV. ON resistance check.

Test condition	Parameter 1/	Switch position S3	S2	S1	Connect A to pin	B to pin	Initial limits 25°±5°C ambient Min	Max	Unit	Test figure
B1	ON resistance check	L	L	L	25	22	0	833	mV	5
B2		L	L	H	5					
B3		L	H	L	24					
B4		L	H	H	6					
B5		H	L	L	21					
B6		H	L	H	23					
B7		H	H	L	2					
B8		H	H	H	3					
B9		L	L	L	11	28				
B10		L	L	H	31					
B11		L	H	L	29					
B12		L	H	H	32					
B13		H	L	L	26					
B14		H	L	H	27					
B15		H	H	L	9					
B16		H	H	H	8					
B17		L	L	L	40	36				
B18		L	L	H	17	36				

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:02Z
Check the source to verify that this is the current version before use.

TABLE IV. ON resistance check - Continued.

Test condition	Parameter 1/	Switch position			Connect		Initial limits 25°±5°C ambient		Unit	Test figure
		S3	S2	S1	A to pin	B to pin	Min	Max		
B19	ON resistance check	L	H	L	37	36	0	833	mV	5
B20		L	H	H	19					
B21		H	L	L	16					
B22		H	L	H	14					
B23		H	H	L	13					
B24		H	H	H	15					
B25		L	L	L	25	22		737		
B26		L	L	H	5					
B27		L	H	L	24					
B28		L	H	H	6					
B29		H	L	L	21					
B30		H	L	H	23					
B31		H	H	L	2					
B32		H	H	H	3					
B33		L	L	L	11	28				
B34		L	L	H	31					
B35		L	H	L	29					
B36		L	H	H	32					

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:02Z
Check the source to verify that this is the current version before use.


TABLE IV. ON resistance check - Continued.

Test condition	Parameter 1/	Switch position			Connect		Initial limits 25°±5°C ambient		Unit	Test figure
		S3	S2	S1	A to pin	B to pin	Min	Max		
B37	ON resistance check	H	L	L	26	28	0	737	mV	5
B38		H	L	H	27					
B39		H	H	L	9					
B40		H	H	H	8					
B41		L	L	L	40	36				
B42		L	L	H	17					
B43		L	H	L	37					
B44		L	H	H	19					
B45		H	L	L	16					
B46		H	L	H	14					
B47		H	H	L	13					
B48		H	H	H	15			962		
B49		L	L	L	25	22				
B50		H	L	L	21	22				
B51		L	L	L	11	28				
B52		H	L	L	26	28				
B53		L	L	L	40	36				
B54		H	L	L	16	36				

1/ $\frac{1\ V}{\text{ON resistance} + 100\Omega} = \frac{\text{(Test condition B) V}}{\text{ON resistance}}$

This equation verifies that the ON resistance is 500 ohms maximum, 280 ohms maximum, and 2500 ohms maximum for test conditions B1-B24, B25-B48, and B49-B54 respectively.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:02Z
Check the source to verify that this is the current version before use.

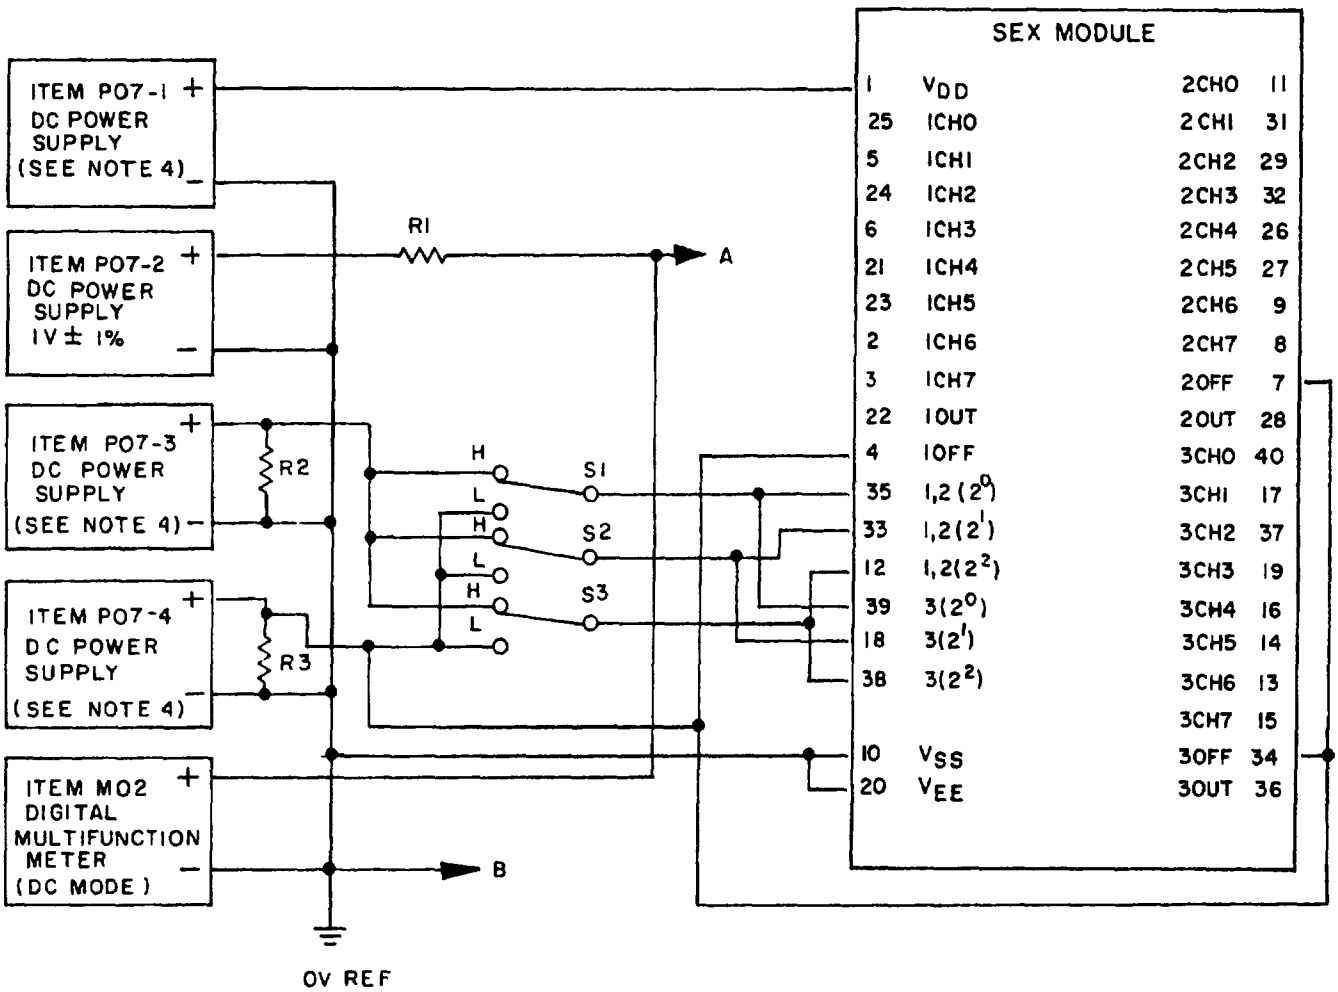

NOTES:
1. R1 = 100Ω ±1%, 1/8 W.
2. R2 = R3 = 50Ω ±5%, 1/2 W.
3. S1 = S2 = S3 = SPDT switch.
4. For test conditions B1-B24 set item PO7-1 to 10 V ±1%, item PO7-3 to 7 V ±1%, and item PO7-4 to 3 V ±1%. For test conditions B25-B48 set item PO7-1 to 15 V ±1%, item PO7-3 to 11 V ±1%, and item PO7-4 to 4 V ±1%. For test conditions B49-B54 set item PO7-1 to 5 V ±1%, item PO7-3 to 3.5 V ±1%, and item PO7-4 to 1.5 V ±1%.


FIGURE 5. ON resistance check test circuit for table IV.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:02Z
Check the source to verify that this is the current version before use.

TABLE V. Channel leakage current test.

Test condition	Parameter	Switch position S3	Switch position S2	Switch position S1	Connect A to pin	Connect B to pin	Initial limits 25°+5°C ambient Min	Initial limits 25°+5°C ambient Max	Unit	Test figure
C1	Channel leakage current	L	L	L	25	Open	-200	200	nA	6
C2		L	L	H						
C3		L	H	L						
C4		L	H	H						
C5		H	L	L						
C6		H	L	H						
C7		H	H	L						
C8		H	H	H						
C9		L	L	L	Open	25				
C10		L	L	H						
C11		L	H	L						
C12		L	H	H						
C13		H	L	L						
C14		H	L	H						
C15		H	H	L						
C16		H	H	H						

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:02Z
Check the source to verify that this is the current version before use.

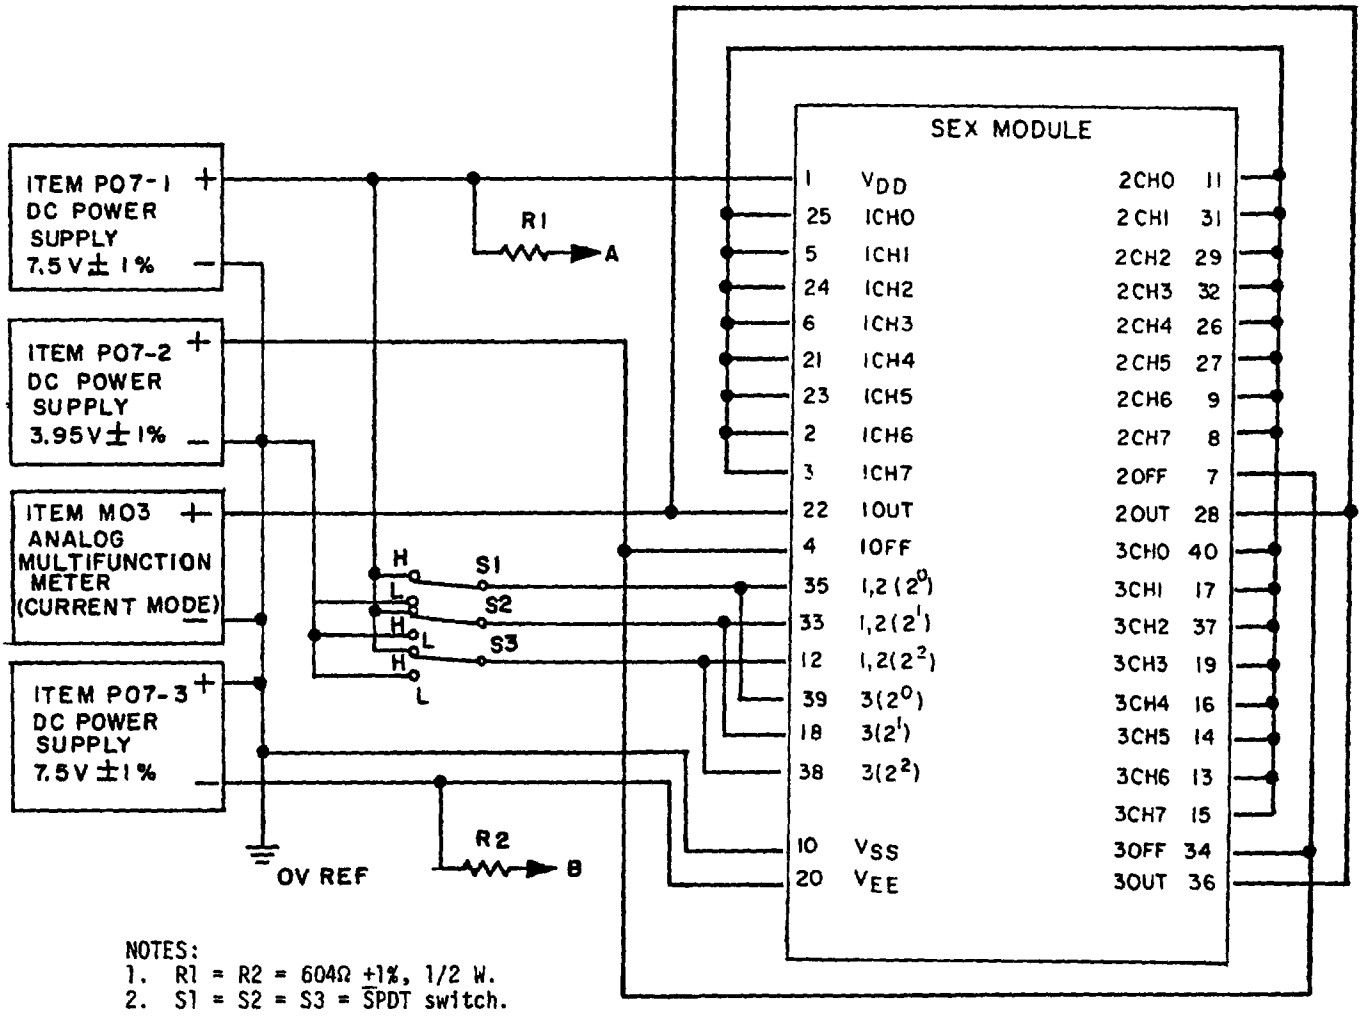

NOTES:
1. R1 = R2 = 604Ω ±1%, 1/2 W.
2. S1 = S2 = S3 = SPDT switch.

FIGURE 6. Channel leakage current test circuit for table V.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:02Z
Check the source to verify that this is the current version before use.

TABLE VI. Digital input current (high-level) test.

Test condition	Parameter	Connect		Initial limits 25°±5°C ambient		Unit	Test figure
		A to pin	B to pin	Min	Max		
D1	Digital input current, high level	35,33,12,39,18, 38,7,34	4	-200	200	nA	7
D2		4,33,12,39,18, 38,7,34	35				
D3		4,35,12,39,18, 38,7,34	33				
D4		4,35,33,39,18, 38,7,34	12				
D5		4,35,33,12,18, 38,7,34	39				
D6		4,35,33,12,39, 38,7,34	18				
D7		4,35,33,12,39, 18,7,34	38				
D8		4,35,33,12,39, 18,38,34	7				
D9		4,35,33,12,39, 18,38,7	34				

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:02Z
Check the source to verify that this is the current version before use.

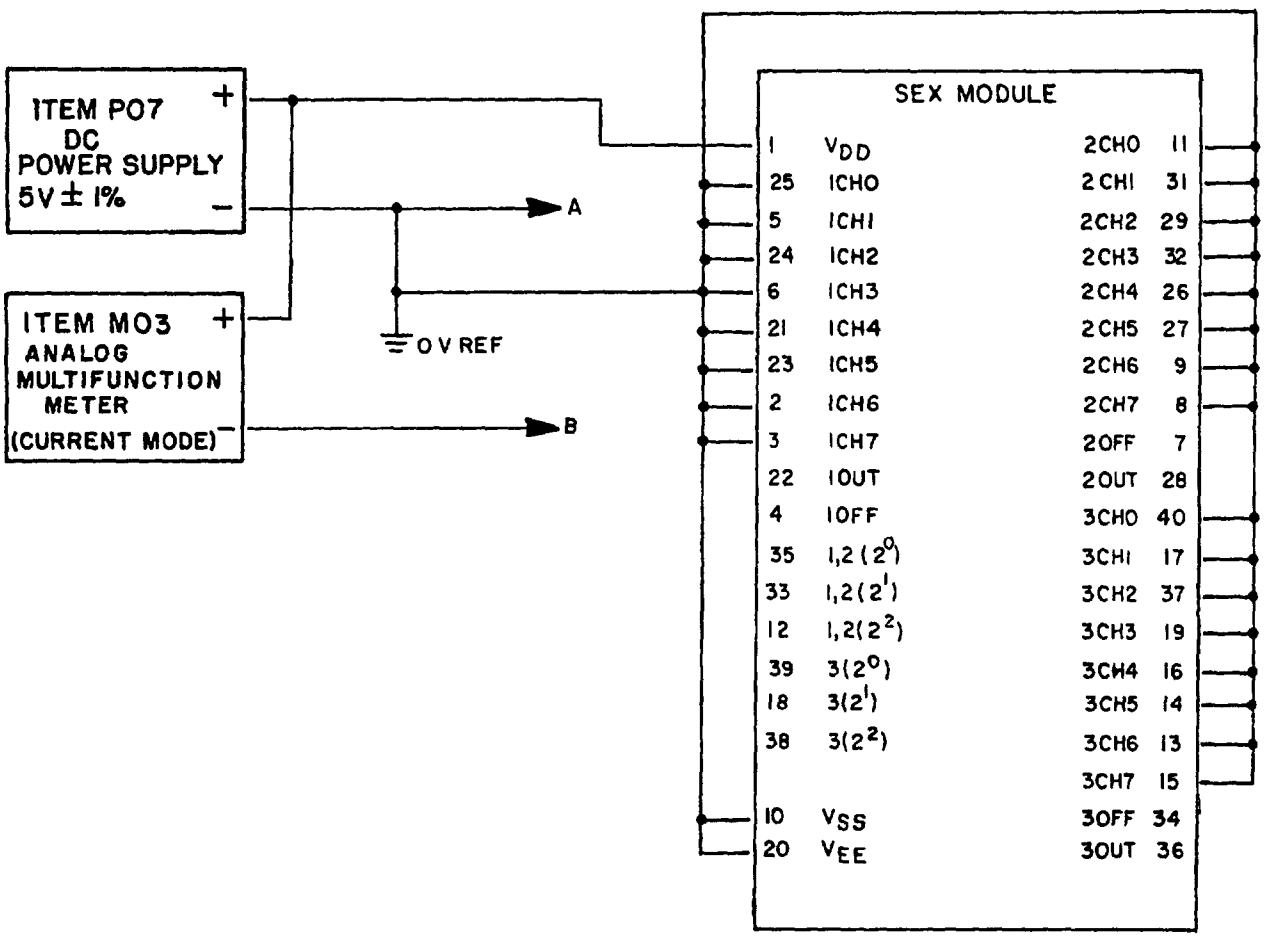


FIGURE 7. Digital input current (high-level) test circuit for table VI.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:02Z
Check the source to verify that this is the current version before use.

TABLE VII. Digital input current (low-level) test.

Test condition	Parameter	Connect		Initial limits 25°±5°C ambient		Unit	Test figure
		A to pin	B to pin	Min	Max		
E1	Digital input current, low level	35,33,12,39,18, 38,7,34	4	-200	200	nA	8
E2		4,33,12,39,18, 38,7,34	35				
E3		4,35,12,39,18, 38,7,34	33				
E4		4,35,33,39,18, 38,7,34	12				
E5		4,35,33,12,18, 38,7,34	39				
E6		4,35,33,12,39, 38,7,34	18				
E7		4,35,33,12,39, 18,7,34	38				
E8		4,35,33,12,39, 18,38,34	7				
E9		4,35,33,12,39, 18,38,7	34				

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:02Z
Check the source to verify that this is the current version before use.

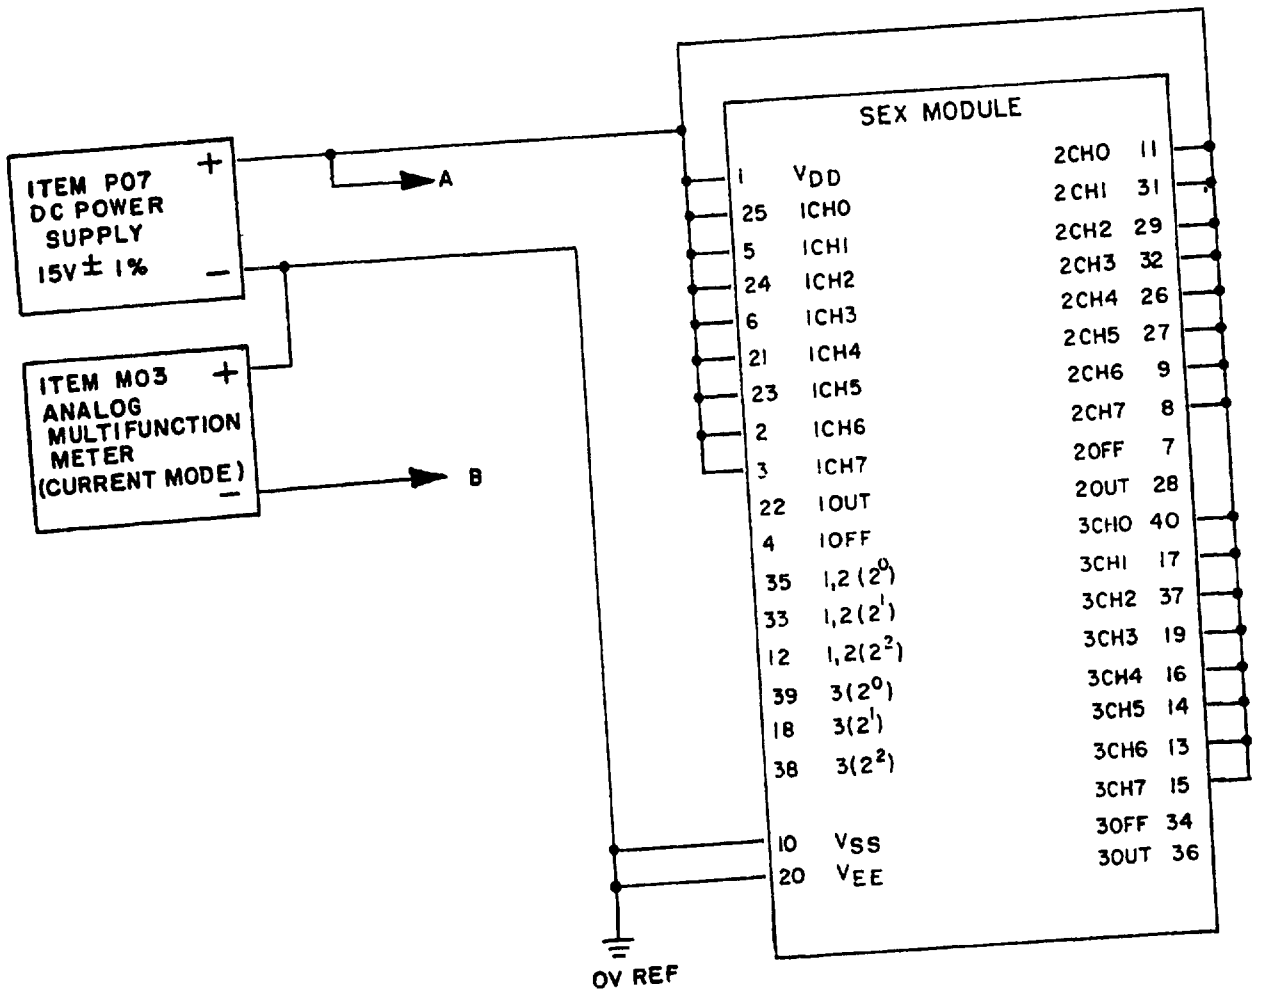


FIGURE 8. Digital input current (low-level) test circuit for table VII.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:02Z
Check the source to verify that this is the current version before use.

TABLE VIII. Functional test.


Test condition	Parameter	Switch position			Connect			Initial limits 25°+5°C ambient		Unit	Test figure
		S3	S2	S1	A to pin	B to pin	C to pin	Min	Max		
F1	Functional	L	L	L	7,34	4	22,28,36	2.7	3.5	mA	9
F2		L	L	H							
F3		L	H	L							
F4		L	H	H							
F5		H	L	L							
F6		H	L	H							
F7		H	H	L							
F8		H	H	H	4,34	7					
F9		L	L	L							
F10		L	L	H							
F11		L	H	L							
F12		L	H	H							
F13		H	L	L							
F14		H	L	H							
F15		H	H	L							
F16		H	H	H							

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:02Z
Check the source to verify that this is the current version before use.

TABLE VIII. Functional test - Continued.

Test condition	Parameter	Switch position			Connect			Initial limits 25°±5°C ambient		Unit	Test figure
		S3	S2	S1	A to pin	B to pin	C to pin	Min	Max		
F17	Functional	L	L	L	4,7	34	22,28,36	2.7	3.5	mA	9
F18		L	L	H							
F19		L	H	L							
F20		L	H	H							
F21		H	L	L							
F22		H	L	H							
F23		H	H	L							
F24		H	H	H							
F25		L	L	L			22,28	-200	200	nA	
F26		L	L	L	4,34	7	22	-200	200	nA	

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:02Z
Check the source to verify that this is the current version before use.

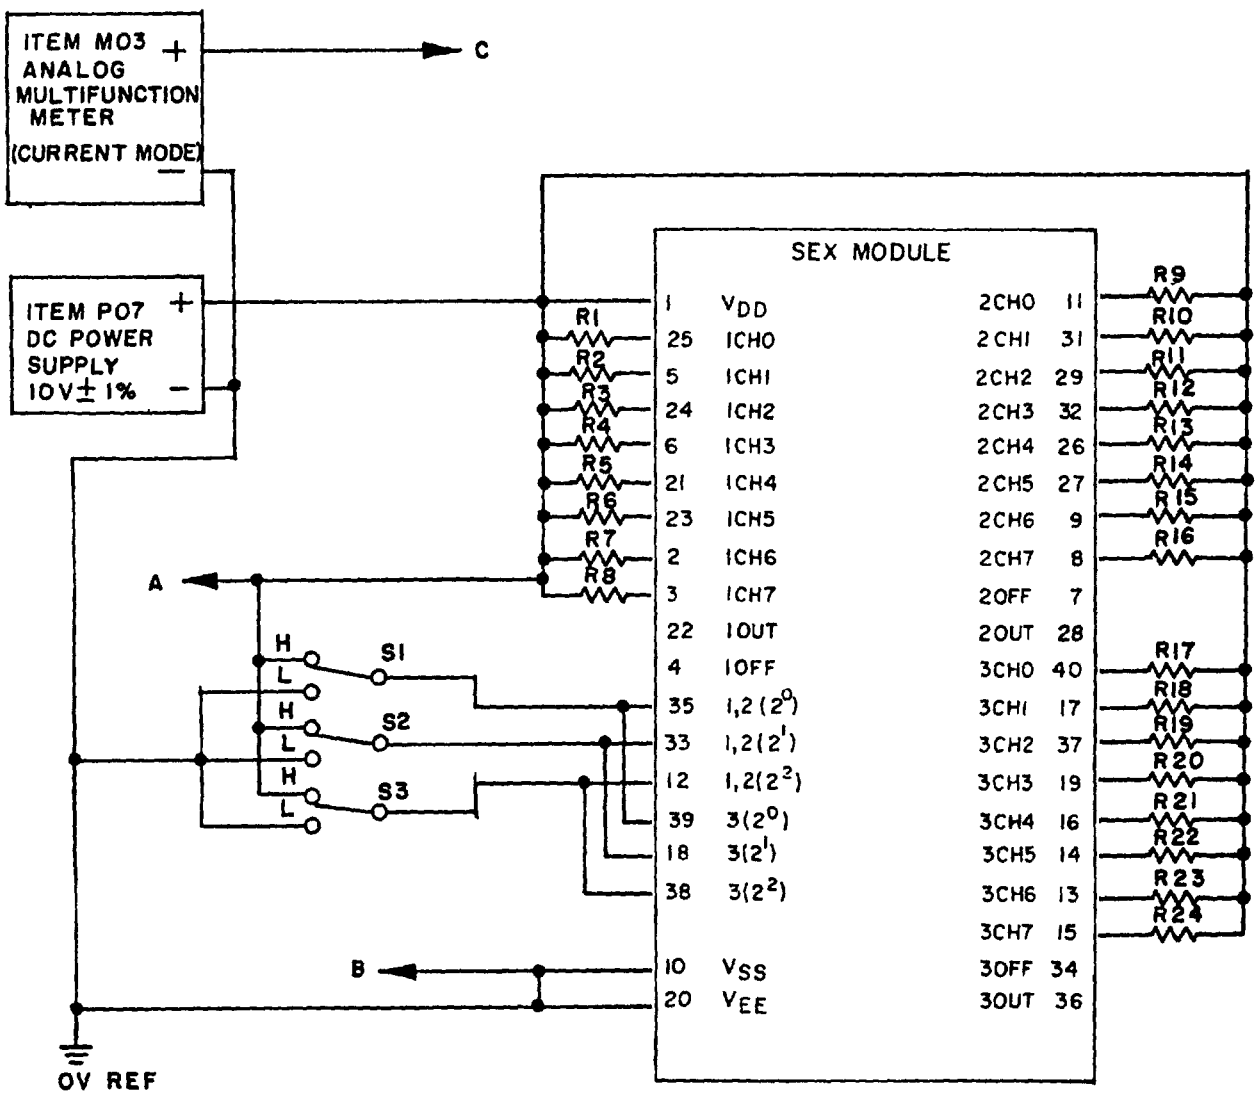

NOTES:
1. R1-R24 = 3.01 kΩ ±1%, 1/8 W.
2. S1 = S2 = S3 = SPDT switch.


FIGURE 9. Functional test circuit for table VIII.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:02Z
Check the source to verify that this is the current version before use.

TABLE IX. Quiescent power supply current test.

Test condition	Parameter	Initial limits 25°±5°C ambient		Unit	Test figure
		Min	Max		
G1	Quiescent power supply current	0	60	µA	10
G2	Quiescent power supply current	0	60	µA	10

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:02Z
Check the source to verify that this is the current version before us

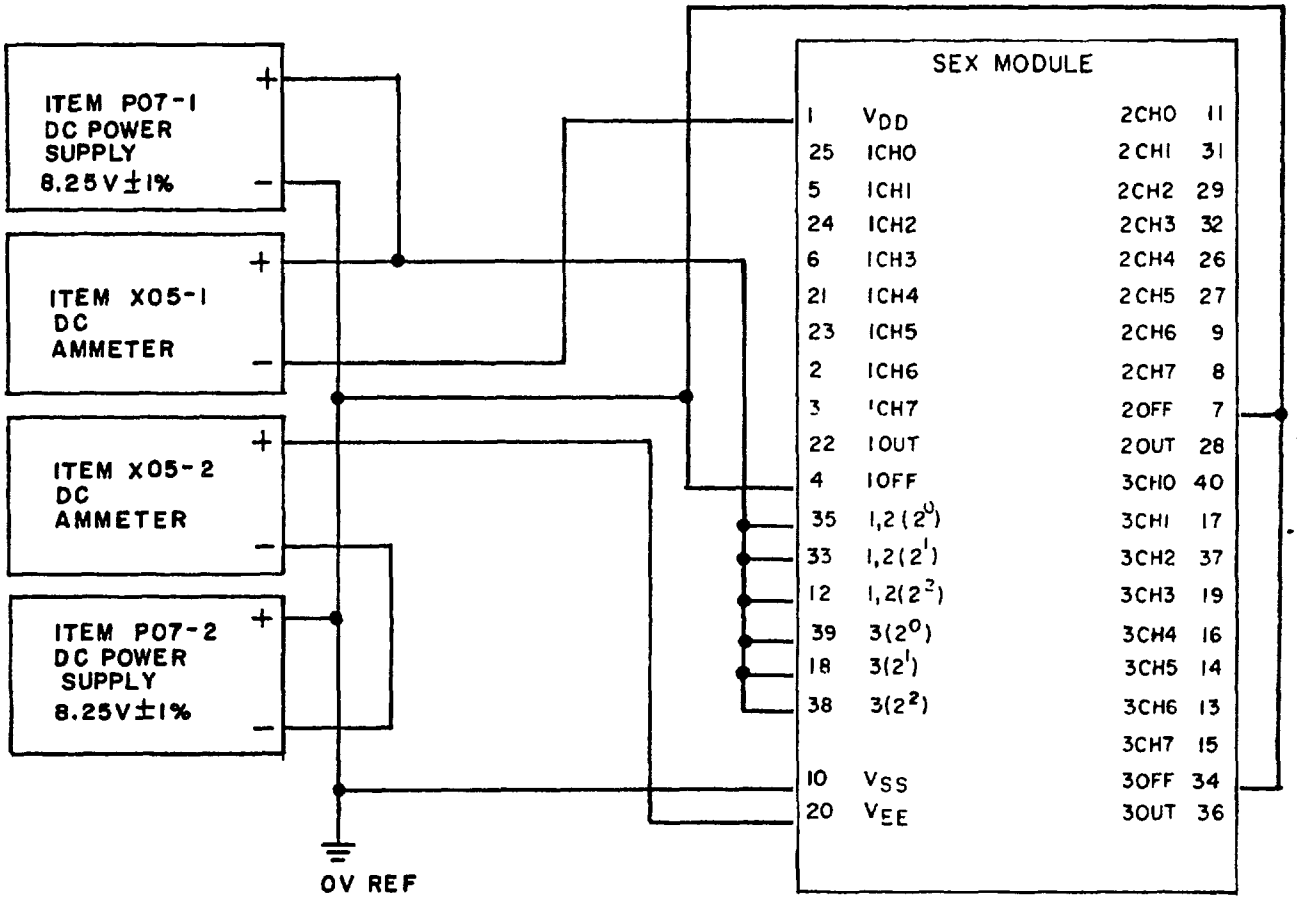

NOTES:
1. Since items X05-1 and X05-2 are not used simultaneously, only one item X05 is required.
2. Read item X05-1 for test condition G1. Read item X05-2 for test condition G2.

FIGURE 10. Quiescent power supply current test circuit for table IX.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:02Z
Check the source to verify that this is the current version before use.

TABLE X. Switching time (t_{ON}) test.

Test condition	Parameter	Connect				Initial limits 25°±5°C ambient		Unit	Test figure
		A to pin	B to pin	C to pin	Pin 10 to pin	Min	Max		
H1	Switching time, t_{ON}	25	35	Open	4,7,12,33,34	0	500	ns	11,12
H2		5		Open	4,7,12,33,34				
H3		24		33	4,7,12,34				
H4		6		33	4,7,12,34				
H5		21		12	4,7,33,34				
H6		23		12	4,7,33,34				
H7		2		12,33	4,7,34				
H8		3		12,33	4,7,34				
H9		11		Open	4,7,12,33,34				
H10		31		Open	4,7,12,33,34				
H11		29		33	4,7,12,34				
H12		32		33	4,7,12,34				
H13		26		12	4,7,33,34				
H14		27		12	4,7,33,34				
H15		9		12,33	4,7,34				
H16		8		12,33	4,7,34				
H17		40		Open	4,7,12,33,34				
H18		17		Open	4,7,12,33,34				

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:02Z
Check the source to verify that this is the current version before use.

TABLE X. Switching time (t_{ON}) test - Continued.

Test condition	Parameter	Connect				Initial limits 25°±5°C ambient		Unit	Test figure
		A to pin	B to pin	C to pin	Pin 10 to pin	Min	Max		
H19	Switching time, t_{ON}	37	35	33	4,7,12,34	0	500	ns	11,12
H20		19		33	4,7,12,34				
H21		16		12	4,7,33,34				
H22		14		12	4,7,33,34				
H23		13		12,33	4,7,34				
H24		15		12,33	4,7,34				
H25		25	4	Open	7,12,33, 34,35				
H26		11	7	Open	4,12,33, 34,35				
H27		40	34	Open	4,7,12,33,35				

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:02Z
Check the source to verify that this is the current version before use.

TABLE XI. Switching time (t_{OFF}) test.


Test condition	Parameter	Connect				Initial limits 25°±5°C ambient		Unit	Test figure
		A to pin	B to pin	C to pin	Pin 10 to pin	Min	Max		
J1	Switching time, t_{OFF}	25	35	Open	4,7,12,33,34	0	500	ns	11,12
J2		5		Open	4,7,12,33,34				
J3		24		33	4,7,12,34				
J4		6		33	4,7,12,34				
J5		21		12	4,7,33,34				
J6		23		12	4,7,33,34				
J7		2		12,33	4,7,34				
J8		3		12,33	4,7,34				
J9		11		Open	4,7,12,33,34				
J10		31		Open	4,7,12,33,34				
J11		29		33	4,7,12,34				
J12		32		33	4,7,12,34				
J13		26		12	4,7,33,34				
J14		27		12	4,7,33,34				
J15		9		12,33	4,7,34				
J16		8		12,33	4,7,34				
J17		40		Open	4,7,12,33,34				
J18		17		Open	4,7,12,33,34				

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:02Z
Check the source to verify that this is the current version before use.

TABLE XI. Switching time (t_{OFF}) test - Continued.

Test condition	Parameter	Connect				Initial limits 25°±5°C ambient		Unit	Test figure
		A to pin	B to pin	C to pin	Pin 10 to pin	Min	Max		
J19	Switching time, t_{OFF}	37	35	33	4,7,12,34	0	500	ns	11,12
J20		19		33	4,7,12,34				
J21		16		12	4,7,33,34				
J22		14		12	4,7,33,34				
J23		13		12,33	4,7,34				
J24		15		12,33	4,7,34				
J25		25	4	Open	7,12,33, 34,35		600		
J26		11	7	Open	4,12,33, 34,35		600		
J27		40	34	Open	4,7,12,33,35		600		


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:02Z
Check the source to verify that this is the current version before use.

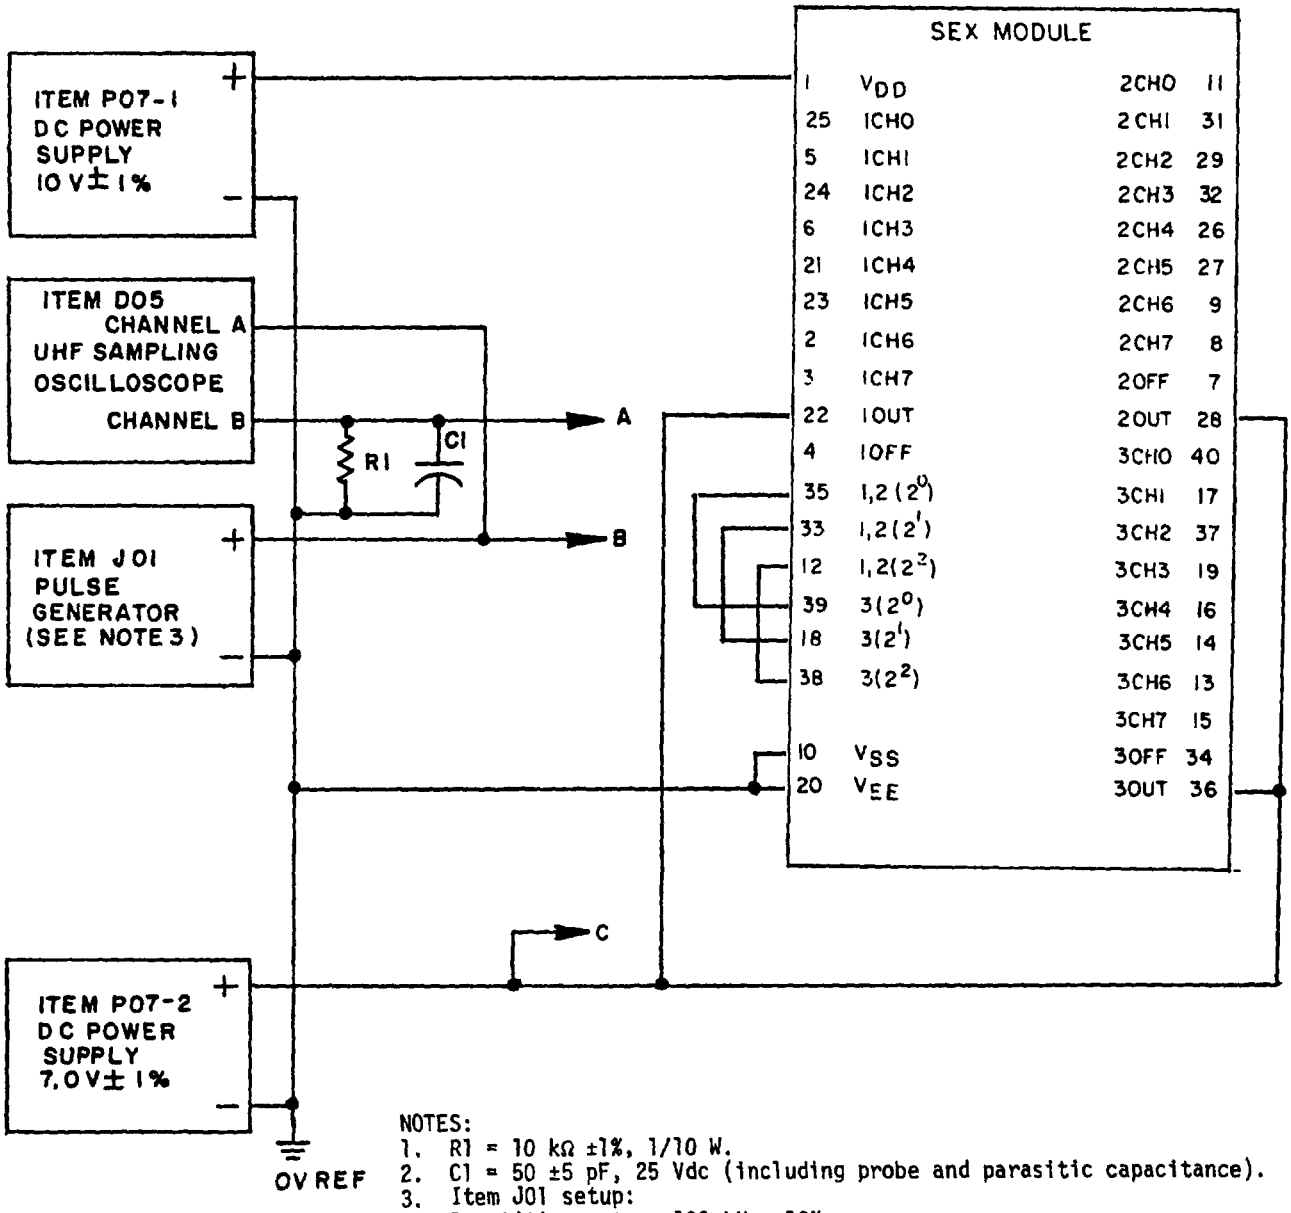

NOTES:
1. R1 = 10 kΩ ±1%, 1/10 W.
2. C1 = 50 ±5 pF, 25 Vdc (including probe and parasitic capacitance).
3. Item J01 setup:
   Repetition rate = 100 kHz ±10%.
   Duty cycle = 50% ±10%.
   Amplitude low = 0.2 ±0.2 V.
   Amplitude high = 7.0 ±0.7 V.
   $t_{TLH} = t_{THL}$ = 30 ns maximum.

FIGURE 11. Switching time (t_{ON}) and switching time (t_{OFF}) test circuit for tables X and XI.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:02Z
Check the source to verify that this is the current version before use.

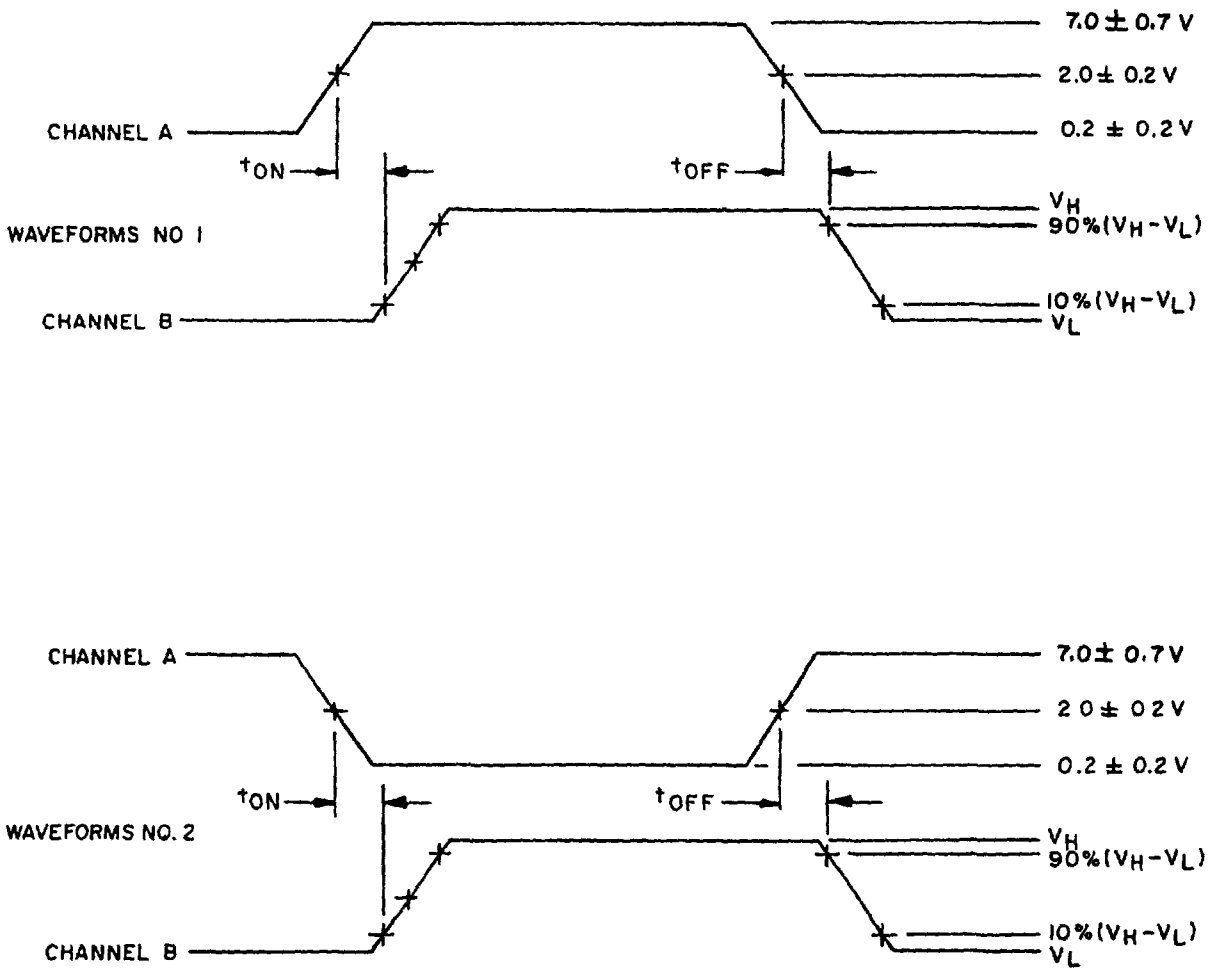

NOTES:
1. Waveforms No. 1 apply to test conditions H2-H24 (even) and J2-J24 (even).
2. Waveforms No. 2 apply to test conditions H1-H23 (odd), J1-J23 (odd), H25-H27, and J25-J27.

FIGURE 12. Switching time (t_{ON}) and switching time (t_{OFF}) test circuit waveforms for tables X and XI.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:02Z
Check the source to verify that this is the current version before use.

TABLE XII. Output crosstalk test.

Test condition	Parameter	Switch position			Connect						Initial limits 25°±5°C ambient		Unit	Test figure
		S3	S2	S1	A to pin	B to pin	C to pin	D to pin	E to pin	Pin 10 to pin	Min	Max		
K1	Output crosstalk 1/	L	L	L	4	25,5,24,6,21,23,2,3,11,31,29,32,26,27,9,8,40,17,37,19,16,14,13,15	22	22	Open	7,34	0	62	mVrms	13
K2		L	L	L	7		28	28	Open	4,34		62		
K3		L	L	L	34		36	36	Open	4,7		62		
K4		L	L	L	4		22	Open	22	7,34		3.5		
K5		L	L	L	7		28		28	4,34				
K6		L	L	L	34		36		36	4,7				
K7		L	L	L	Open	5,24,6,21,23,2,3,11,31,29,32,26,27,9,8,40,17,37,19,16,14,13,15	22		22	4,7,34				
K8		L	L	H		25,24,6,21,23,2,3,11,31,29,32,26,27,9,8,40,17,37,19,16,14,13,15								

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:02Z
Check the source to verify that this is the current version before use.

TABLE XII. Output crosstalk test - Continued.

Test condition	Parameter	Switch position			Connect						Initial limits 25°±5°C ambient		Unit	Test figure
		S3	S2	S1	A to pin	B to pin	C to pin	D to pin	E to pin	Pin 10 to pin	Min	Max		
K9	Output crosstalk 1/	L	H	L	Open	25,5,6,21,23,2,3,11,31,29,32,26,27,9,8,40,17,37,19,16,14,13,15	22	Open	22	4,7,34	0	3.5	mVrms	13
K10		L	H	H		25,5,24,21,23,2,3,11,31,29,32,26,27,9,8,40,17,37,19,16,14,13,15								
K11		H	L	L		25,5,24,6,23,2,3,11,31,29,32,26,27,9,8,40,17,37,19,16,14,13,15								
K12		H	L	H		25,5,24,6,21,2,3,11,31,29,32,26,27,9,8,40,17,37,19,16,14,13,15								

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:02Z
Check the source to verify that this is the current version before use.

TABLE XII. Output crosstalk test - Continued.

Test condition	Parameter	Switch position			Connect						Initial limits 25°+5°C ambient		Unit	Test figure
		S3	S2	S1	A to pin	B to pin	C to pin	D to pin	E to pin	Pin 10 to pin	Min	Max		
K13	Output crosstalk 1/	H	H	L	Open	25,5,24,6, 21,23,3, 11,31,29, 32,26,27, 9,8,40,17, 37,19,16, 14,13,15	22	Open	22	4,7,34	0	3.5	mVrms	13
K14		H	H	H		25,5,24, 6,21,23,2, 11,31,29, 32,26,27, 9,8,40,17, 37,19,16, 14,13,15	22		22					
K15		L	L	L		25,5,24,6, 21,23,2,3, 31,29,32, 26,27,9,8, 40,17,37, 19,16,14, 13,15	28		28					
K16		L	L	H		25,5,24,6, 21,23,2,3, 11,29,32, 26,27,9,8, 40,17,37, 19,16,14, 13,15	28		28					

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:02Z
Check the source to verify that this is the current version before use.

TABLE XII. Output crosstalk test - Continued.

Test condition	Parameter	Switch position			Connect						Initial limits 25°±5°C ambient		Unit	Test figure
		S3	S2	S1	A to pin	B to pin	C to pin	D to pin	E to pin	Pin 10 to pin	Min	Max		
K17	Output crosstalk 1/	L	H	L	Open	25,5,24,6,21,23,2,3,11,31,32,26,27,9,8,40,17,37,19,16,14,13,15	28	Open	28	4,7,34	0	3.5	mVrms	13
K18		L	H	H		25,5,24,6,21,23,2,3,11,31,29,26,27,9,8,40,17,37,19,16,14,13,15								
K19		H	L	L		25,5,24,6,21,23,2,3,11,31,29,32,27,9,8,40,17,37,19,16,14,13,15								
K20		H	L	H		25,5,24,6,21,23,2,3,11,31,29,32,26,9,8,40,17,37,19,16,14,13,15								

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:02Z
Check the source to verify that this is the current version before use.

TABLE XII. Output crosstalk test - Continued.

Test condition	Parameter	Switch position			Connect						Initial limits 25°±5°C ambient		Unit	Test figure
		S3	S2	S1	A to pin	B to pin	C to pin	D to pin	E to pin	Pin 10 to pin	Min	Max		
K21	Output crosstalk 1/	H	H	L	Open	25,5,24,6,21,23,2,3,11,31,29,32,26,27,8,40,17,37,19,16,14,13,15	28	Open	28	4,7,34	0	3.5	mVrms	13
K22		H	H	H		25,5,24,6,21,23,2,3,11,31,29,32,26,27,9,40,17,37,19,16,14,13,15	28		28					
K23		L	L	L		25,5,24,6,21,23,2,3,11,31,29,32,26,27,9,8,17,37,19,16,14,13,15	36		36					
K24		L	L	H		25,5,24,6,21,23,2,3,11,31,29,32,26,27,9,8,40,37,19,16,14,13,15	36		36					

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:02Z
Check the source to verify that this is the current version before use.

TABLE XII. Output crosstalk test - Continued.

Test condition	Parameter	Switch position			Connect						Initial limits 25°+5°C ambient		Unit	Test figure
		S3	S2	S1	A to pin	B to pin	C to pin	D to pin	E to pin	Pin 10 to pin	Min	Max		
K25	Output crosstalk 1/	L	H	L	Open	25,5,24,6, 21,23,2,3, 11,31,29, 32,26,27, 9,8,40,17, 19,16,14, 13,15	36	Open	36	4,7,34	0	3.5	mVrms	13
K26		L	H	H		25,5,24,6, 21,23,2,3, 11,31,29, 32,26,27, 9,8,40,17, 37,16,14, 13,15								
K27		H	L	L		25,5,24,6, 21,23,2,3, 11,31,29, 32,26,27, 9,8,40,17, 37,19,14, 13,15								
K28		H	L	H		25,5,24,6, 21,23,2,3, 11,31,29, 32,26,27, 9,8,40,17, 37,19,16, 13,15								

See footnote at end of table.


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:02Z
Check the source to verify that this is the current version before use.

TABLE XII. Output crosstalk test - Continued.

Test condition	Parameter	Switch position			Connect						Initial limits 25°+5°C ambient		Unit	Test figure
		S3	S2	S1	A to pin	B to pin	C to pin	D to pin	E to pin	Pin 10 to pin	Min	Max		
K29	Output crosstalk 1/	H	H	L	Open	25,5,24,6, 21,23,2,3, 11,31,29, 32,26,27, 9,8,40,17, 37,19,16, 14,15	36	Open	36	4,7,34	0	3.5	mVrms	13
K30	Output crosstalk 1/	H	H	H	Open	25,5,24,6, 21,23,2,3, 11,31,29, 32,26,27, 9,8,40,17, 37,19,16, 14,13	36	Open	36	4,7,34	0	3.5	mVrms	13

1/ 20 log $\frac{\text{(Test condition K)}}{3.5\ \text{Vrms}}$ = dB

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:02Z
Check the source to verify that this is the current version before use.

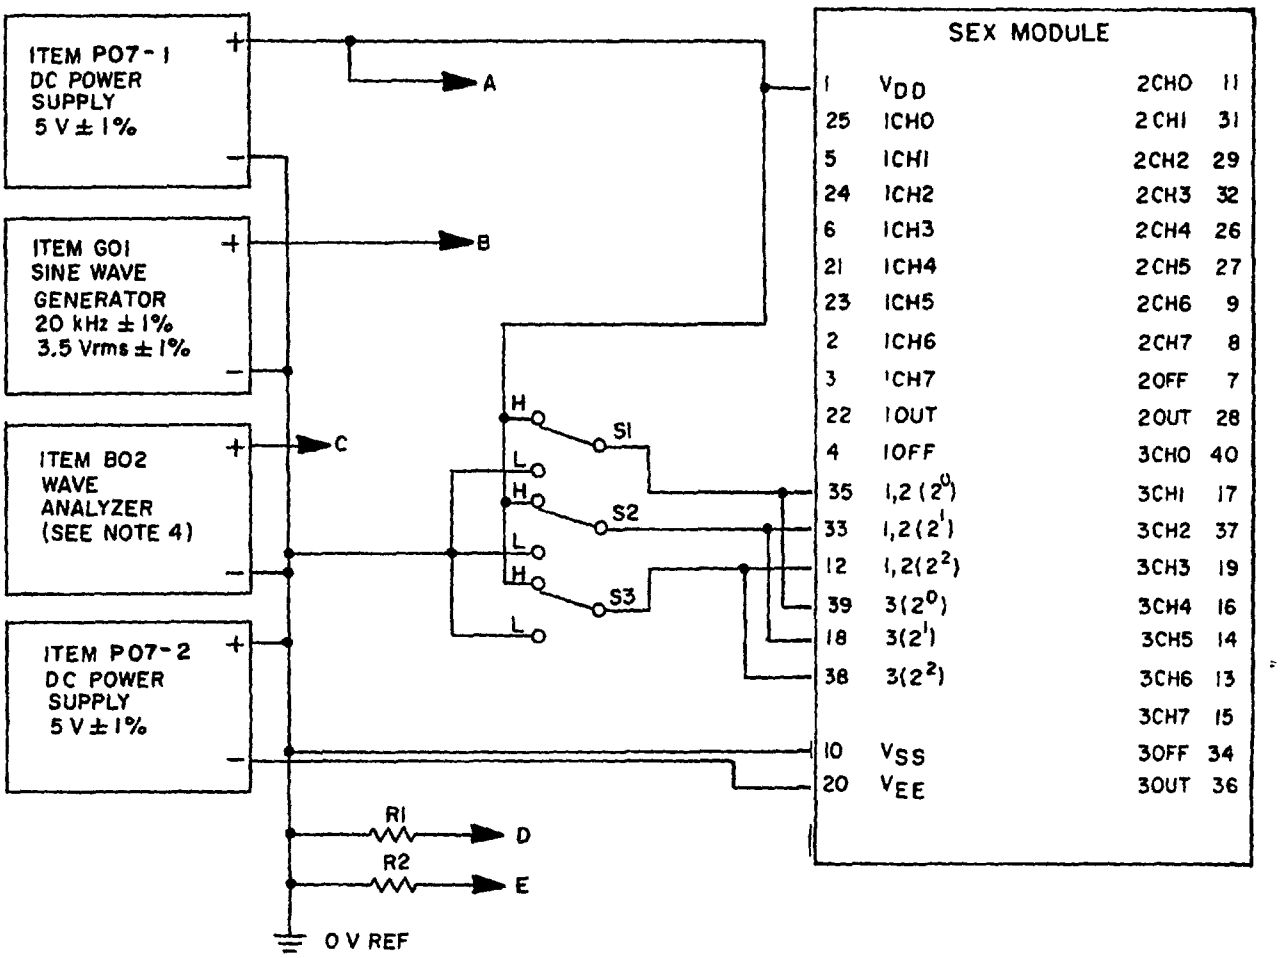

NOTES:
1. R1 = 20 kΩ ±5%, 1/8 W.
2. R2 = 500Ω ±5%, 1/2 W.
3. S1 = S2 = S3 = SPDT switch.
4. Tune item B02 to 20 kHz and fine tune for a maximum deflection.

FIGURE 13. Output crosstalk test circuit for table XII.


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:02Z
Check the source to verify that this is the current version before use.

TABLE XIII. Power supply ripple rejection test.

Test condition	Parameter	Switch position S3	Switch position S2	Switch position S1	Connect A to pin	Initial limits 25°±5°C ambient Min	Initial limits 25°±5°C ambient Max	Unit	Test figure
L1	Power supply ripple rejection 1/	L	L	L	1	0	700	µVrms	14
L2		L	L	H					
L3		L	H	L					
L4		L	H	H					
L5		H	L	L					
L6		H	L	H					
L7		H	H	L					
L8		H	H	H					
L9		L	L	L	20				
L10		L	L	H					
L11		L	H	L					
L12		L	H	H					
L13		H	L	L					
L14		H	L	H					
L15		H	H	L					
L16		H	H	H					

1/ 20 log $\frac{\text{(Test condition L)}}{700\ \text{mVrms}}$ = dB

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:02Z
Check the source to verify that this is the current version before use.

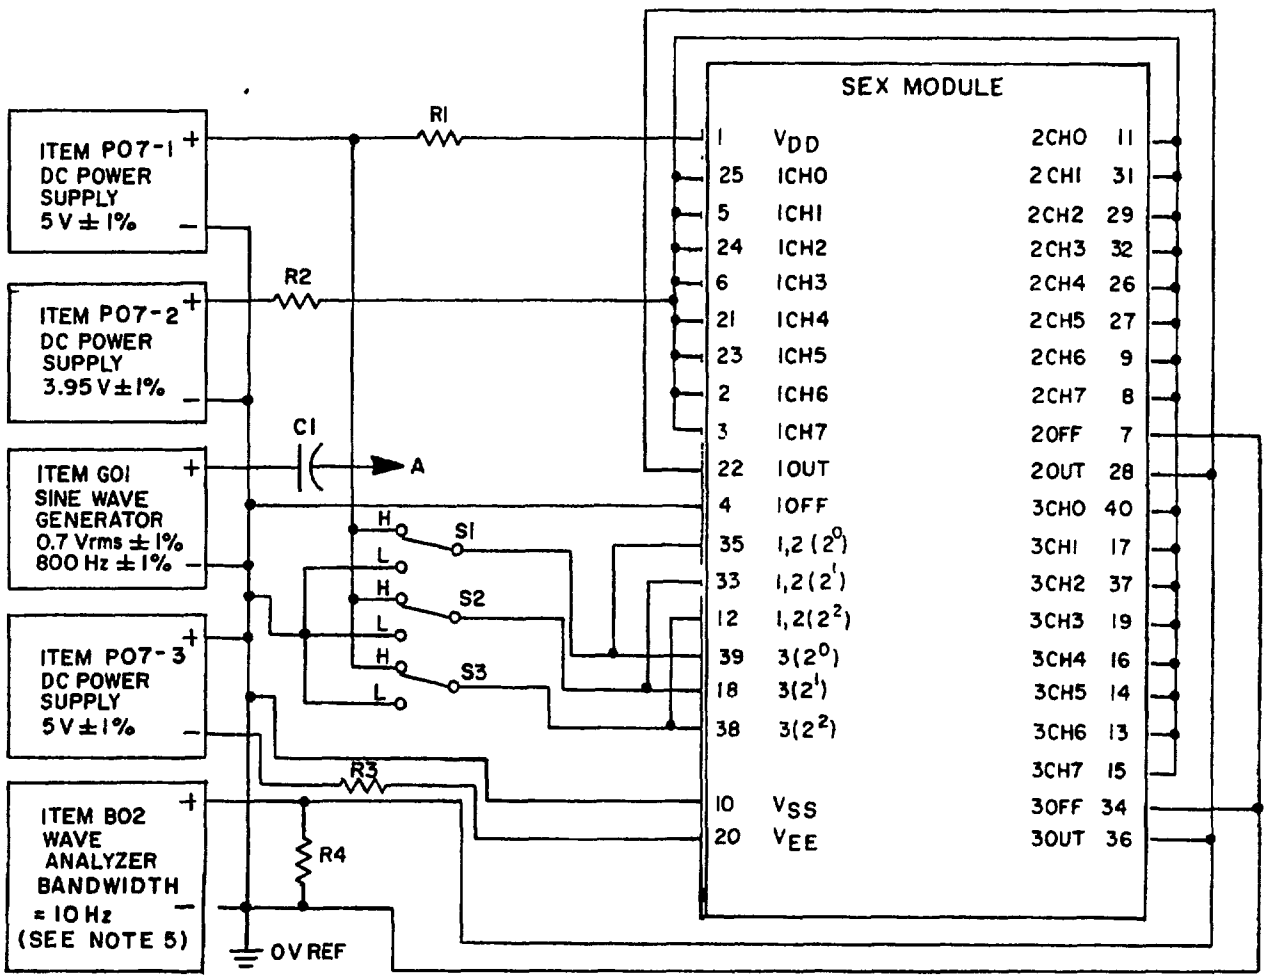

NOTES:
1. R1 = R3 = 1 kΩ ±1%, 1/8 W.
2. R2 = 50Ω ±5%, 1/8 W.
3. R4 = 100 kΩ ±5%, 1/8 W.
4. C1 = 1 µF ±10%, 20 V.
5. Tune item B02 to 800 Hz and fine tune for a maximum deflection.
6. S1 = S2 = S3 = SPDT switch.

FIGURE 14. Power supply ripple rejection test circuit for table XIII.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:02Z
Check the source to verify that this is the current version before use.

TABLE XIV. Distortion test.

Test condition	Parameter	Connect				Initial limits 25°+5°C ambient		Unit	Test figure
		A to pin	B to pin	C to pin	D to pin	Min	Max		
M1	Distortion	Open	4,7,34,35,33,12,39,18,38,5,24,6,21,23,2,3,11,31,29,32,26,27,9,8,40,17,37,19,16,14,13,15	25	22	0	1	%	15
M2		35	4,7,34,33,12,39,18,38,25,24,6,21,23,2,3,11,31,29,32,26,27,9,8,40,17,37,19,16,14,13,15	5					
M3		33	4,7,34,35,12,39,18,38,25,5,6,21,23,2,3,11,31,29,32,26,27,9,8,40,17,37,19,16,14,13,15	24					
M4		35,33	4,7,34,12,39,18,38,25,5,24,21,23,2,3,11,31,29,32,26,27,9,8,40,17,37,19,16,14,13,15	6					
M5		12	4,7,34,35,33,39,18,38,25,5,24,6,23,2,3,11,31,29,32,26,27,9,8,40,17,37,19,16,14,13,15	21					
M6		35,12	4,7,34,33,39,18,38,25,5,24,6,21,2,3,11,31,29,32,26,27,9,8,40,17,37,19,16,14,13,15	23					
M7		33,12	4,7,34,35,39,18,38,25,5,24,6,21,23,3,11,31,29,32,26,27,9,8,40,17,37,19,16,14,13,15	2					
M8		35,33,12	4,7,34,39,18,38,25,5,24,6,21,23,2,11,31,29,32,26,27,9,8,40,17,37,19,16,14,13,15	3					

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:02Z
Check the source to verify that this is the current version before use.

TABLE XIV. Distortion test - Continued.


Test condition	Parameter	Connect				Initial limits 25°±5°C ambient		Unit	Test figure
		A to pin	B to pin	C to pin	D to pin	Min	Max		
M9	Distortion	Open	4,7,34,35,33,12,39,18,38,25,5,24,6,21,23,2,3,31,29,32,26,27,9,8,40,17,37,19,16,14,13,15	11	28	0	1	%	15
M10		35	4,7,34,33,12,39,18,38,25,5,24,6,21,23,2,3,11,29,32,26,27,9,8,40,17,37,19,16,14,13,15	31					
M11		33	4,7,34,35,12,39,18,38,25,5,24,6,21,23,2,3,11,31,32,26,27,9,8,40,17,37,19,16,14,13,15	29					
M12		35,33	4,7,34,12,39,18,38,25,5,24,6,21,23,2,3,11,31,29,26,27,9,8,40,17,37,19,16,14,13,15	32					
M13		12	4,7,34,35,33,39,18,38,25,5,24,6,21,23,2,3,11,31,29,32,27,9,8,40,17,37,19,16,14,13,15	26					
M14		35,12	4,7,34,33,39,18,38,25,5,24,6,21,23,2,3,11,31,29,32,26,9,8,40,17,37,19,16,14,13,15	27					
M15		33,12	4,7,34,35,39,18,38,25,5,24,6,21,23,2,3,11,31,29,32,26,27,8,40,17,37,19,16,14,13,15	9					
M16		35,33,12	4,7,34,39,18,38,25,5,24,6,21,23,2,3,11,31,29,32,26,27,9,40,17,37,19,16,14,13,15	8					

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:02Z
Check the source to verify that this is the current version before use.

TABLE XIV. Distortion test - Continued.

Test condition	Parameter	Connect				Initial limits 25°±5°C ambient		Unit	Test figure
		A to pin	B to pin	C to pin	D to pin	Min	Max		
M17	Distortion	Open	4,7,34,35,33,12,39,18,38,25,5,24,6,21,23,2,3,11,31,29,32,26,27,9,8,17,37,19,16,14,13,15	40	36	0	1	%	15
M18		39	4,7,34,35,33,12,18,38,25,5,24,6,21,23,2,3,11,31,29,32,26,27,9,8,40,37,19,16,14,13,15	17					
M19		18	4,7,34,35,33,12,39,38,25,5,24,6,21,23,2,3,11,31,29,32,26,27,9,8,40,17,19,16,14,13,15	37					
M20		39,18	4,7,34,35,33,12,38,25,5,24,6,21,23,2,3,11,31,29,32,26,27,9,8,40,17,37,16,14,13,15	19					
M21		38	4,7,34,35,33,12,39,18,25,5,24,6,21,23,2,3,11,31,29,32,26,27,9,8,40,17,37,19,14,13,15	16					
M22		39,38	4,7,34,35,33,12,18,25,5,24,6,21,23,2,3,11,31,29,32,26,27,9,8,40,17,37,19,16,13,15	14					
M23		18,38	4,7,34,35,33,12,39,25,5,24,6,21,23,2,3,11,31,29,32,26,27,9,8,40,17,37,19,16,14,15	13					
M24		39,18,38	4,7,34,35,33,12,25,5,24,6,21,23,2,3,11,31,29,32,26,27,9,8,40,17,37,19,16,14,13	15					

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:02Z
Check the source to verify that this is the current version before use.

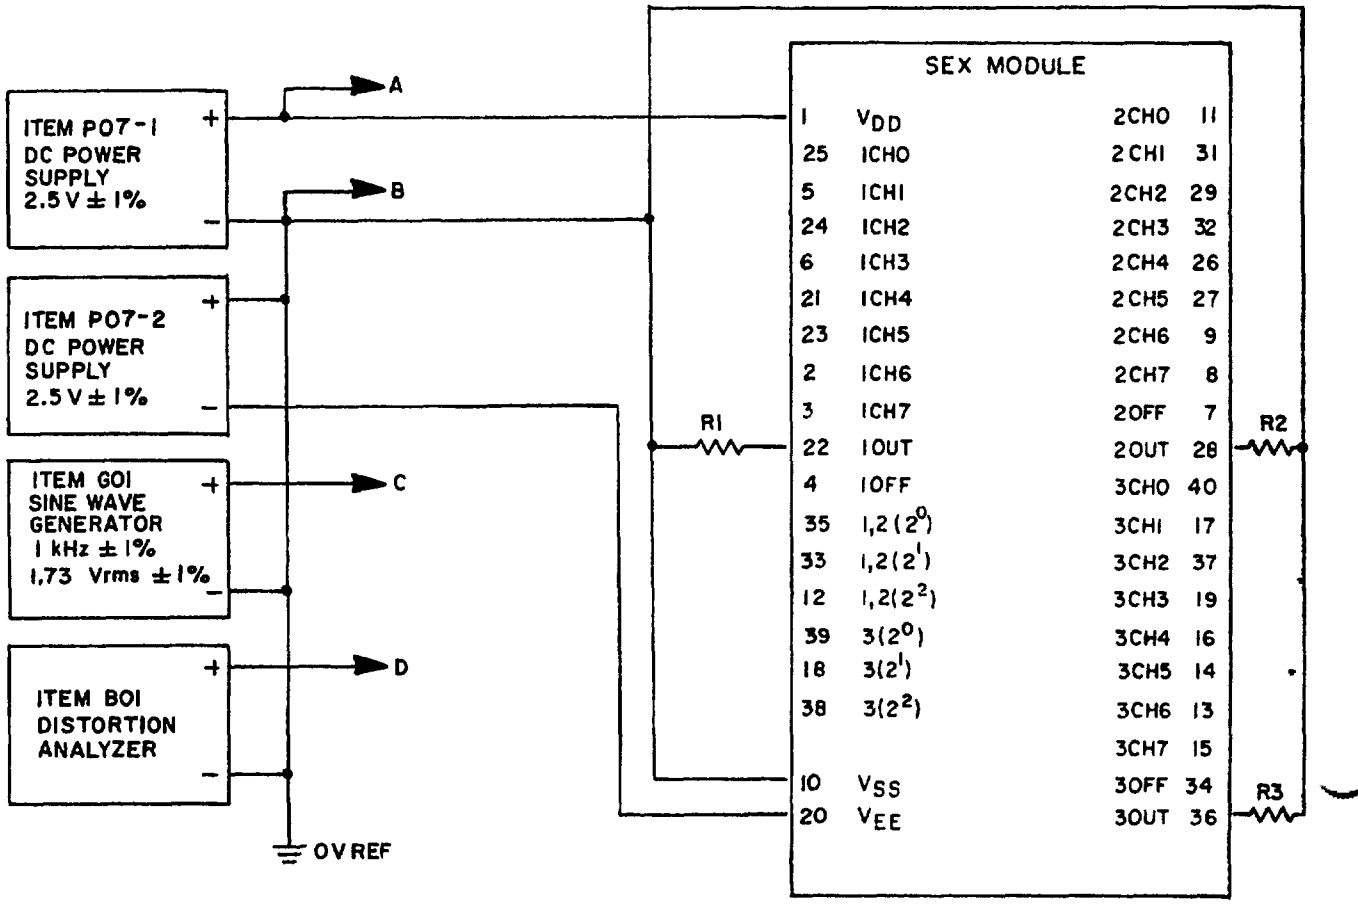

NOTES.
1. R1 = R2 = R3 = 10 kΩ ±5%, 1/4 W.
2. Distortion (D) = Output (D_0) - Input (D_1).

FIGURE 15. Distortion test circuit for table XIV.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:02Z
Check the source to verify that this is the current version before use.

TABLE XV. Power supply filter capacitance and input capacitance test.


Test condition	Parameter	Connect			Initial limits 25°±5°C ambient		Unit	Test figure
		A to pin	B to pin	C to pin	Min	Max		
N1	Power supply filter capacitance	Open	1	10	0.075	0.125	µF	16
N2	Power supply filter capacitance	Open	10	20	0.075	0.125	µF	
P1	Input capacitance	35	Open	Open	0	18	pF	
P2		33						
P3		12						
P4		39						
P5		18						
P6		38						
P7		4						
P8		7						
P9		34						
P10		25						
P11		5						
P12		24						
P13		6						
P14		21						
P15		23						

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:02Z
Check the source to verify that this is the current version before use.

TABLE XV. Power supply filter capacitance and input capacitance test - Continued.

Test condition	Parameter	Connect			Initial limits 25°+5°C ambient		Unit	Test figure
		A to pin	B to pin	C to pin	Min	Max		
P16	Input capacitance	2	Open	Open	0	18	pF	16
P17		3						
P18		11						
P19		31						
P20		29						
P21		32						
P22		26						
P23		27						
P24		9						
P25		8						
P26		40						
P27		17						
P28		37						
P29		19						
P30		16						
P31		14						
P32		13						
P33		15						

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:02Z
Check the source to verify that this is the current version before use.

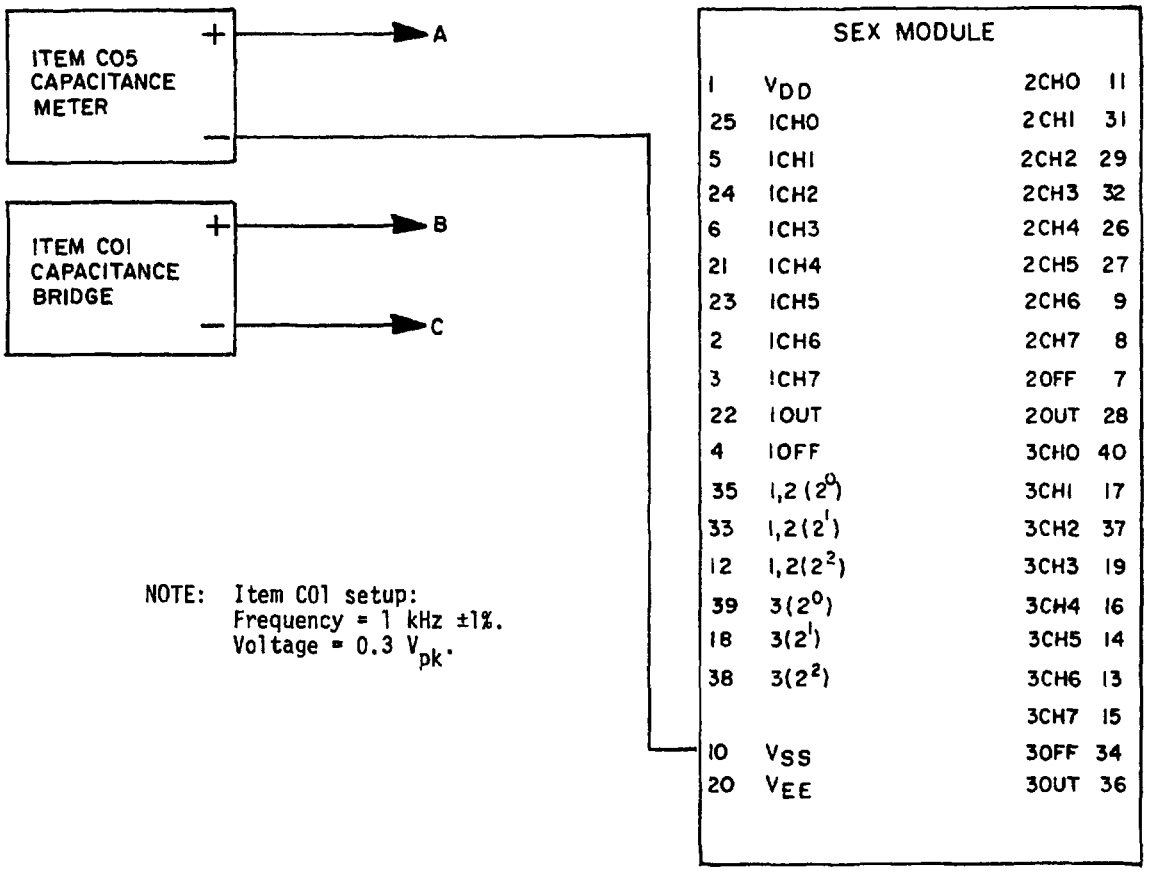

NOTE: Item C01 setup:
Frequency = 1 kHz ±1%.
Voltage = 0.3 V_{pk}.

FIGURE 16. Power supply filter capacitance and input capacitance test circuit for table XV.

☆U.S. GOVERNMENT PRINTING OFFICE: 1981—703-023/6673

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:02Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE. This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MODULES, STANDARD ELECTRONIC
MULTIPLEXER, ANALOG, KEY CODE SEX MIL-M-28787/88A

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*	TELEPHONE NO.
	DATE

DD FORM 1 OCT 76 1426 EDITION OF 1 JAN 72 MAY BE USED UNTIL EXHAUSTED

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:02Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

BUSINESS REPLY MAIL

FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Commander
Naval Electronic Systems Command
Attn; ELEX 8111
Washington, DC 20360

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:02Z
Check the source to verify that this is the current version before use.