
MILITARY SPECIFICATION SHEET

ATTENUATORS, VARIABLE (COAXIAL),
FREQUENCY RANGE DC TO 1 MHZ
(LOW FREQUENCY)

This specification is approved for use by all Departments and Agencies of the Department of Defense

The complete requirements for procuring the attenuators described herein shall consist of this document and the latest issue of Specification MIL-A-24215.

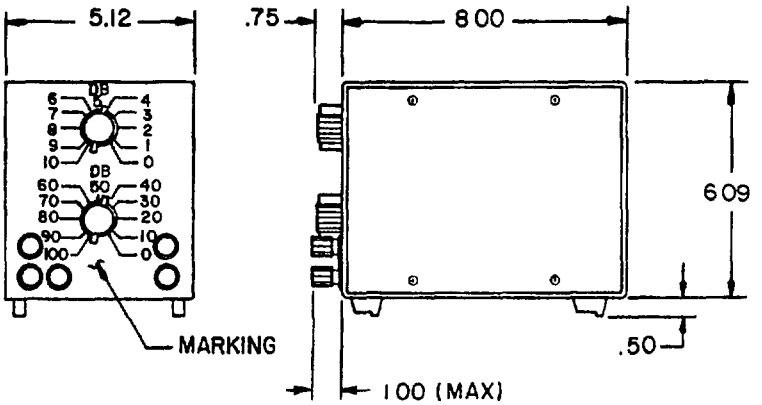

INCHES	MM
.50	12.70
.75	19.05
1.00	25.40
5.12	130.05
6.09	154.69
8.00	203.20

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25 4 mm.
3. Accuracy of settings·
   A. 0-10 dB section. From dc to 100 kHz the error shall be less than ±0.125 dB at any step. From 100 kHz to 1 MHz the error shall be less than ±0.25 dB at any step.
   B 0-100 dB section. 0-60 dB settings. From dc to 100 kHz the error shall be less than ±0.25 dB for any of these (0-60 dB) settings From 100 kHz to 1 MHz the error shall be less than ±0.5 dB for any of these (0-60 dB) settings.
   C. 70 to 100 dB settings. From dc to 100 kHz the error shall be less than ±0.5 dB for any of these (70-100 dB) settings and from 100 kHz to 1 MHz, the error shall be less than ±0.75 dB for any of these (70-100 dB) settings.

FIGURE 1. Dimensions and configuration for part number M24215/11-001.

FSC 5985

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:01Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Operating frequency: DC to 1 MHz.

Input and output impedance: 600 ohms.

Connectors: Accommodate Banana plugs.

Attenuation range: 0 to 100 dB in 1 dB and 10 dB steps.

Attenuation accuracy:
10 dB section. < ±0.25 dB per step.
100 dB section: < ±0.75 dB per step.

DC isolation: Signal ground may be ±500 Vdc above chassis

Input maximum average power: 5 watts (55 Vdc or rms)

Operating ambient temperature: -20°C to +65°C.

Detent: Positive ball type indexing with fixed stops at end of travel.

Final finish: All exposed surfaces and unexposed aluminum surfaces shall be chemically treated per MIL-C-5541, type 1, grade B, class 2

Weight: 4 lbs (1.8 Kg)

Frequency deviation:
10 dB section. < ±0.5 dB, dc to 100 kHz.
100 dB section: < ±1.0 dB, dc to 100 kHz

Part number: M24215/11-001.

NOTE. Attenuators covered by this specification sheet are substitutable for the following commercial types:

Part number M24215/11-	FSN 6625	Manufacturer's code	Commercial type
001	215-4931	28480	350D
001	215-4931	77068	3190302

Custodians:
Army - EL
Navy - EC
Air Force - 85

Review activities:
Army - MI, SG, MU
Navy - SH
Air Force - 11, 80
DSA - ES

User activities.
Army - SM
Navy - AS, OS, MC
Air Force - 19

Preparing activity
Navy - EC

Agent.
DSA - ES

(Project 5985-0792)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:01Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated Fold on lines on reverse side, staple in corner, and send to preparing activity Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION

ORGANIZATION

CITY AND STATE | CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2 COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3 IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4 REMARKS *(Attach any pertinent data which may be of use in improving this specification If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)* | DATE

DD FORM 1 JAN 66 1426 REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED

S/N-0102-014-1801 C-25254

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:01Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY
NAVAL ELECTRONIC SYSTEMS COMMAND
WASHINGTON, D. C. 20360

POSTAGE AND FEES PAID
NAVY DEPARTMENT
DOD 316

OFFICIAL BUSINESS

COMMANDER
NAVAL ELECTRONIC SYSTEMS COMMAND
DEFENSE STANDARDIZATION PROGRAM BRANCH
DEPARTMENT OF THE NAVY
WASHINGTON, D. C. 20360

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:01Z
Check the source to verify that this is the current version before use.