
MILITARY SPECIFICATION SHEET

ATTENUATORS, VARIABLE (COAXIAL, STEP)
CLASS 4 (TNC)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the attenuators described herein shall consist of this document and the latest issue of Specification MIL-A-24215.

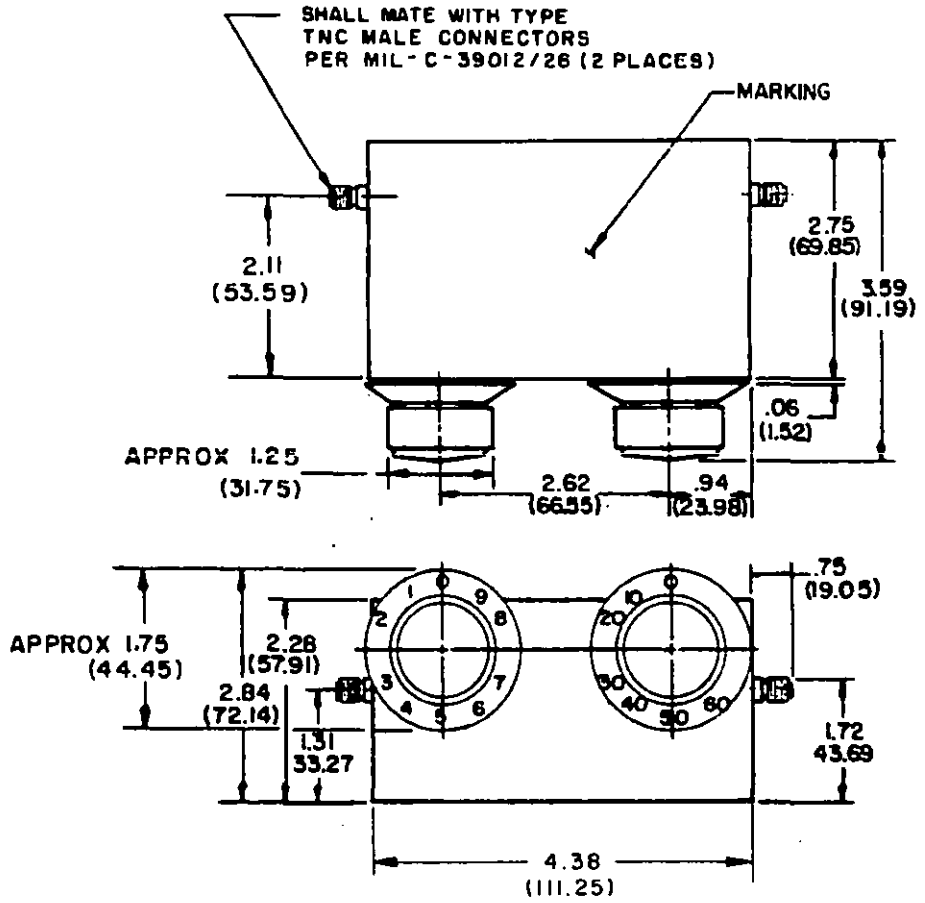

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Metric equivalents are in parentheses.
4. Unless otherwise specified, tolerance is ±.03 (.8 mm).

FIGURE 1. Dimensions and configuration for part number M24215/14-01.

FSC 5985

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:02Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction: See figure 1.

Nominal impedance: 50 ohms.

Frequency range: DC-12.4 GHz.

Attenuation range: 0-69 dB in 1 dB steps.

Attenuation deviation relative (dB):

Step	Deviation
1-9	±0.4
10-19	±1.0
20-29	±1.2
30-39	±1.4
40-49	±1.5
50-59	±1.7
60-69	±1.8

Resettability (dB): <0.05

Insertion loss: 0.8 dB maximum.

VSWR: 1.50:1 maximum.

Temperature coefficient: 0.0001 dB/dB/°C.

Input power (minimum): 2 watts average, 200 watts peak at any setting.

Weight: 3.2 pounds (approximate).

Stops: The mechanical stops required are to be located internal to the unit.

Finish:
Aluminum parts: Shall be protected with a chemical film treatment in accordance with MIL-C-5541, class 3.
Stainless steel parts: Shall be passivated in accordance with MIL-S-5002.

Part number: M24215/14-01

NOTE: Attenuators covered by this specification sheet are substituted for the following manufacturer's part number. This information in no way implies that the manufacturer's part is suitable as a substitute for the military part number.

Dash number	Manufacturer's code	Manufacturer's part number	FSN
01	19315	2132000-1	
01	99899	23558	

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - AR, MI, SL
Air Force - 11
DLA - ES

User activities:
Army - SM
Navy - AS, MC, OS, SH

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5985-0928-3)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:02Z
Check the source to verify that this is the current version before use.