
MILITARY SPECIFICATION SHEET

ATTENUATORS, VARIABLE (WAVEGUIDE, ROTATING VANE)
CLASS 14

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the attenuators described herein shall consist of this document and the latest issue of Specification MIL-A-24215.

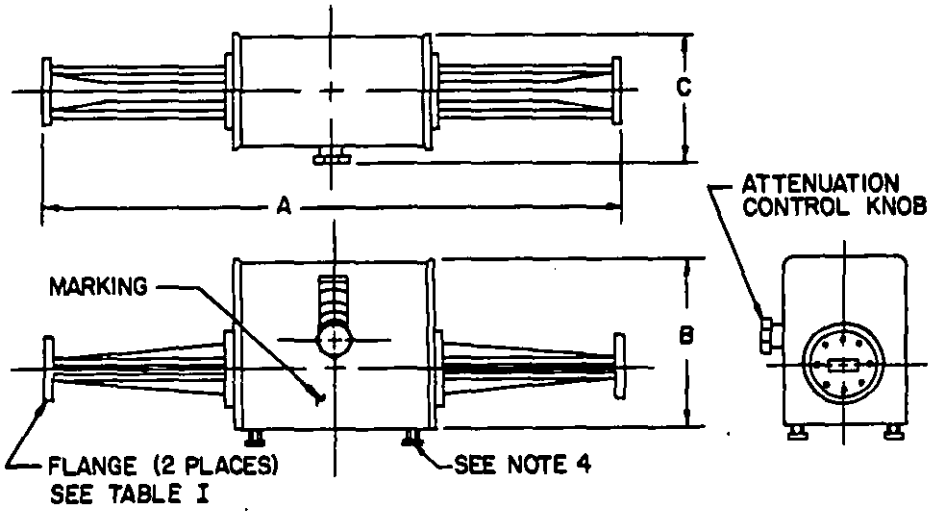

Part No. M24215/5-	A ±.03 (.76)	B ±.06 (1.52)	C ±.06 (1.52)
001	31.62 (803.15)	9.62 (244.35)	7.75 (196.85)
002	25.12 (638.05)	7.94 (201.68)	6.50 (165.10)
003	15.62 (396.75)	7.62 (193.55)	4.69 (119.13)
004	12.50 (317.50)	7.75 (196.85)	4.75 (120.65)


NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Metric equivalents are in parentheses.
4. Threaded adjustable legs - 4 required, adjustable from .25 (6.35 mm) to .875 (22.23 mm).

Ⓑ FIGURE 1. Dimensions and configuration for part number M24215/5-001, 002, 003 and 004.

Ⓑ denotes changes.

FSC 5985

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:00Z
Check the source to verify that this is the current version before use.

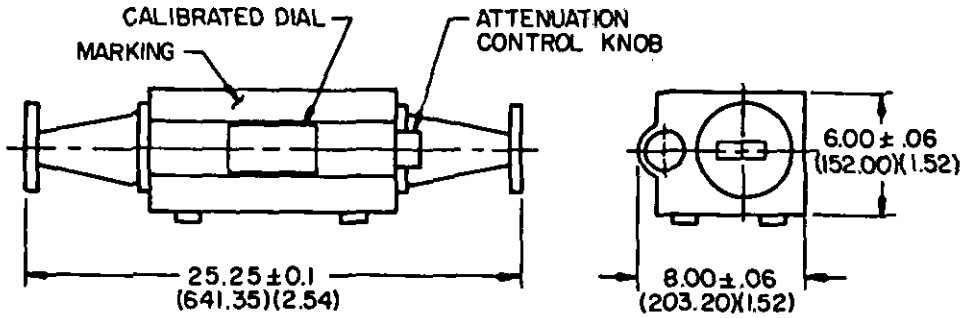

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Metric equivalents are in parentheses.

Ⓑ FIGURE 2. Dimensions and configuration for part number M24215/5-005.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:00Z
Check the source to verify that this is the current version before use.

Ⓑ REQUIREMENTS:

Dimensions and configuration: See figures 1 and 2.

Electrical requirements: See table I.

Dial: 001, 002, 003 and 004:
Numerals and graduations engraved on a clear plastic disk and filled with black paint, with a spiral scale which increases in diameter with a counterclockwise rotation as a white background moves toward the outside of the disk to indicate an increasing value of attenuation. Accuracy of the scale, ±2 percent or 0.1 dB, whichever is greater, across the entire frequency range. Rotation of 1040° for 0 to 50 dB.

Dial: 005:
0-90° calibrated in 0.01° increments. ±1 percent reading in dB or 0.1 dB whichever is greater.

Final finish: Blue enamel.

Part number: See figure 1 and table I.

TABLE I. Electrical requirements.

Part number M24215 /5-	Figure	Freq. range (GHz) 1/	B Flange	Atten. range (dB)	VSWR (max)	Insertion loss (max at min. atten. setting) (dB)	Calibration accuracy (dB)	Max input (watts) (average)	Nominal operating temp. range (°C)	Weight (max)		
										lbs	Kg	oz
001	1	3.95-5.85	M3922/57-001 (UG-407/U)	0-50	1.15:1	<1	±2% or 0.1 dB	15	0 - +65	25	11.34	400
002	1	5.3-8.2	M3922/55-002 (UG-441/U)	0-50	1.15:1	<1	±2% or 0.1 dB	10	0 - +65	15	6.80	240
003	1	8.2-12.4	M3922/53-003 (UG-135/U)	0-50	1.15:1	<1	±2% or 0.1 dB	10	0 - +65	7	3.18	112
004	1	12.4-18.0	M3922/53-006 (UG-1665/U)	0-50	1.15:1	<1	±2% or 0.1 dB	5	0 - +65	7	3.18	112
005	2	2.6-3.95	M3922/56-001 (UG-53/U)	0-60	1.15:1	<1	±1% or 0.1 dB	10	0 - +65	20	9.07	320

NOTE: 1/ Continuously variable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:00Z
Check the source to verify that this is the current version before use.

Cross reference data: Part number M24215/5-001 is interchangeable with type designation CN-1139/U.

NOTE: Attenuators covered by this specification sheet are substitutable for the following commercial types:

Part number M24215/5-	FSN 5985	Manufacturer's code	Commercial type
001	771-8421	80058 28480	CN908U G382A
001	594-5378	28480	G375A
(B) 002		28480	J382A
(B) 003		28480	X382A
(B) 004		28480	P382A
(B) 005		28480	S382C

Custodians:
Army - EL
Navy - EC
Air Force - 85

Review activities:
Army - SG
Navy - AS, OS
Air Force - 11, 17, 80
DSA - ES

User activities:
Army - AV
Navy - MC, CG, SH
Air Force - 19

Preparing activity:
Navy - EC

Agent:
DSA - ES

(Project 5985-0795)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:00Z
Check the source to verify that this is the current version before use.