MIL-A-24215/6A
17 September 1973
SUPERSEDING
MIL-A-24215/6
20 July 1966
MIL-A-24215/7(NAVY)
6 December 1968


MILITARY SPECIFICATION SHEET

ATTENUATORS, VARIABLE (COAXIAL, STEP)

CLASS 7

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the attenuators described herein shall consist of this document and the latest issue of Military Specification MIL-A-24215.

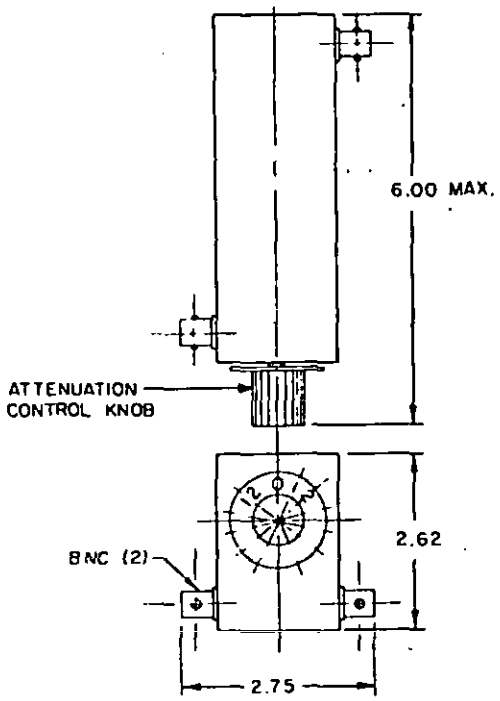

INCHES	MM
.06	1.52
2.62	66.55
2.75	69.85
6.00	152.40

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerance is ±.06 (1.52 mm).

FSC 5985

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:00Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Operating frequency: DC to 1.0 GHz.

Nominal impedance: 50 ohms.

Insertion loss:

f	Loss
.1 GHz	0.25 dB (max)
.5 GHz	0.75 dB (max)
1.0 GHz	1.50 dB (max)

Voltage standing wave ratio:

Below f	VSWR
.25 GHz	1.2 (max)
.50 GHz	1.3 (max)
1.00 GHz	1.5 (max)

Dial: Aluminum with black filled engraved numerals as shown with 13 of 14 positions used. Detent for positive stop at back position. Accuracy at 0.5 GHz ±0.25 dB maximum, overall.

Attenuation range: See table I.

Maximum average power: 0.5 watt at 350 volts peak.

Maximum weight: 1.5 pounds.

Final finish: Blue enamel.

Connectors: Type BNC female in accordance with MIL-C-39012/19.

Part number: M24215/6- (dash number from table I).

Variation of attenuation: See table I.

TABLE I. Electrical requirements.

Dash number	Attenuation range	Variation of attenuation		
		f	Attenuator range	Variation (max)
001	0-12 dB (in 1 dB steps)	dc to 1 kHz dc to .5 GHz dc to 1 GHz	Full Full Full	±0.1 dB ±0.25 dB ±0.35 dB
002	0-120 dB (in 10 dB steps)	dc to 1 kHz dc to 1 GHz dc to 1 GHz	Full 0-90 dB 91-120 dB	±0.3 dB ±1.5 dB ±3.0 dB

TABLE II. Cross reference data.

Part number	Former part number	Type
M24215/6 001 002	M24215/7-001	CN- 1140/U 1128/U 1/

1/ Erroneously listed as CN-970/U on MIL-A-24215/7.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:00Z
Check the source to verify that this is the current version before use.

NOTE: Attenuators covered by this specification sheet are substitutable for the following commercial types:

Part number	Manufacturer's code	Commercial type	FSN
M24215/6-001	28480	355C	5985-839-5858
M24215/6-001	38597	64B4-1	5985-839-5858
M24215/6-001	12598	AT200SR	5985-993-1377
M24215/6-001	28480	355C	5985-993-1377
M24215/6-001	80058	CN970u	5985-993-1377
M24215/6-001	80138	467A	5985-993-1377
M24215/6-002	28480	355D	5985-839-5859
M24215/6-002	38597	64B4-2	5985-839-5859
M24215/6-002	10001	0S080430	5985-879-4647
M24215/6-002	16055	CC107B	5985-879-4647
M24215/6-002	28480	355B	5985-879-4647
M24215/6-002	12598	AT201SR	5985-957-1860
M24215/6-002	28480	355D	5985-957-1860
M24215/6-002	80064	CAQI355D	5985-957-1860
M24215/6-002	80058	CN1128u	5985-957-1860
M24215/6-002	80138	464A	5985-957-1860

Custodians:
Army - EL
Navy - EC
Air Force - 80

Review activities:
Army - SL
Navy - AS, OS
Air Force - 11, 17
DSA - ES

User activities:
Army - AV
Navy - MC, CG, SH
Air Force - 19

Preparing activity:
Navy - EC

Agent:
DSA - ES

(Project 5985-0742-3)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:00Z
Check the source to verify that this is the current version before use.