INCH-POUND
MIL-DTL-24211/2E
w/AMENDMENT 1
13 June 2023
SUPERSEDING
MIL-DTL-24211/2E
6 November 2013

DETAIL SPECIFICATION SHEET

GASKETS, WAVEGUIDE FLANGE (FLAT FACE)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the gaskets described herein shall consist of this specification sheet and MIL-DTL-24211.

REQUIREMENTS:

Dimensions and configuration: See figure 1.


Reference data: See table I.

Part number: M24211/2-(number taken from figure 1).

TABLE I. Reference data.

Part number M24211/2-	Used with flanges M3922/	Part number M24211/2-	Used with flanges M3922/
001	52-001, 52-002	010	52-019, 52-020
002	52-003, 52-004	011	52-021, 52-022
003	52-005, 52-006	012	XX-001
004	52-007, 52-008	013	XX-002
005	52-009, 52-010	014	XX-003
006	52-011, 52-012	015	XX-004
007	52-013, 52-014	016	XX-005
008	52-015, 52-016	017	XX-006
009	52-017, 52-018	018	XX-007
		019	75-15, 75-16


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T19:58Z
Check the source to verify that this is the current version before use.

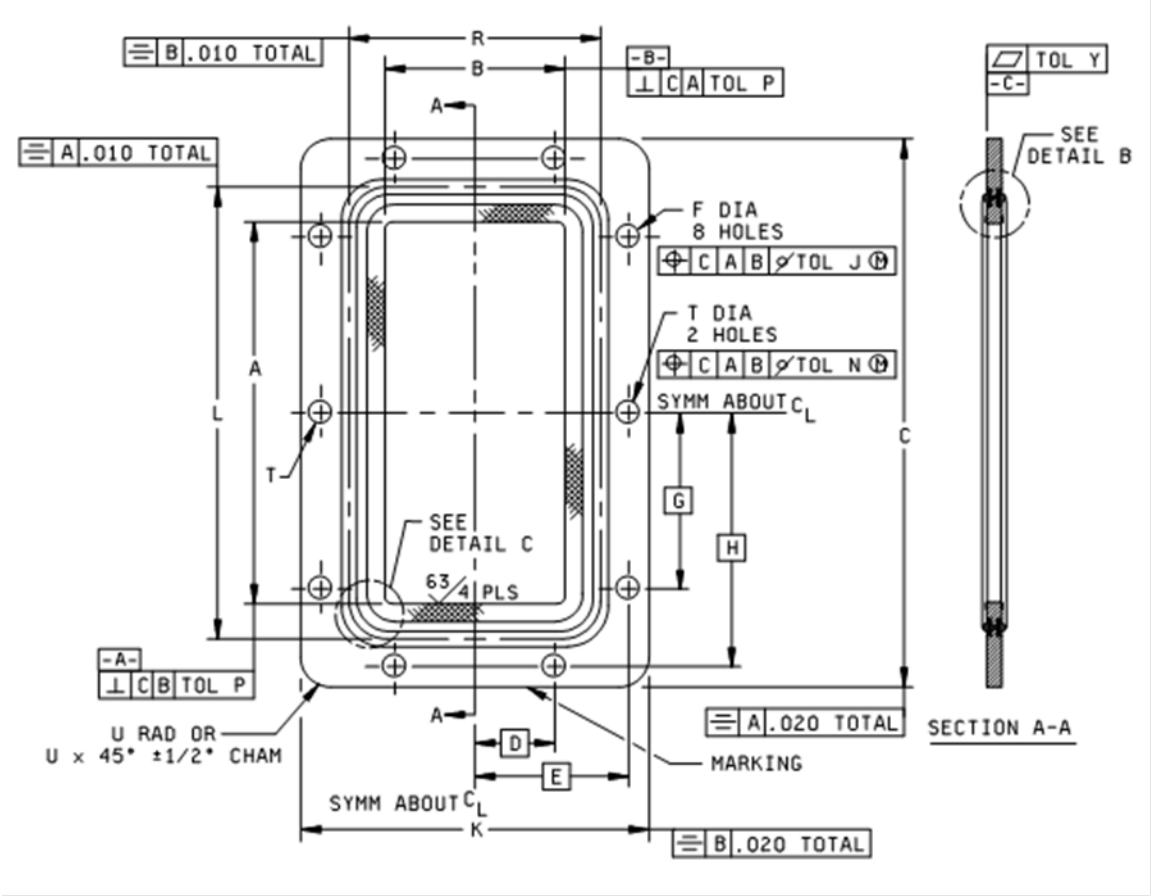

Configuration 1. Gasket configuration for part numbers 001-011.

FIGURE 1. Gasket.


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T19:58Z
Check the source to verify that this is the current version before use.

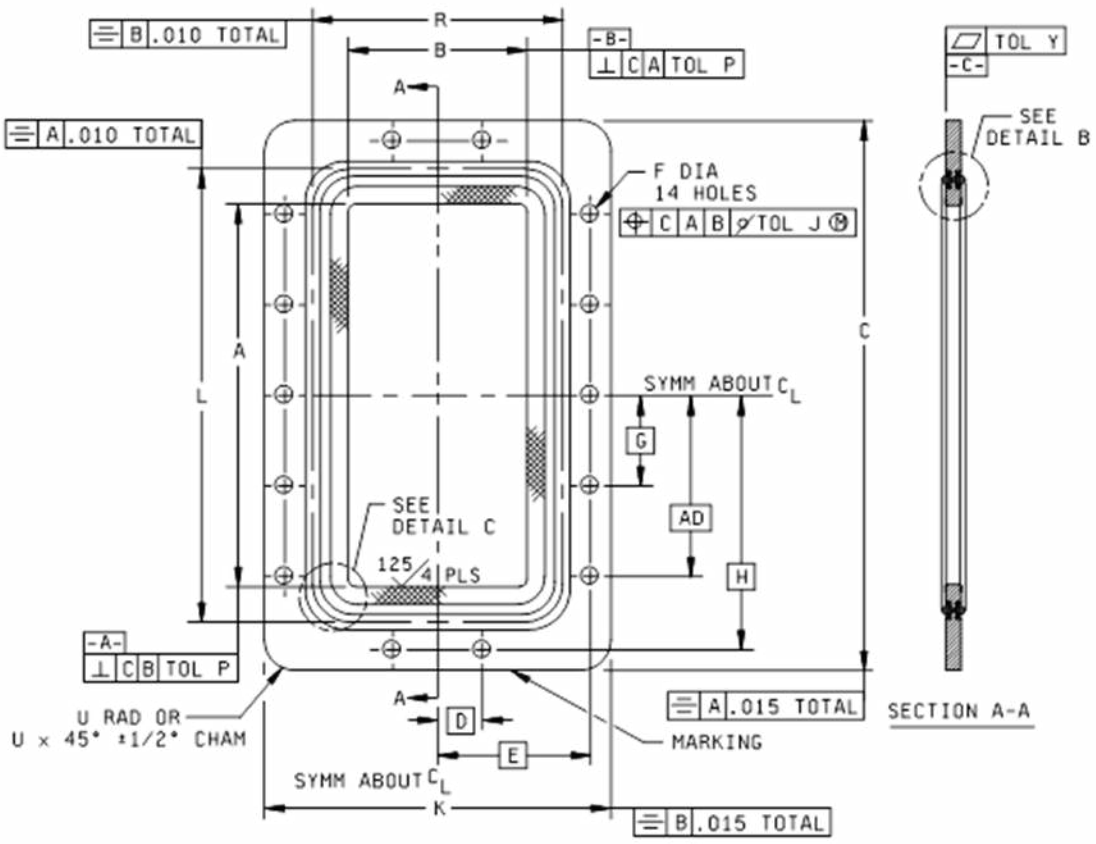

Configuration 2. Gasket configuration for part number 012.

FIGURE 1. Gasket - Continued.


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T19:58Z
Check the source to verify that this is the current version before use.

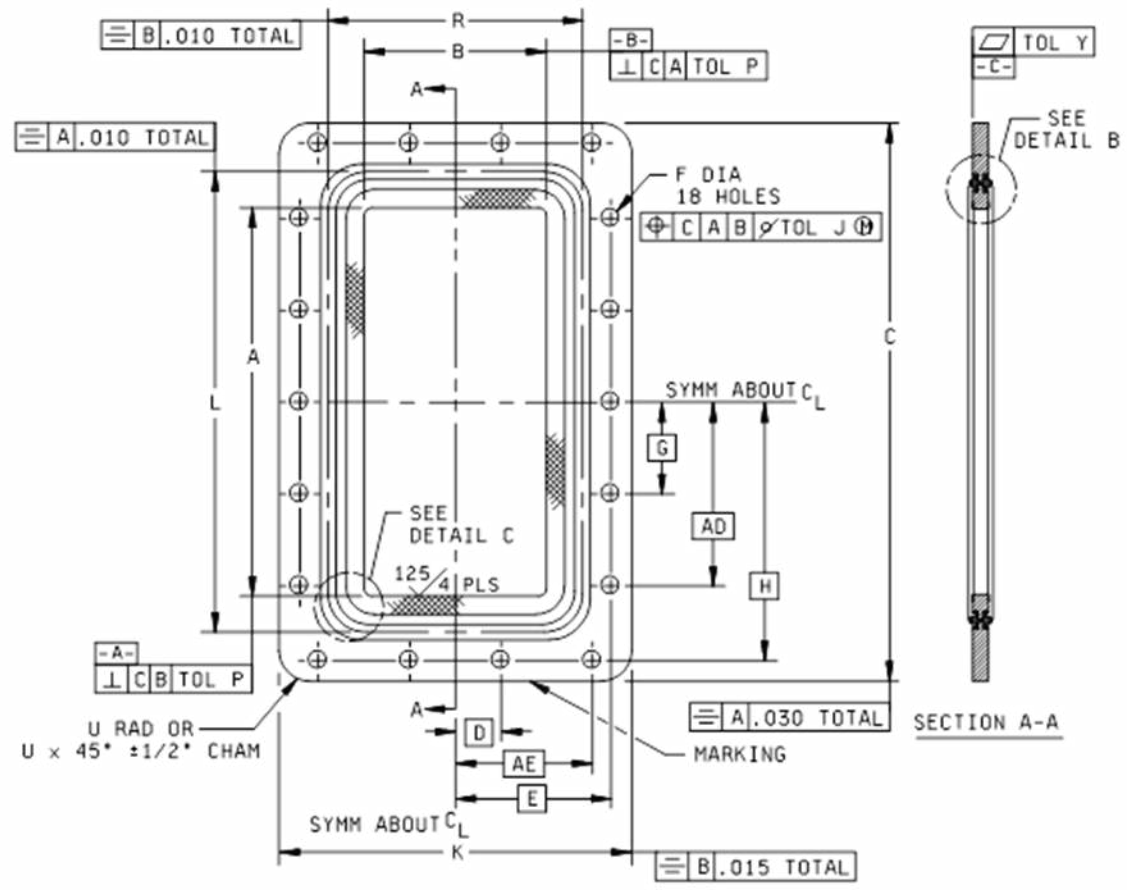

Configuration 3. Gasket configuration for part number 013.

FIGURE 1. Gasket - Continued.


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T19:58Z
Check the source to verify that this is the current version before use.

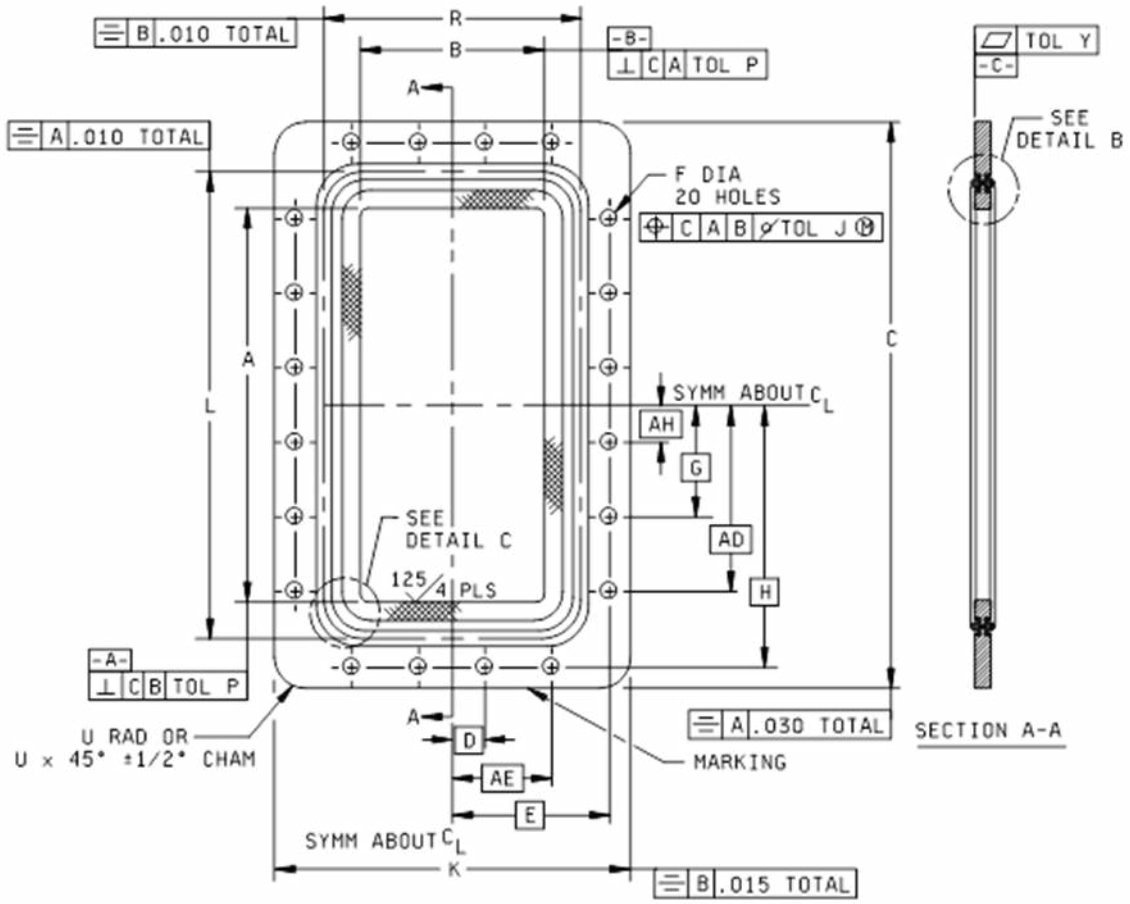

Configuration 4. Gasket configuration for part number 014.

FIGURE 1. Gasket - Continued.


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T19:58Z
Check the source to verify that this is the current version before use.

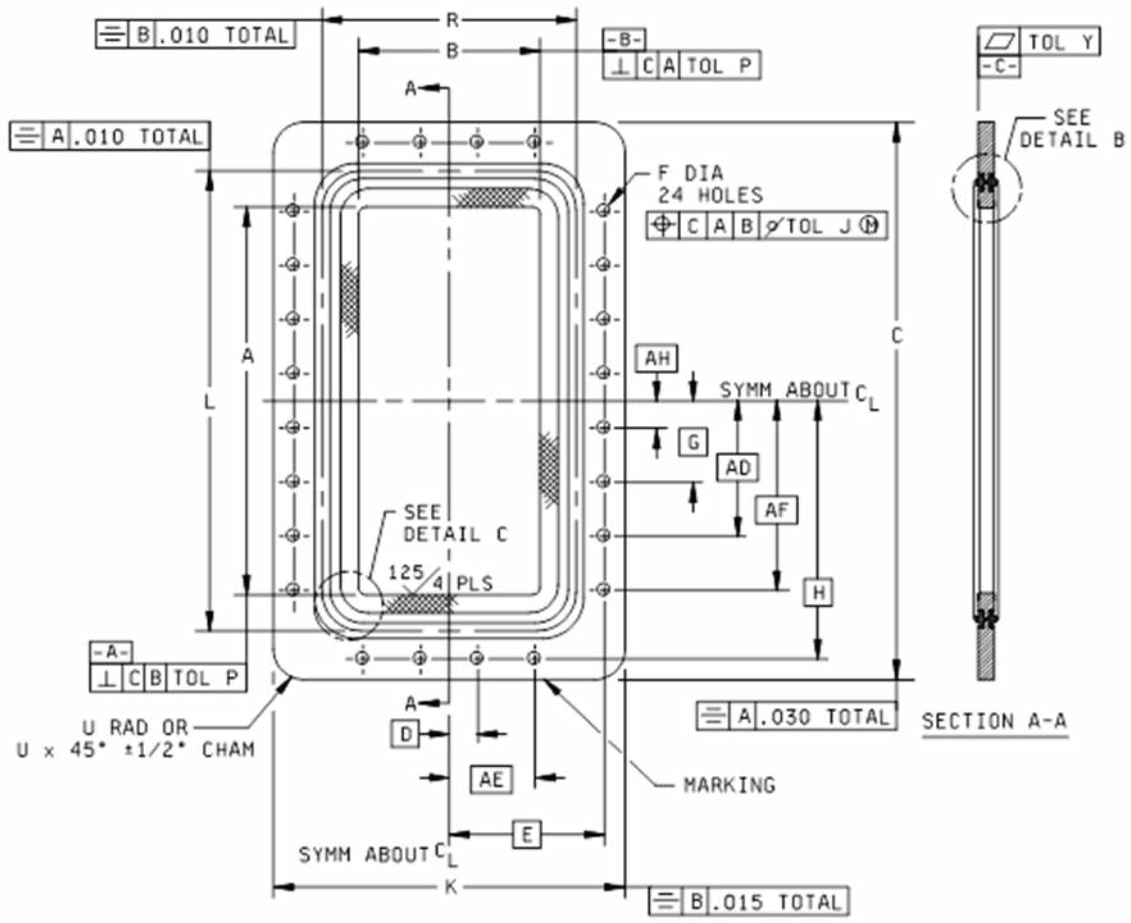

Configuration 5. Gasket configuration for part number 015.

FIGURE 1. Gasket - Continued.


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T19:58Z
Check the source to verify that this is the current version before use.

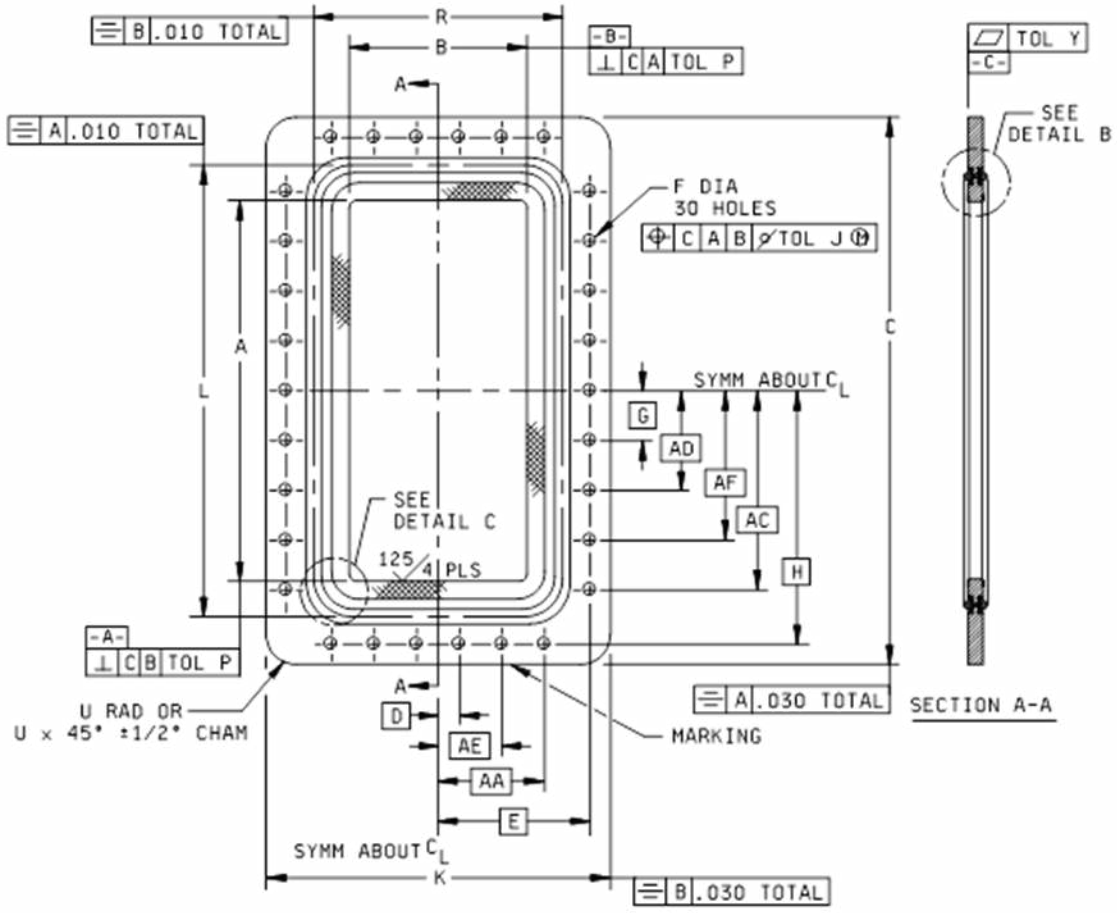

Configuration 6. Gasket configuration for part number 016.

FIGURE 1. Gasket - Continued.


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T19:58Z
Check the source to verify that this is the current version before use.

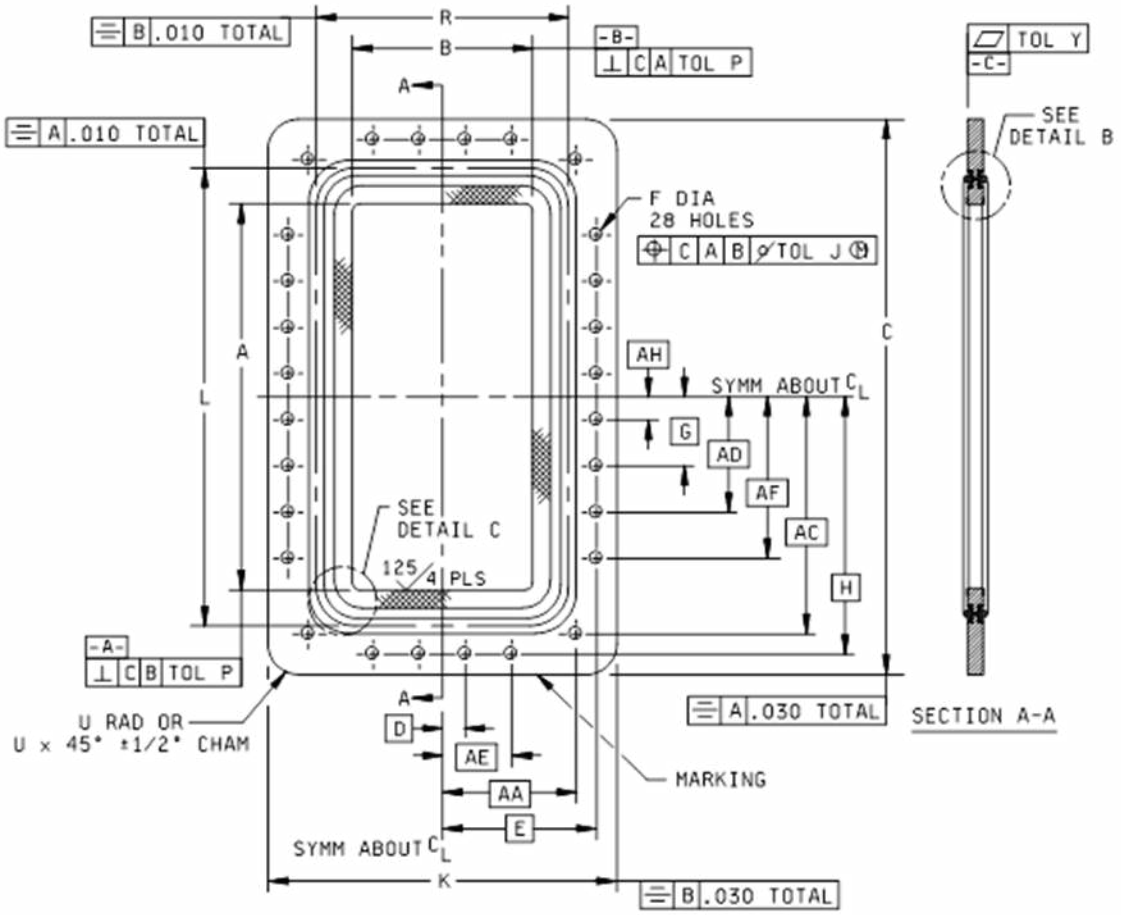

Configuration 7. Gasket configuration for part number 017.

FIGURE 1. Gasket - Continued.


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T19:58Z
Check the source to verify that this is the current version before use.

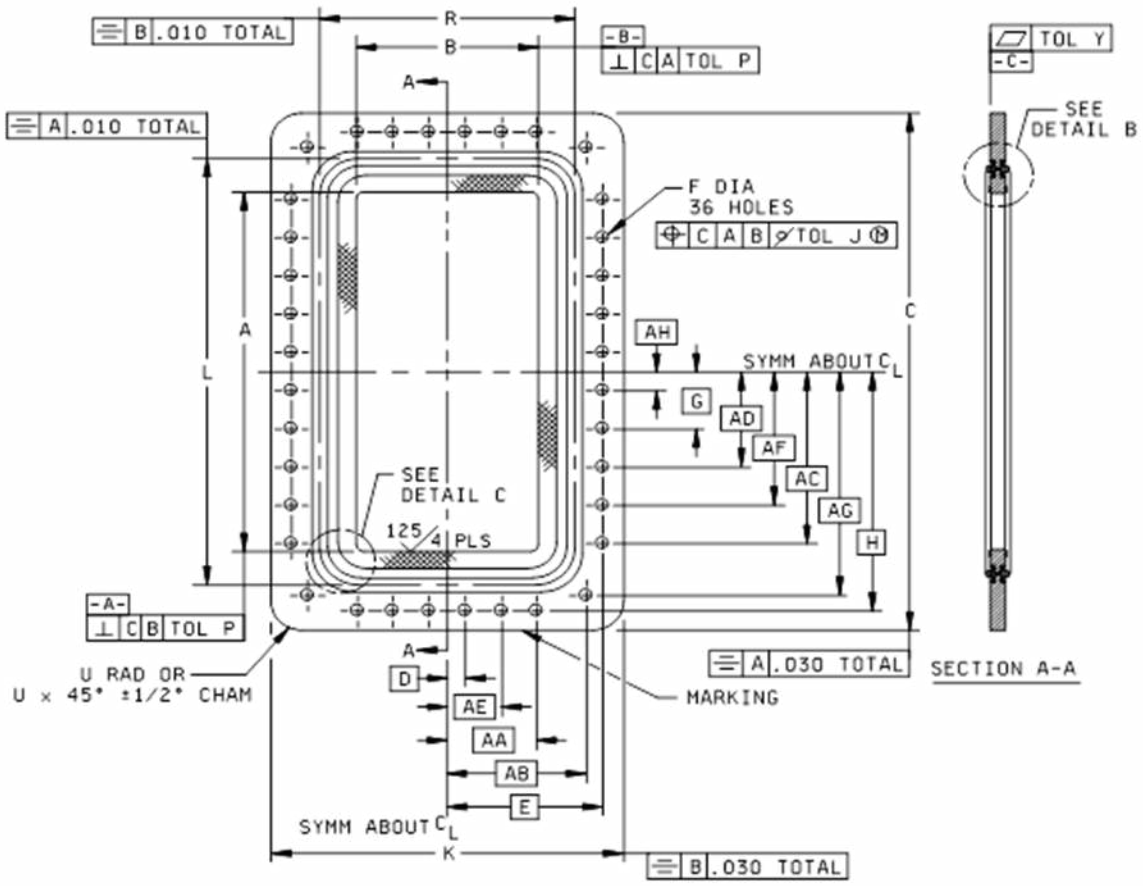

Configuration 8. Gasket configuration for part number 018.

FIGURE 1. Gasket - Continued.


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T19:58Z
Check the source to verify that this is the current version before use.

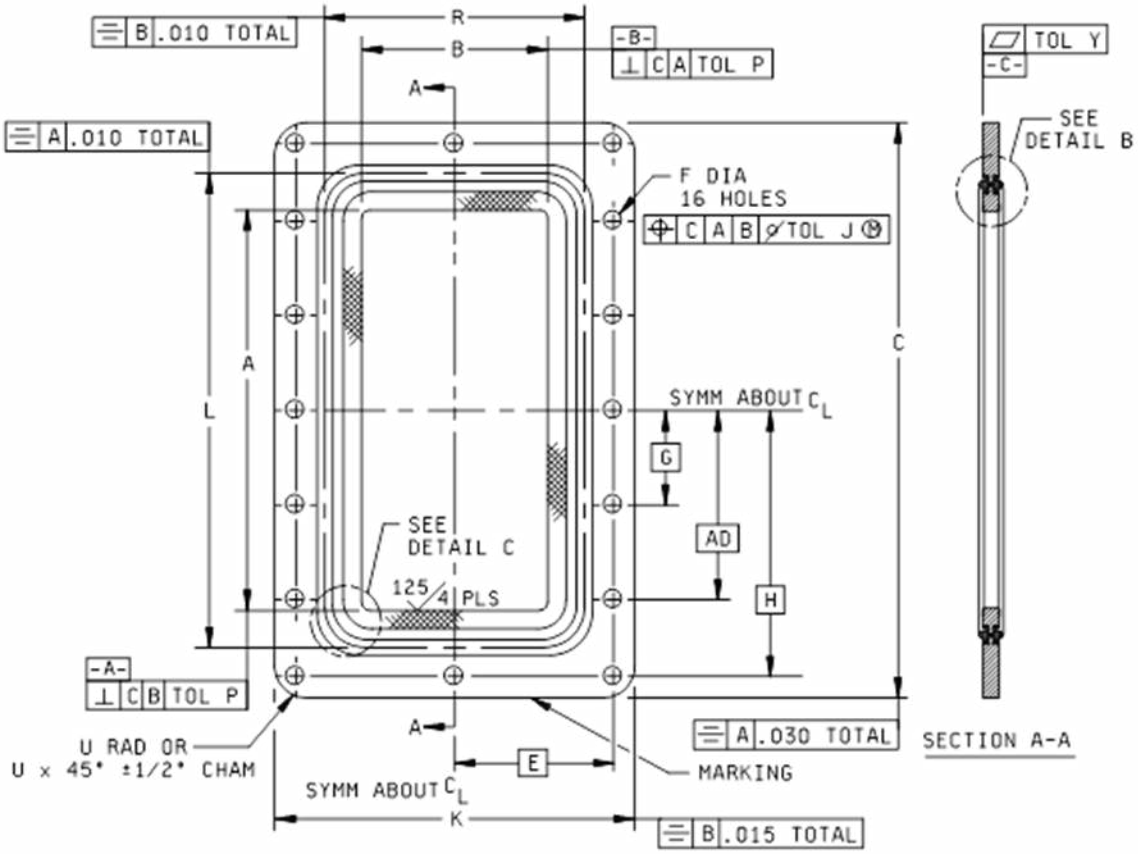

Configuration 9. Gasket configuration for part number 019.

FIGURE 1. Gasket - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T19:58Z
Check the source to verify that this is the current version before use.

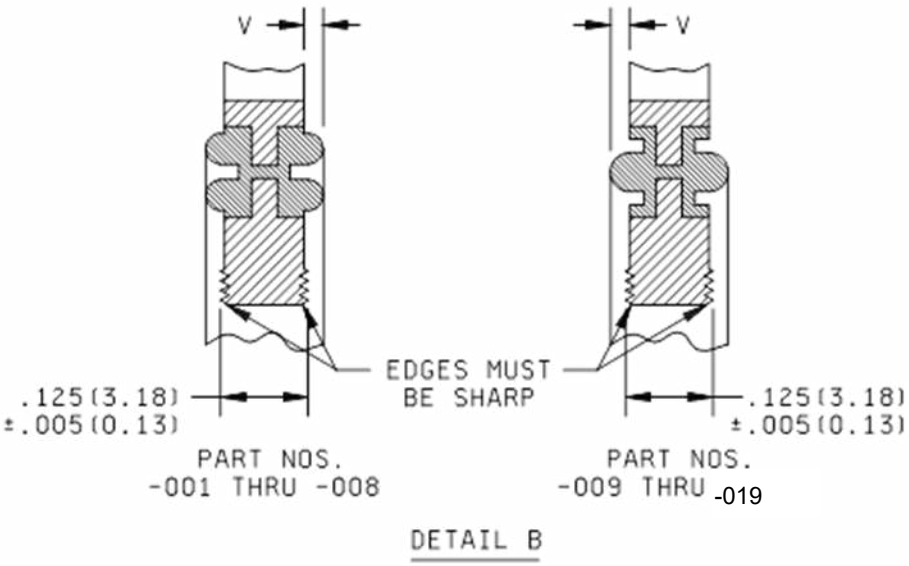

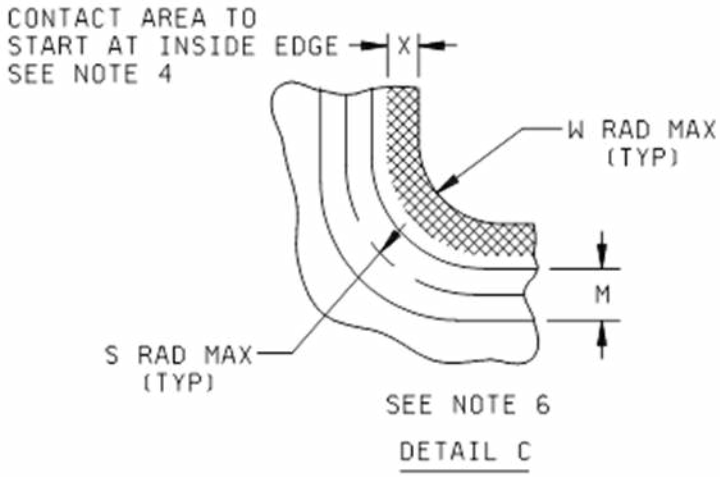


FIGURE 1. Gasket - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T19:58Z
Check the source to verify that this is the current version before use.

Part number M24211/2-	A	B	C	D BSC.	E BSC.	F	G BSC.
001	6.500 ± .005 (165.10 ± .13)	3.250 ± .005 (82.55 ± .13)	8.690 ± .020 (220.73 ± .51)	1.249 (31.72)	2.311 (58.70)	.330 ± .005 (8.38 ± .13)	2.374 (60.30)
002	5.100 ± .005 (129.54 ± .13)	2.550 ± .005 (64.77 ± .13)	7.160 ± .020 (181.86 ± .51)	1.031 (26.19)	1.925 (48.90)	.266 ± .005 (6.76 ± .13)	1.987 (50.47)
003	4.300 ± .005 (109.22 ± .13)	2.150 ± .005 (54.61 ± .13)	6.340 ± .020 (161.04 ± .51)	.938 (23.83)	1.720 (43.69)	.266 ± .005 (6.76 ± .13)	1.787 (45.39)
004	3.400 ± .005 (86.36 ± .13)	1.700 ± .005 (43.18 ± . 13)	5.440 ± .020 (138.18 ± .51)	.671 (17.04)	1.500 (38.10)	.266 ± .005 (6.76 ± .13)	1.344 (34.14)
005	2.840 ± .005 (72.14 ± .13)	1.340 ± .005 (34.04 ± .13)	4.500 ± .020 (114.30 ± .51)	.578 (14.68)	1.164 (29.57)	.257 + .005 (6.53 + .13) - .000	1.281 (32.54)
006	2.290 ± .005 (58.17 ± .13)	1.145 ± .005 (29.08 ± .13)	3.880 ± .020 (98.55 ± .51)	.500 (12.70)	1.050 (26.67)	.257 + .005 (6.53 + .13) - .000	1.070 (27.18)
007	1.872 ± .005 (47.55 ± .13)	.872 ± .005 (22.15 ± .13)	3.500 ± .020 (88.90 ± .51)	.438 (11.13)	.914 (23.22)	.257 + .005 (6.53 + .13) - .000	.562 (14.27)
008	1.590 ± .004 (40.39 ± .10)	.795 ± .004 (20.19 ± .10)	3.190 ± .020 (81.03 ± .51)	.375 (9.53)	.875 (22.23)	.257 + .005 (6.53 + .13) - .000	.500 (12.70)
009	1.372 ± .004 (34.85 ± .10)	.622 ± .004 (15.80 ± .10)	2.690 ± .020 (68.33 ± .51)	.313 (7.95)	.719 (18.26)	.196 + .004 (4.98 + .10) - .000	.438 (11.13)
010	1.122 ± .004 (28.50 ± .10)	.497 ± .004 (12.62 ± .10)	2.500 ± .020 (63.50 ± .51)	.312 (7.92)	.640 (16.26)	.169 + .002 (4.29 + .05) - .000	.375 (9.53)
011	.900 ± .003 (22.86 ± .08)	.400 ± .003 (10.16 ± .08)	2.090 ± .020 (53.09 ± .51)	.312 (7.92)	.578 (14.68)	.169 + .002 (4.29 + .05) - .000	.312 (7.92)
012	7.700 ± .006 (195.58 ± .15)	3.850 ± .006 (97.79 ± .15)	11.219± .015 (284.96 ± .38)	1.000 (25.40)	2.925 (74.30)	.406 + .010 (10.31 + .25) - .000	2.000 (50.80)
013	9.750 ± .006 (247.65 ± .15)	4.875 ± .006 (123.82± .15)	13.250 ± .015 (336.55 ± .38)	1.000 (25.40)	3.437 (87.30)	.406 + .010 (10.31 + .25) - .000	2.000 (50.80)
014	11.500 ± .007 (292.10 ± .18)	5.750 ± .007 (146.05± .18)	15.000 ± .030 (381.00 ± .76)	0.969 (24.6)	3.875 (98.42)	.406 + .010 (10.31 + .25) - .000	3.000 (76.20)
015	15.000 ± .007 (381.00 ± .18)	7.500 ± .007 (190.50± .18)	18.500 ± .030 (469.90 ± .76)	1.000 (25.40)	4.750 (120.6)	.406 + .010 (10.31 + .25) - .000	3.000 (76.20)
016	18.000 ± .008 (457.20 ± .20)	9.000 ± .008 (228.60± .20)	21.500 ± .030 (546.10 ± .76)	0.907 (23.0)	5.500 (139.7)	.406 + .010 (10.31 + .25) - .000	2.000 (50.80)
017	21.000 ± .010 (533.40± .25)	10.500 ± .010 (266.70± .25)	24.625 ± .030 (625.48 ± .76)	1.300 (33.02)	6.500 (165.1)	.531 + .010 (13.49 + .25) - .000	3.917 (99.49)
018	23.000 ± .010 (584.20 ± .25)	11.500 ± .010 (292.10± .25)	26.625 ± .030 (676.28 ± .76)	0.930 (23.6)	7.000 (177.8)	.531 + .010 (13.49 + .25) - .000	3.345 (84.96)
019	9.750 ± .005 (247.65 ± .13)	2.436 ± .005 (61.87 ± .13)	13.250 ± .015 (336.55 ± .38)	---	1.500 (38.10)	.406 + .010 (10.31 + .25) - .000	2.000 (50.80)

FIGURE 1. Gasket - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T19:58Z
Check the source to verify that this is the current version before use.

Part number M24211/2-	H	J	K	L ± .010 (.25)	M ± .010 (.25)	N	P	R ± .010 (.25)
001	3.937 (100.00)	.012 (.30)	5.440 ± .020 (138.18 ± .51)	7.188 (182.58)	.188 (4.78)	.012 (.30)	.005 (.13)	3.938 (100.03)
002	3.200 (81.28)	.011 (.28)	4.620 ± .020 (117.35 ± .51)	5.844 (148.44)	.188 (4.78)	.011 (.28)	.005 (.13)	3.281 (83.34)
003	2.795 (70.99)	.011 (.28)	4.190 ± .020 (106.43 ± .51)	4.884 (124.05)	.172 (4.37)	.011 (.28)	.005 (.13)	2.728 (69.29)
004	2.344 (59.54)	.011 (.28)	3.750 ± .020 (95.25 ± .51)	3.984 (101.19)	.172 (4.37)	.011 (.28)	.005 (.13)	2.284 (58.01)
005	1.914 (48.62)	.007 (.18)	3.000 ± .020 (76.20 ± .51)	3.338 (84.79)	.156 (3.96)	.004 (.10)	.005 (.13)	1.838 (46.69)
006	1.620 (41.15)	.007 (.18)	2.750 ± .020 (69.85 ± .51)	2.750 (69.85)	.156 (3.96)	.005 (.13)	.005 (.13)	1.605 (40.77)
007	1.414 (35.92)	.007 (.18)	2.500 ± .020 (63.50 ± .51)	2.330 (59.18)	.156 (3.96)	---	.005 (.13)	1.330 (33.78)
008	1.273 (32.33)	.007 (.18)	2.440 ± .020 (61.98 ± .51)	2.050 (52.07)	.156 (3.96)	---	.004 (.10)	1.255 (31.88)
009	1.094 (27.79)	.006 (.15)	1.940 ± .020 (49.28 ± .51)	1.782 (45.26)	.110 (2.79)	---	.004 (.10)	1.032 (26.21)
010	.953 (24.21)	.005 (.13)	1.750 ± .020 (44.45 ± .51)	1.532 (38.91)	.110 (2.79)	---	.004 (.10)	.907 (23.04)
011	.828 (21.03)	.005 (.13)	1.590 ± .020 (40.39 ± .51)	1.300 (33.02)	.110 (2.79)	---	.003 (.08)	.800 (20.32)
012	4.850 (123.2)	.030 (.76)	7.375 ± .015 (187.32 ± .38)	8.530 (216.66)	.188 (4.78)	---	.006 (.15)	4.680 (118.87)
013	5.875 (149.2)	.030 (.76)	8.375 ± .015 (212.72 ± .38)	10.532 (267.51)	.203 (5.16)	---	.006 (.15)	5.657 (143.69)
014	6.750 (171.4)	.030 (.76)	9.250 ± .015 (234.95 ± .38)	12.600 (320.04)	.234 (5.94)	---	.007 (.18)	6.850 (173.99)
015	8.500 (215.9)	.030 (.76)	11.000 ± .015 (279.40 ± .38)	16.064 (408.03)	.234 (5.94)	---	.007 (.18)	8.564 (217.53)
016	10.000 (250.0)	.030 (.76)	12.500 ± .030 (317.50 ± .76)	19.064 (484.23)	.234 (5.94)	---	.008 (.20)	10.064 (255.63)
017	11.750 (298.45)	.030 (.76)	14.125 ± .030 (358.78 ± .76)	21.970 (558.04)	.212 (5.38)	---	.010 (.25)	11.470 (291.34)
018	12.750 (323.85)	.030 (.76)	15.125 ± .030 (384.18 ± .76)	23.850 (605.79)	.234 (5.94)	---	.010 (.25)	12.350 (313.69)
019	5.875 (149.2)	.030 (.76)	4.500 ± .015 (114.30 ± .38)	10.450 (265.43)	.140 (3.56)	---	.005 (.13)	3.237 ± .005 (82.22 ± 0.13)

FIGURE 1. Gasket - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T19:58Z
Check the source to verify that this is the current version before use.

Part number M24211/2-	S ± .010 (.25)	T	U	V ± .005 (.13)	W	X ± .02 (.51)	Y
001	.375 (9.52)	.330 ± .005 (8.38 ± .13)	.25 (6.35)	.020 (.51)	.050 (1.27)	.19 (4.83)	.005 (.13)
002	.250 (6.35)	.266 ± .005 (6.76 ± .13)	.25 (6.35)	.020 (.51)	.050 (1.27)	.16 (4.06)	.005 (.13)
003	.250 (6.35)	.266 ± .005 (6.76 ± .13)	.25 (6.35)	.020 (.51)	.050 (1.27)	.16 (4.06)	.005 (.13)
004	.367 (9.32)	.266 ± .005 (6.76 ± .13)	.25 (6.35)	.020 (.51)	.050 (1.27)	.16 (4.06)	.005 (.13)
005	.280 (7.11)	.257 ± .003 (6.53 ± .08)	.31 (7.87)	.020 (.51)	.050 (1.27)	.09 (4.83)	.005 (.13)
006	.140 (3.56)	.257 ± .002 (6.53 ± .05)	.31 (7.87)	.020 (.51)	.050 (1.27)	.09 (4.83)	.005 (.13)
007	.260 (6.60)	---	.31 (7.87)	.020 (.51)	.030 (.76)	.09 (4.83)	.005 (.13)
008	.140 (3.56)	---	.31 (7.87)	.020 (.51)	.030 (.76)	.09 (4.83)	.004 (.10)
009	.236 (5.99)	---	.25 (6.35)	.026 (.66)	.030 (.76)	.09 (4.83)	.004 (.10)
010	.236 (5.99)	---	.25 (6.35)	.026 (.66)	.030 (.76)	.09 (4.83)	.004 (.10)
011	.231 (5.87)	---	.25 (6.35)	.026 (.66)	.030 (.76)	.09 (4.83)	.003 (.08)
012	.540 (13.72)	---	.25 (6.35)	.020 (.51)	.050 (1.27)	.22 (5.59)	.005 (.13)
013	.516 (13.11)	---	.25 (6.35)	.020 (.51)	.050 (1.27)	.22 (5.59)	.005 (.13)
014	.500 (12.70)	---	.25 (6.35)	.020 (.51)	.050 (1.27)	.22 (5.59)	.005 (.13)
015	.657 (16.69)	---	.25 (6.35)	.020 (.51)	.050 (1.27)	.22 (5.59)	.005 (.13)
016	.657 (16.69)	---	.25 (6.35)	.020 (.51)	.050 (1.27)	.22 (5.59)	.005 (.13)
017	.563 (14.30)	---	.25 (6.35)	.020 (.51)	.050 (1.27)	.22 (5.59)	.005 (.13)
018	.551 (14.00)	---	.25 (6.35)	.020 (.51)	.050 (1.27)	.22 (5.59)	.005 (.13)
019	.200 (5.08)	---	.25 (6.35)	.026 (.66)	.031 (.79)	.16 (4.06)	.005 (.13)

FIGURE 1. Gasket - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T19:58Z
Check the source to verify that this is the current version before use.

Part number M24211/2-	AA	AB	AC	AD	AE	AF	AG	AH
012	---	---	---	4.000 (101.6)	---	---	---	---
013	---	---	---	4.000 (101.6)	3.000 (76.20)	---	---	---
014	---	---	---	5.000 (127.0)	2.907 (73.84)	---	---	1.000 (25.40)
015	---	---	---	5.000 (127.0)	3.000 (76.20)	7.000 (177.8)	---	1.000 (25.40)
016	4.532 (115.1)	---	8.000 (203.2)	4.000 (101.6)	2.719 (69.06)	6.000 (152.4)	---	---
017	6.061 (153.9)	---	11.311 (287.30)	6.528 (165.8)	3.900 (99.06)	9.139 (232.1)	---	1.306 (33.17)
018	4.651 (118.1)	6.511 (165.4)	10.032 (254.8)	5.574 (141.6)	2.790 (70.87)	7.803 (198.2)	12.261 (311.4)	1.116 (28.35)
019	---	---	---	4.000 (101.6)	---	---	---	---

INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
0.010	.25	1.306	33.17	3.900	99.06	5.875	149.22	8.000	203.20
0.015	.38	2.000	50.80	3.917	99.49	6.000	152.40	8.500	215.90
0.020	.51	2.719	69.06	4.000	101.60	6.061	153.95	9.139	232.13
0.030	.76	2.790	70.87	4.532	115.11	6.500	165.10	10.000	254.00
0.907	23.04	2.907	73.84	4.651	118.14	6.511	165.38	10.032	254.81
0.930	23.62	2.925	74.30	4.750	120.65	6.528	165.81	11.311	287.30
0.969	24.61	3.000	76.20	4.850	123.19	6.750	171.45	11.750	298.45
1.000	25.40	3.345	84.96	5.000	127.00	7.000	177.80	12.261	311.43
1.116	28.35	3.437	87.30	5.500	139.70	7.803	198.20	12.750	323.85
1.300	33.02	3.875	98.43	5.574	141.58				

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are in parentheses.
3. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
4. Electrical contact area to be .004 (.10 mm) ± .001 (.03 mm) higher than adjacent metal surface.
5. Roughness of mating surfaces other than the raised electrical contact area shall not exceed 63 microinches in accordance with ASME-B46.1 except that flaws shall be included in the roughness height measurement.
6. Any raised embossed pattern for electrical contact is acceptable provided R.F. leakage requirement is met.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T19:58Z
Check the source to verify that this is the current version before use.

Referenced documents. In addition to MIL-DTL-24211, this document references the following: ASME-B46.1

Amendment notations. The margins of this specification sheet are marked with vertical line to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Custodians:
Army - CR
Navy - EC
Air Force - 85

Preparing activity:
DLA - CC

(Project 5985-2023-007)

Review activities:
Army - AR
Navy - AS, CG, MC, OS, SH
Air Force - 19

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T19:58Z
Check the source to verify that this is the current version before use.