INCH-POUND
MIL-DTL-24215/9D
w/AMENDMENT 1
24 May 2022
SUPERSEDING
MIL-DTL-24215/9D
24 July 2017

DETAIL SPECIFICATION SHEET

ATTENUATORS, VARIABLE (COAXIAL),

CLASS 5 (SMA)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the attenuators described herein shall consist of this specification and MIL-DTL-24215.

REQUIREMENTS

Dimensions and configuration: See figures 1, 2, 3, 4, 5, and 6.

Nominal impedance: 50 ohms.

Final finish: Flat black, in accordance with SAE-AMS-STD-595/37038.

Electrical requirements: See table I.

Part or identifying number (PIN): See table I.

AMSC N/A
FSC 5985

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:00Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical requirements.

PIN M24215/9-	Fig.	Freq. range (GHz)	Atten. range (dB) 3/	VSWR (max)	Insertion loss (max. at min. atten. setting) (dB)	Calibration accuracy (dB)	Frequency sensitivity (dB)	Min. input (watts)		Nominal operating temp. range (°C)	Weight (max)		
								av.	pk.		lbs	(g)	oz
001	1	2 - 8	0-15 at 2 GHz 0 -20 at 4-8 GHz	1.50:1	0.5	N/A	---	2	---	-45 - +100 (See notes 1 and 2)	.18	(82)	(2.9)
02	2	2 - 8	0-15 at 2 GHz 0-20 at 4-8 GHz	1.50:1	0.5	N/A	---	2	---	-45 - +100 (See notes 1 and 2)	.16	(73)	(2.5)
003	3	7 - 11	0 - 20	1.50:1	0.5	N/A	± 1.5	2	---	-45 - +100 (See notes 1 and 2)	.16	(73)	(2.5)
004	4	9.0 - 9.2	0 - 30	1.50:1	0.7	± 0.5	± 0.3	2	200	-18 - +70	1	(454)	(16)
005	5	4.0 - 18	0 - 15	1.50:1	1.0	N/A	± 2	5	3000	-30 - +105	.5	(227)	(8)
006	6	11 - 17	0 - 20	1.50:1	0.5	N/A	± 2	5	3000	-30 - +105	.16	(73)	(2.5)

NOTES:

1. Non-operating ambient temperature range: -60°C to +110°C.
2. Temperature coefficient: 1.0 dB maximum change over the temperature range -45°C to +55 °C at any attenuation setting.
3. Continuously variable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:00Z
Check the source to verify that this is the current version before use.

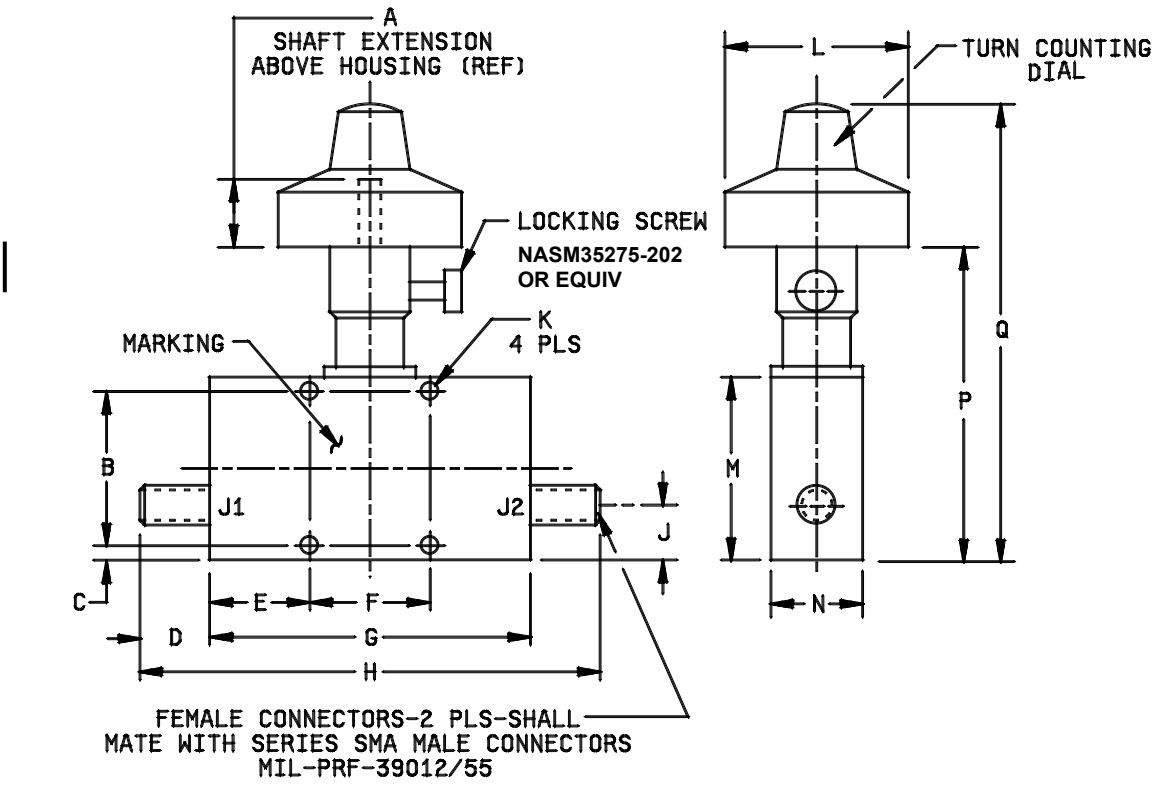


FIGURE 1. Dimensions and configuration for PIN M24215/9-001.


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:00Z
Check the source to verify that this is the current version before use.

Ltr	Inches	Inches	Millimeters	Millimeters
	Max	Min	Max	Min
A	.58	.54	14.7	13.7
B	.849	.839	21.56	21.31
C	.11	.06	2.8	1.5
D	.40	.36	10.2	9.1
E	.58	.52	14.7	13.2
F	.661	.651	16.79	16.54
G	1.78	1.72	45.2	43.7
H	2.54	2.48	64.5	63.0
J	.33	.27	8.4	6.9
K	.107 dia	.101 dia	2.72 dia	2.57 dia
L	1.03 dia	.97 dia	26.2 dia	24.6 dia
M	1.03	.97	26.2	24.6
N	.53	.47	13.5	11.9
P	1.75	1.69	44.4	42.9
Q	2.53	2.47	64.3	62.7

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.

FIGURE 1. Dimensions and configuration for PIN M24215/9-001 - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:00Z
Check the source to verify that this is the current version before use.

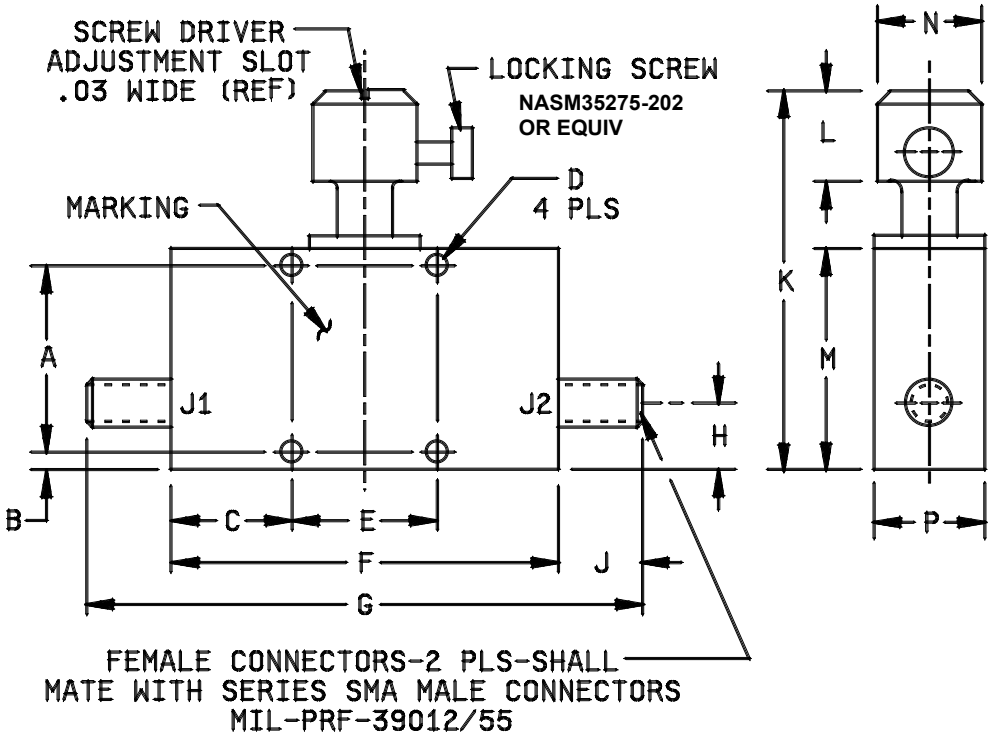


Ltr	Inches	Inches	Millimeters	Millimeters
	Max	Min	Max	Min
A	.849	.839	21.56	21.31
B	.11	.06	2.8	1.5
C	.58	.52	14.7	13.2
D	.107 dia	.101 dia	2.72 dia	2.57 dia
E	.661	.651	16.79	16.54
F	1.78	1.72	45.2	43.7
G	2.54	2.48	64.5	63.0
H	.303	.297	7.70	7.54
J	.41	.35	10.4	8.9
K	1.75	1.69	44.4	42.9
L	.46	.36	11.7	9.1
M	1.03	.97	26.2	24.6
N	.52	.42	13.2	10.7
P	.53	.47	13.5	11.9

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.

FIGURE 2. Dimensions and configuration for PIN M24215/9-002.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:00Z
Check the source to verify that this is the current version before use.

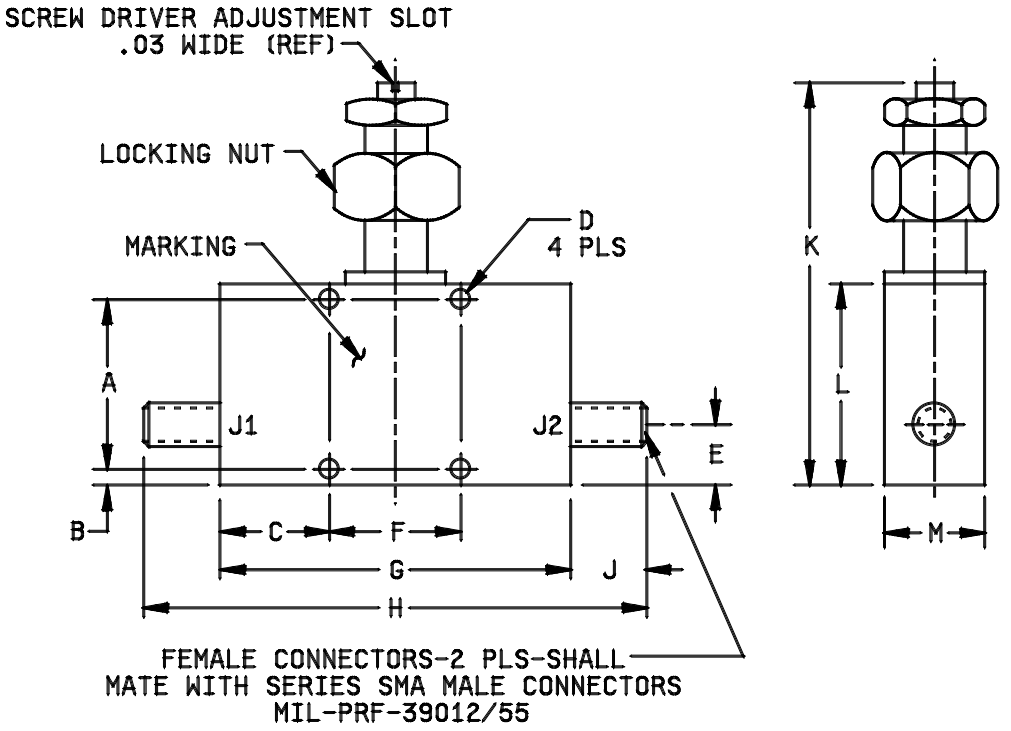

Ltr	Inches	Inches	Millimeters	Millimeters
	Max	Min	Max	Min
A	.849	.839	21.56	21.31
B	.11	.06	2.8	1.5
C	.58	.52	14.7	13.2
D	.107 dia	.101 dia	2.72 dia	2.57 dia
E	.303	.297	7.70	7.54
F	.661	.651	16.79	16.54
G	1.78	1.72	45.2	43.7
H	2.54	2.48	64.5	63.0
J	.40	.36	10.2	9.1
K	2.03	1.97	51.6	50.0
L	1.03	.97	26.2	24.6
M	.53	.47	13.5	11.9

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.

FIGURE 3. Dimensions and configuration for PIN M24215/9-003.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:00Z
Check the source to verify that this is the current version before use.

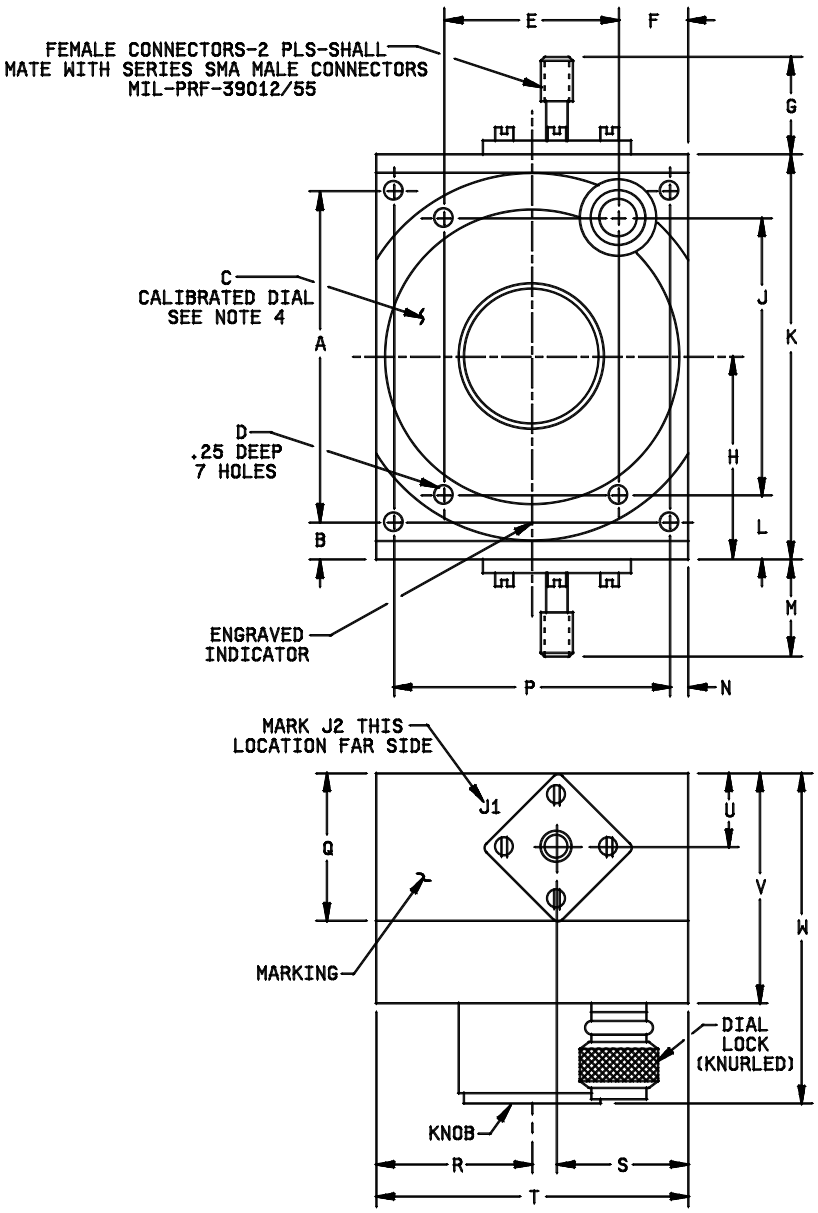


FIGURE 4. Dimensions and configuration for PIN M24215/9-004.


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:00Z
Check the source to verify that this is the current version before use.

Ltr	Inches	Inches	Millimeters	Millimeters
	Max	Min	Max	Min
A	2.260	2.240	57.4	56.9
B	.27	.23	6.9	5.8
C	2.02 dia	1.98 dia	51.3 dia	50.3 dia
D	.27	.23	6.9	5.8
E	1.197	1.177	30.40	29.90
F	.49	.45	12.4	11.4
G	.68	.64	17.3	16.3
H	1.40	1.36	35.6	34.5
J	1.885	1.865	47.88	47.37
K	2.77	2.73	70.4	69.34
L	.46	.42	11.7	10.7
M	.68	.64	17.3	16.3
N	.14	.10	3.6	2.5
P	1.885	1.865	47.9	47.4
Q	1.03	.97	26.2	24.6
R	1.08	1.04	27.4	26.4
S	.90	.86	22.9	21.8
T	2.14	2.10	54.4	53.3
U	.48	.52	12.2	13.2
V	1.53	1.59	38.9	40.4
W	2.21	2.27	56.1	57.6

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.02 (.5 mm).
4. Dial shall be marked in one dB steps to the 10 dB level, and in two dB steps through the 30 dB level.

FIGURE 4. Dimensions and configuration for PIN M24215/9-004 - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:00Z
Check the source to verify that this is the current version before use.

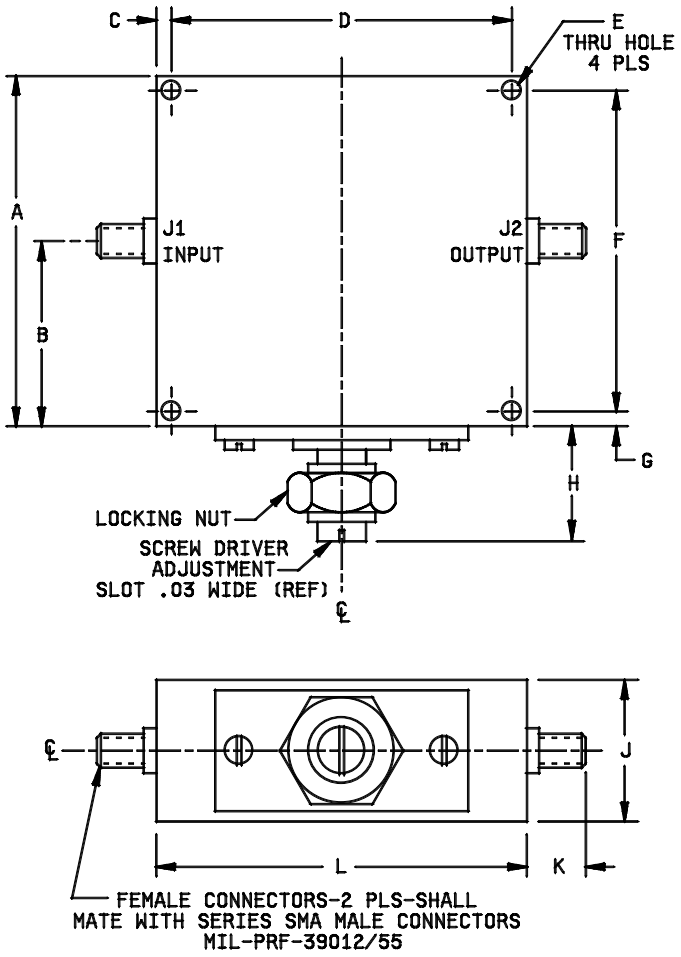


NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.03 (.8 mm).

Ltr	Inches	Inches	Millimeters	Millimeters
	Max	Min	Max	Min
A	2.28	2.22	57.9	56.4
B	1.22	1.16	31.0	29.5
C	.12	.06	3.0	1.5
D	2.192	2.182	55.7	55.4
E	.133 dia	.127 dia	3.38 dia	3.23 dia
F	2.067	2.057	52.5	52.2
G	.12	.07	3.0	1.8
H	.65	.59	16.5	15.0
J	.94	.88	23.9	22.4
K	.41	.35	10.4	8.9
L	2.41	2.35	61.2	59.7

FIGURE 5. Dimensions and configuration for PIN M24215/9-005

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:00Z
Check the source to verify that this is the current version before use.

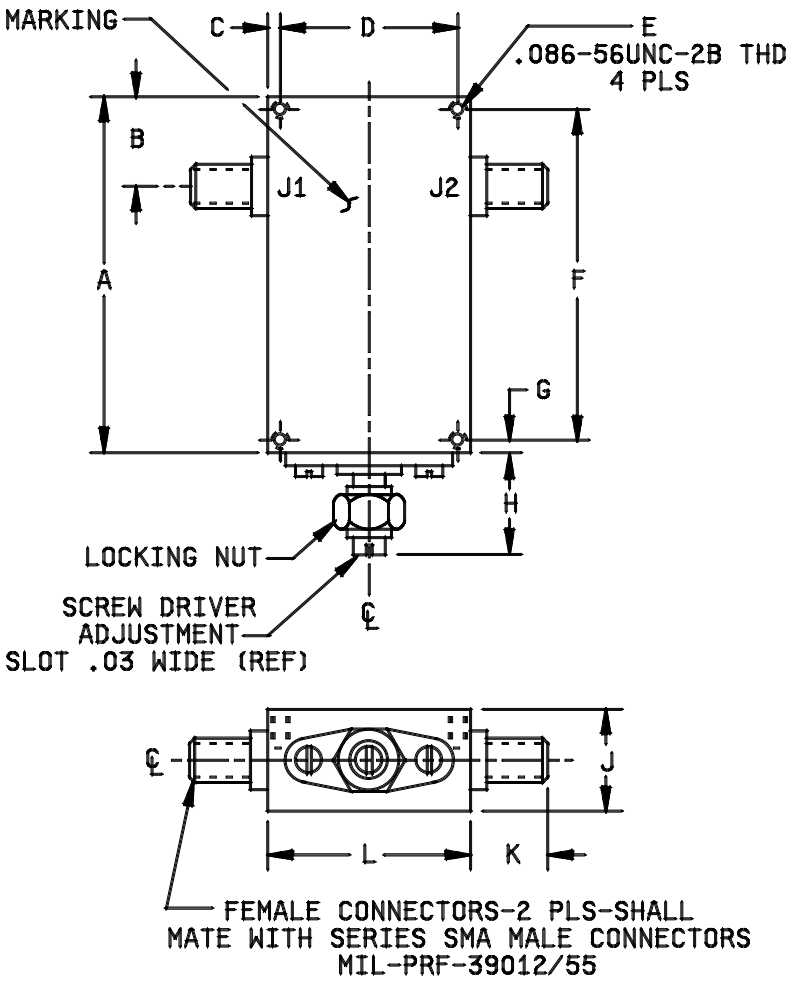

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.03 (.8 mm).

Ltr	Inches	Inches	Millimeters	Millimeters
	Max	Min	Max	Min
A	1.78	1.72	45.2	43.7
B	.47	.41	11.9	10.4
C	.09	.03	2.3	.8
D	.905	.845	22.99	21.46
E	---	.190 deep	---	4.83 deep
F	1.655	1.595	42.04	40.51
G	.09	.03	2.3	.8
H	.53	.47	13.5	11.9
J	.53	.47	13.5	11.9
K	.41	.35	10.4	8.9
L	1.03	.97	26.2	24.6

FIGURE 6. Dimensions and configuration for PIN M24215/9-006.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:00Z
Check the source to verify that this is the current version before use.

Referenced documents: In addition to MIL-DTL-24215, this document references the following
MIL-PRF-39012/55
SAE-AMS-STD-595
AIA/NAS NASM35275

Amendment notations. The margins of this specification sheet are marked with vertical line to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Custodians:
Army - CR
Navy - EC
Air Force - 85
DLA - CC

Preparing activity:
DLA - CC

(Project 5985-2022-015)

Review activities:
Army - AR, MI, SM
Navy - AS, MC, OS

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:00Z
Check the source to verify that this is the current version before use.