MILITARY SPECIFICATION SHEET

PLUG ASSEMBLIES, STRAIGHT

This specification sheet is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the plug assemblies described herein shall consist of this document and the latest issue of MIL-C-24217.

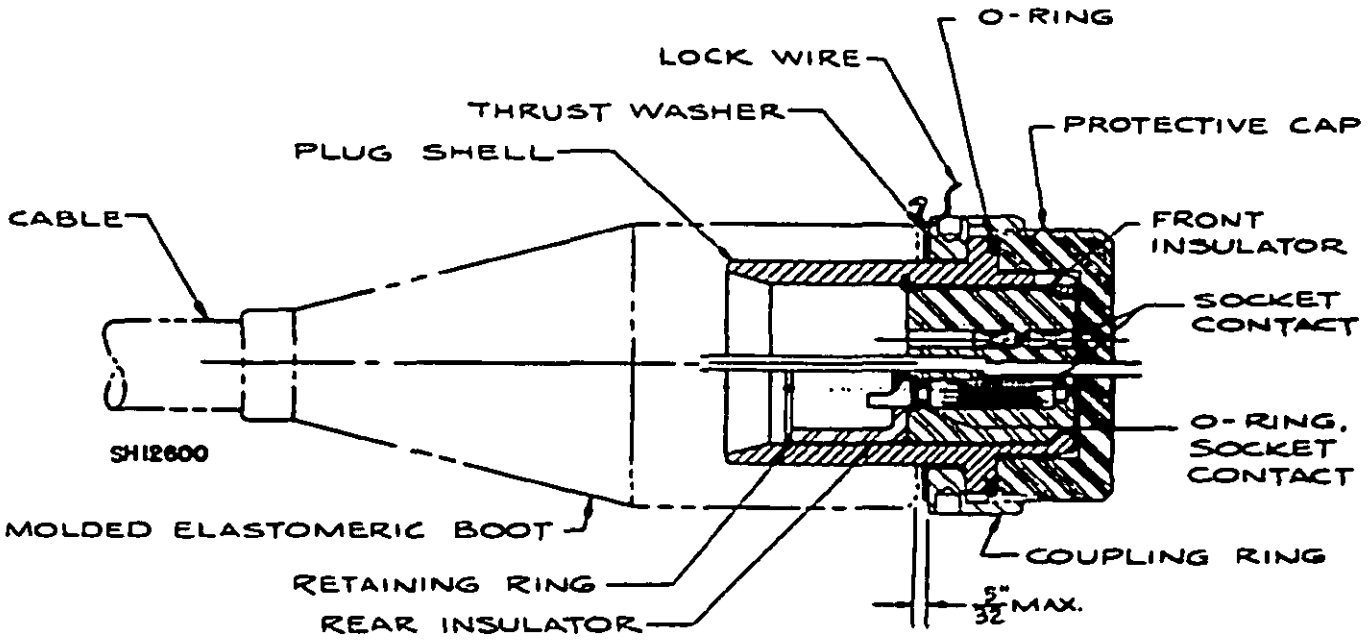


FIGURE 1. Configuration of plug assembly.

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 202610-19T20:03Z
Check the source to verify that this is the current version before use.

TABLE I. Part numbers for straight plug assemblies.

PLUG ASSY. NUMBER M24217/	SOCKET CONTACT NUMBER	O-RING SOCKET CONTACT AS-568A	NUMBER AND SIZE OF CONTACTS	PLUG SHELL NUMBER M24217/	COUPLING RING NUMBER M24217/	FRONT INSULATOR NUMBER M24217/	REAR INSULATOR NUMBER M24217/	SHELL O-RING NUMBER AS-568A	THRUST WASHER NUMBER M24217/	RETAINING RING SPIROLOX NUMBER	PROTECT. CAP NUMBER M24217/
7-001	MS17804-16-16	———	3 NO.16	7-024	7-039	7-050	———	-117	7-093	UR-625	7-078
7-002	MS17804-16-20										
7-003	MS17804-16-16	———	5 NO.16	7-025	7-040	7-051	———	-122	7-094	UR-755	7-079
7-004	MS17804-16-20										
7-022	MS17804-16-16	———	5 NO 16 (SPECIAL)	7-026	7-039	7-064	———	-117	7-093	UR-625	7-078
7-023	MS17804-16-20										
7-005	MS17804-16-16	———	9 NO.16	7-027	7-041	7-052	———	-126	7-095	UR-875	7-080
7-006	MS17804-16-20										
7-007	MS17804-16-16	———	14 NO.16	7-028	7-042	7-053	———	-132	7-096	UR-1125	7-081
7-008	MS17804-16-20										
7-009	MS17804-16-16	———	24 NO.16	7-029	7-043	7-054	———	-138	7-097	UR-1505	7-082
7-010	MS17804-16-20										
7-011	MS17804-16-16	———	37 NO.16	7-030	7-044	7-055	———	-145	7-098	UR-1815	7-083
7-012	MS17804-16-20										
7-013	MS17804-16-16	———	48 NO 16	7-031	7-045	7-056	———	-151	7-099	UR-2255	7-084
7-014	MS17804-16-20										
7-015	M24217/7-089	-004	3 NO.12	7-032	7-046	7-057	7-071	-126	7-095	UR-875	7-085
7-016	M24217/7-089	-004	5 NO.12	7-033	7-047	7-058	7-072	-132	7-096	UR-1125	7-086
7-017	M24217/7-089	-004	9 NO.12	7-034	7-048	7-059	7-073	-138	7-097	UR-1505	7-087
7-018	M24217/7-090	-007	3 NO.8	7-035	7-047	7-060	7-074	-132	7-096	UR-1125	7-086
7-019	M24217/7-091	-010	3 NO.4	7-036	7-048	7-061	7-075	-138	7-097	UR-1505	7-087
7-020	M24217/7-089	-004	3 NO.12 WITH 3 NO.8	7-037	7-048	7-062	7-076	-138	7-097	UR-1505	7-087
	M24217/7-090	-007									
7-021	M24217/7-092	-013	2 NO.0 WITH 4 NO.12	7-038	7-049	7-063	7-077	-145	7-098	UR-1815	7-088
	M24217/7-089	-004									

Source: https://assist.dla.mil -- Downloaded: 20260-19T20:03Z
Check the source to verify that this is the current version before use.

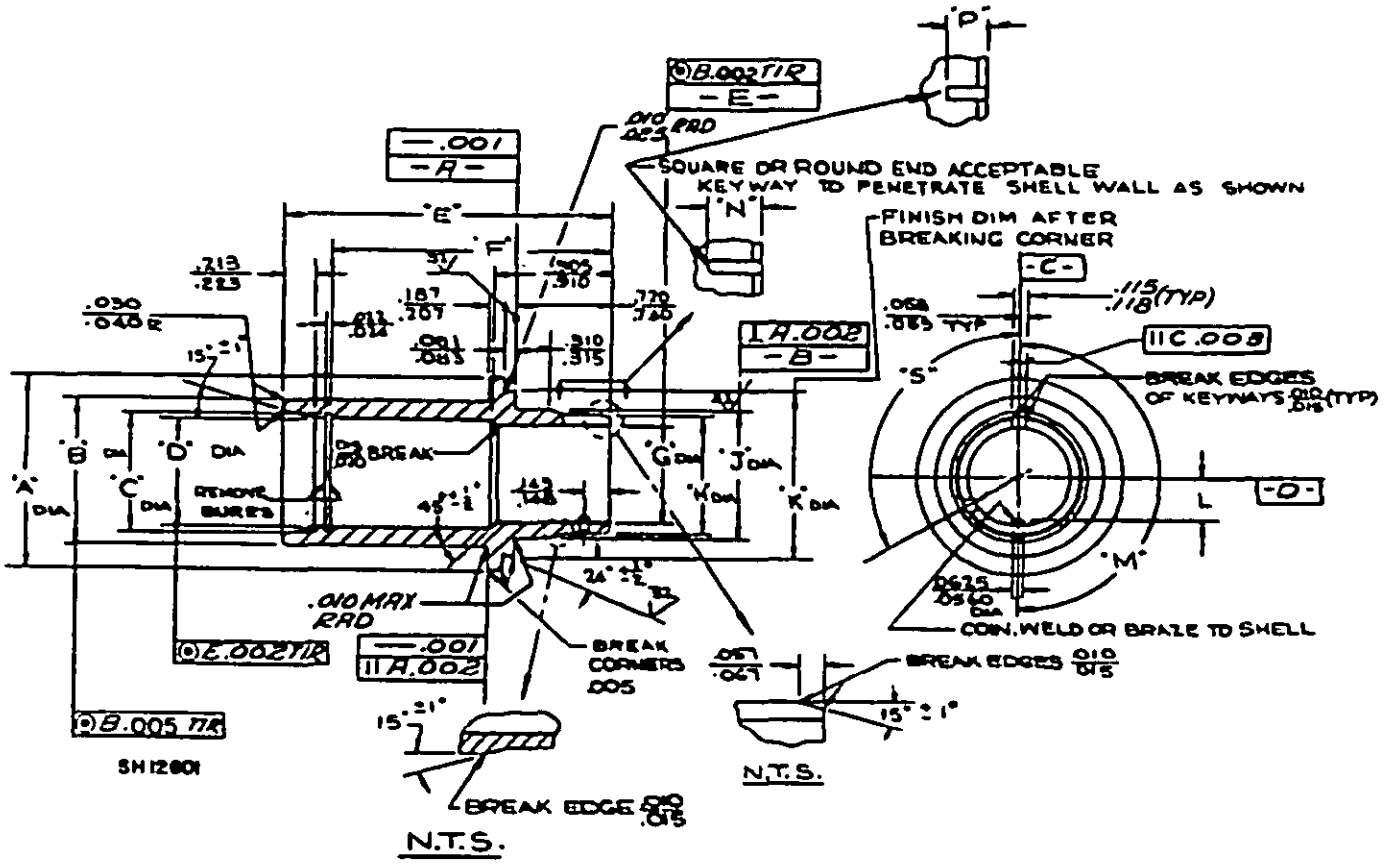


FIGURE 2. Plug shell.

Source: https://assist.dla.mil -- Downloaded: 202610-19T20:03Z
Check the source to verify that this is the current version before use.

TABLE II. Dimensions for plug shell.

PLUG SHELL PART NUMBER	NO. & SIZE OF CONTACTS	A	B*	C	D	E	F	G	H	J	K	L	M	N	P	S
M24217/7-024	3 NO. 16	1.130 1.120	.875 .873	.651 .655	.602 .606	2.320 2.300	1.179 1.184	.484 .486	.592 .588	.623 .621	.850 .840	.217 .212	120°	.423 .433	.365 .375	120°
M24217/7-025	5 NO. 16	1.380 1.370	1.062 1.060	.777 .781	.732 .736	2.520 2.500	1.284 1.279	.608 .610	.752 .748	.812 .810	1.163 1.159	.278 .273	180°	.423 .433	.365 .375	120°
M24217/7-026	5 NO. 16 (SPECIAL)	1.130 1.120	.875 .873	.691 .695	.626 .630	2.320 2.300	1.107 1.112	.933 .931	.609 .605	.623 .621	.890 .840	.240 .235	180°	.423 .433	.365 .375	0°

* SEE REQUIREMENT 2.

Source: https://assist.dla.mil -- Downloaded: 202610-19T20:03Z
Check the source to verify that this is the current version before use.

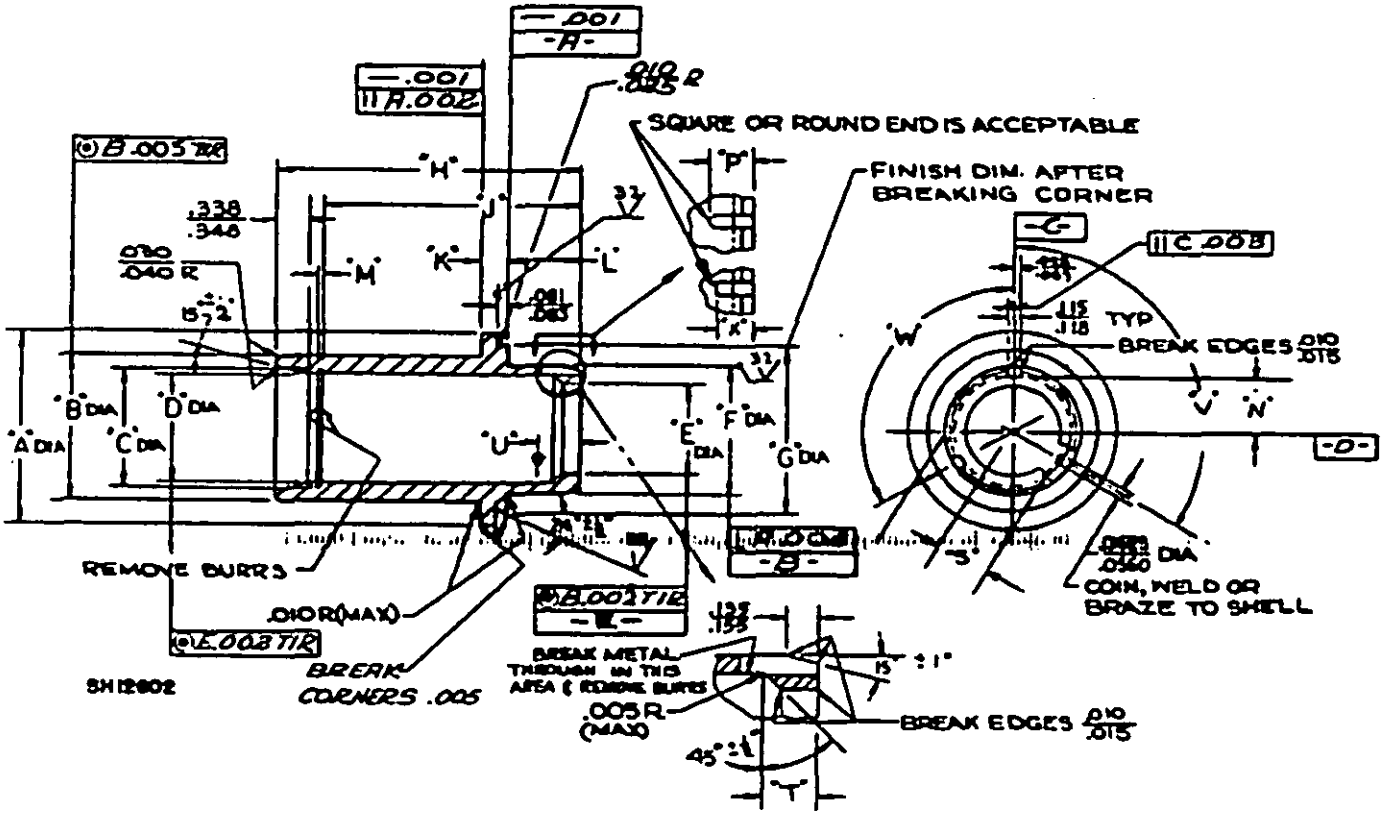


FIGURE 3. Plug shell.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:03Z
Check the source to verify that this is the current version before use.

TABLE III. Dimensions for plug shell.

PLUG SHELL PART NO.	NO. & SIZE OF CONTACTS	A	B*	C	D	E	F	G	H	J	K	L	M	N	P	S	T	U	V	W	X
M24217/ 7-027	9 NO. 16	1.630 1.620	1.187 1.185	.914 .920	.874 .878	.750 .752	1.050 1.056	1.413 1.403	2.648 2.625	1.526 1.551	.269 .249	.720 .730	.026 .028	.435 .430	.423 .433	.405 .410	.255 .250	.300 .305	120°	120°	.375 .365
M24217/ 7-028	14 NO. 16	2.005 1.995	1.502 1.500	1.168 1.173	1.136 1.140	.954 .956	1.308 1.306	1.792 1.782	3.020 3.000	1.526 1.531	.269 .249	.720 .730	.031 .033	.566 .561	.423 .433	.536 .541	.255 .250	.300 .305	120°	120°	.375 .365
M24217/ 7-029	24 NO. 16	2.380 2.370	1.875 1.873	1.540 1.548	1.493 1.497	1.209 1.210	1.680 1.688	2.167 2.157	3.145 3.125	1.526 1.531	.269 .249	.720 .730	.031 .033	.744 .739	.407 .417	.716 .721	.255 .250	.300 .305	120°	120°	.358 .348
M24217/ 7-030	37 NO. 16	2.880 2.870	2.315 2.313	1.864 1.874	1.813 1.817	1.462 1.454	2.063 2.063	2.667 2.995	3.928 3.975	2.026 2.031	.331 .311	.720 .730	.030 .042	.204 .899	.407 .417	.876 .881	.317 .312	.375 .370	120°	120°	.358 .348
M24217/ 7-031	48 NO. 16	3.380 3.376	2.750 2.748	2.320 2.332	2.268 2.252	2.009 2.002	2.427 2.438	3.047 3.057	3.648 3.625	2.280 2.285	.340 .320	.295 1.005	.029 .042	1.122 1.117	.681 .691	1.054 1.095	.255 .250	.300 .305	120°	120°	.632 .622
M24217/ 7-032	3 NO. 12	1.630 1.620	1.187 1.185	.914 .920	.874 .878	.750 .752	1.050 1.056	1.413 1.403	2.025 2.078	2.625 2.630	.269 .249	1.183 1.188	.026 .028	.435 .430	.865 .875	.405 .410	.255 .250	.300 .305	120°	120°	.816 .806
M24217/ 7-033	5 NO. 12	2.005 1.995	1.502 1.500	1.168 1.173	1.136 1.140	.954 .956	1.308 1.306	1.792 1.782	3.020 3.000	2.727 3.007	.269 .249	1.183 1.188	.031 .033	.566 .561	.865 .875	.536 .541	.255 .250	.300 .305	120°	120°	.816 .806
M24217/ 7-034	9 NO. 12	2.380 2.370	1.875 1.873	1.540 1.548	1.493 1.497	1.209 1.210	1.680 1.688	2.167 2.157	3.145 3.125	2.727 3.007	.269 .249	1.183 1.188	.031 .033	.744 .739	.865 .875	.717 .722	.255 .250	.300 .305	120°	120°	.816 .806
M24217/ 7-035	3 NO. 8	2.005 1.995	1.502 1.500	1.165 1.173	1.111 1.115	.828 .830	1.308 1.306	1.792 1.782	3.420 3.470	2.727 3.007	.269 .249	1.183 1.188	.031 .033	.553 .548	.865 .875	.526 .531	.255 .250	.300 .305	120°	120°	.816 .806
M24217/ 7-036	3 NO. 4	2.380 2.370	1.875 1.873	1.540 1.548	1.493 1.497	1.209 1.210	1.680 1.688	2.167 2.157	3.145 3.125	2.727 3.007	.269 .249	1.183 1.188	.031 .033	.744 .739	.865 .875	.717 .722	.255 .250	.300 .305	120°	120°	.816 .806
M24217/ 7-037	3 NO. 8 WITH 3 NO. 12	2.380 2.370	1.875 1.873	1.540 1.548	1.493 1.497	1.209 1.210	1.680 1.688	2.167 2.157	3.145 3.125	2.727 3.007	.269 .249	1.183 1.188	.031 .033	.744 .739	.865 .875	.717 .722	.255 .250	.300 .305	120°	120°	.816 .806
M24217/ 7-038	2 NO. 0 WITH 4 NO. 12	2.880 2.870	2.315 2.313	1.864 1.874	1.813 1.817	1.462 1.454	2.063 2.063	2.667 2.995	3.928 3.975	3.245 3.255	.331 .311	1.183 1.188	.039 .042	.904 .899	.865 .875	.876 .881	.317 .312	.375 .370	120°	120°	.816 .806

* SEE REQUIREMENT 2.

MIL-C-24217/7(SH)

Source: https://assist.dla.mil -- Downloaded: 20260-19T20:03Z
Check the source to verify that this is the current version before use.

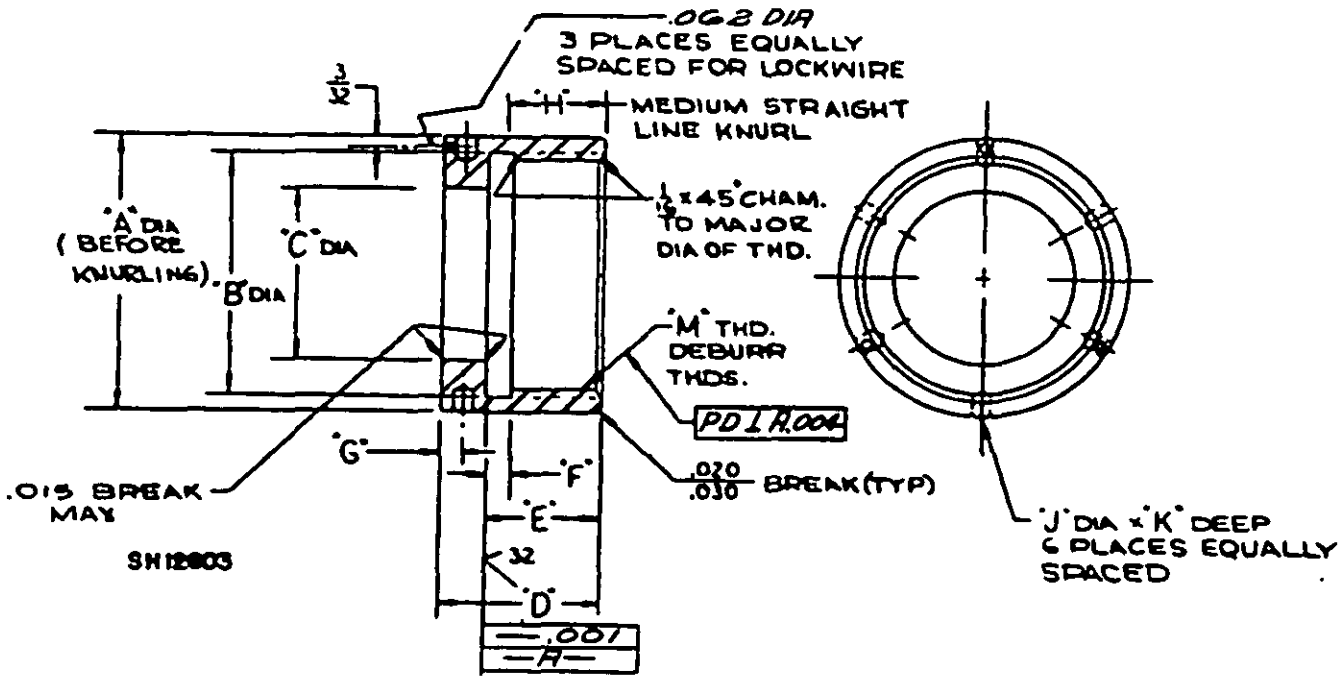



FIGURE 4. Coupling ring.

Source: https://assist.dla.mil -- Downloaded: 202610-19T20:03Z
Check the source to verify that this is the current version before use.

TABLE IV. Dimensions for coupling ring.

COUPLING RING PART NUMBER	NO.& SIZE OF CONTACTS	A	B	C	D	E	F	G	H	J	K	M
M24217/ 7-039	3 NO. 16 3 NO. 16 (SPECIAL)	1.385 1.365	1.260 1.280	.885 .895	.760 .740	.430 .440	.120 .140	.146 .166	.300 .380	.155 .161	1/8	1 1/4-12UNF-2B
M24217/ 7-040	5 NO. 16	1.760 1.740	1.510 1.530	1.073 1.087	.760 .740	.430 .440	.120 .140	.146 .166	.300 .380	.155 .161	1/8	1 1/2-12UNF-2B
M24217/ 7-041	9 NO. 16	2.010 1.990	1.760 1.780	1.198 1.208	.850 .830	.490 .500	.190 .210	.146 .166	.300 .380	.155 .161	1/8	1 3/4-12UN-2B
M24217/ 7-042	14 NO. 16	2.385 2.365	2.135 2.155	1.517 1.527	.850 .830	.490 .500	.190 .210	.160 .180	.300 .380	.204 .210	3/16	2 1/8-12UN-2B
M24217/ 7-043	24 NO. 16	2.760 2.740	2.510 2.530	1.885 1.895	.850 .830	.490 .500	.190 .210	.160 .180	.300 .380	.204 .210	3/16	2 1/2-12UN-2B
M24217/ 7-044	37 NO. 16	3.510 3.490	3.010 3.030	2.330 2.340	.974 .954	.552 .562	.190 .210	.185 .205	.300 .380	.264 .271	1/4	3-12UN-2B
M24217/ 7-045	48NO. 16	4.135 4.115	3.760 3.780	2.760 2.770	1.285 1.265	.720 .730	.220 .240	.265 .285	.630 .720	.264 .271	1/4	3 3/4-12UN-2B
M24217/ 7-046	3 NO. 12	2.010 1.990	1.760 1.780	1.298 1.208	1.372 1.302	.962 .972	.190 .210	.146 .166	.750 .840	.155 .161	1/8	1 3/4-12UN-2B
M24217/ 7-047	5 NO. 12 AND 3 NO. 8	2.385 2.365	2.135 2.155	1.517 1.527	1.372 1.302	.962 .972	.190 .210	.160 .180	.750 .840	.204 .210	3/16	2 1/8-12UN-2B
M24217/ 7-048	9 NO 12, 3 NO 4 & 3 NO 12 WITH 2 PB	2.740 2.760	2.510 2.530	1.885 1.895	1.372 1.302	.962 .972	.190 .210	.160 .180	.750 .840	.204 .210	3/16	2 1/2-12UN-2B
M24217/ 7-049	2 NO. 0 WITH 4 NO. 12	3.385 3.365	3.010 3.030	2.330 2.340	1.461 1.481	1.028 1.038	.190 .210	.185 .205	.750 .840	.264 .271	1/4	3-12UN-2B

Source: https://assist.dla.mil -- Downloaded: 202610-19T20:03Z
Check the source to verify that this is the current version before use.

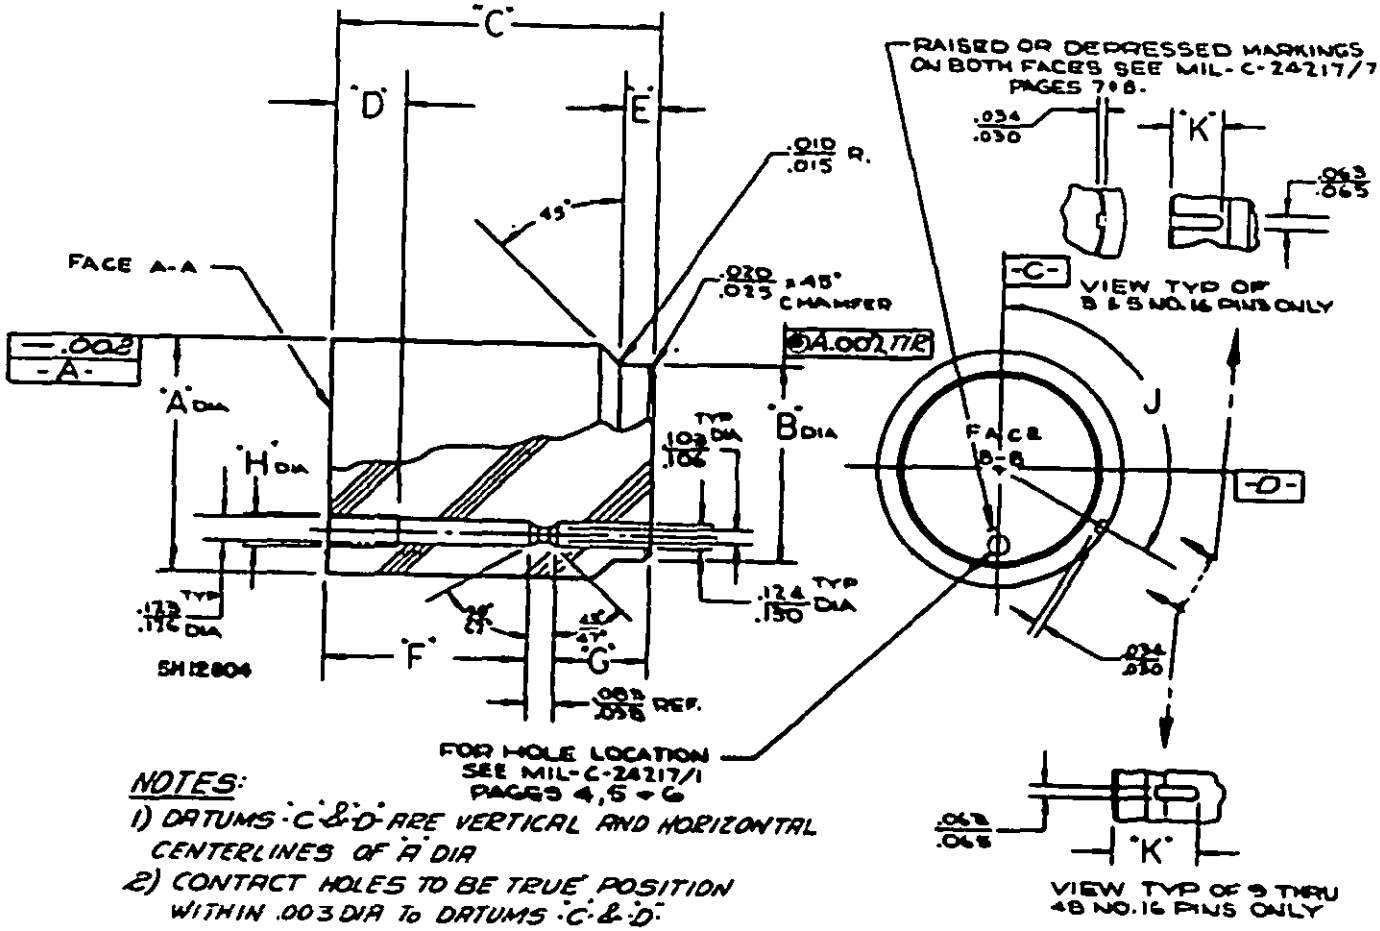

NOTES:

1. Datums -C- and -D- are vertical and horizontal centerlines of "A" diameter.
2. Contact holes to be true position within 0.003 diameter to datums -C- and -D-.


FIGURE 5. Insulator, front.

Source: https://assist.dla.mil -- Downloaded: 202610-19T20:03Z
Check the source to verify that this is the current version before use.

TABLE V. Dimensions for front insulator.

FRONT INS PART NUMBER	NO. & SIZE OF CONTACTS	A	B	C	D	E	F	G	H	J	K ±.005
M24217/ 7-050	3 NO. 16	.600 / .596	.482 / .478	1.169 / 1.164	—	.845 / .850	.633 / .638	.438 / .443	—	120°	.250
M24217/ 7-051	5 NO. 16	.724 / .720	.604 / .600	1.204 / 1.199	—	.845 / .850	.668 / .673	.438 / .443	—	180°	.250
M24217/ 7-052	9 NO. 16	.868 / .864	.748 / .744	1.516 / 1.511	—	.188 / .193	.980 / .985	.438 / .443	—	120°	.400
M24217/ 7-053	14 NO. 16	1.130 / 1.126	.952 / .948	1.516 / 1.511	—	.159 / .164	.980 / .985	.438 / .443	—	120°	.400
M24217/ 7-054	24 NO. 16	1.490 / 1.486	1.206 / 1.202	1.516 / 1.511	—	.105 / .110	.980 / .985	.438 / .443	—	120°	.400
M24217/ 7-055	37 NO. 16	1.810 / 1.806	1.450 / 1.446	2.016 / 2.011	.500 / .490	.132 / .137	1.480 / 1.485	.438 / .443	.154 / .160	120°	.450
M24217/ 7-056	48 NO. 16	2.246 / 2.242	1.998 / 1.994	2.270 / 2.265	.625 / .615	.132 / .137	1.495 / 1.500	.680 / .690	.154 / .160	120°	.400
M24217/ 7-064	5 NO. 16 (SPECIAL)	.624 / .620	.527 / .523	1.097 / 1.092	—	.856 / .861	.561 / .566	.438 / .443	—	180°	.250

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:03Z
Check the source to verify that this is the current version before use.

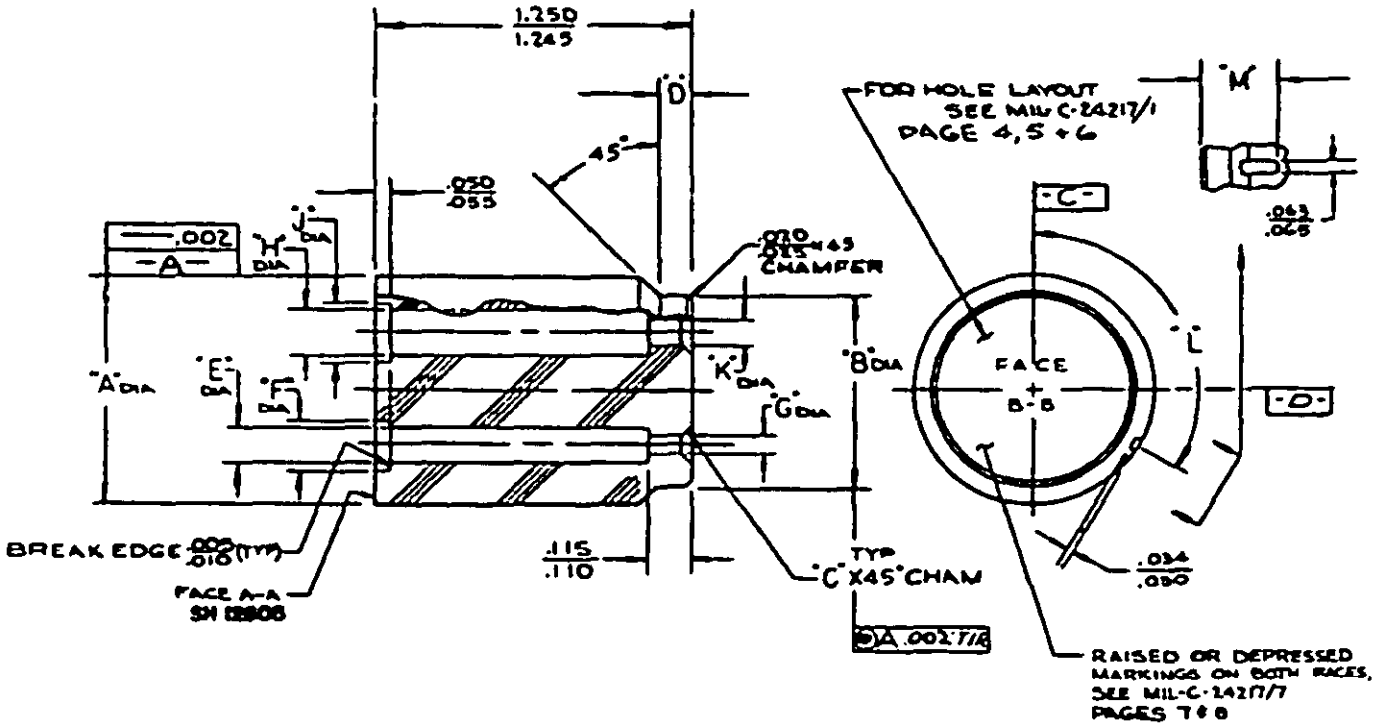

NOTES:

1. Datums -C- and -D- are vertical and horizontal centerlines of "A" diameter.
2. Contact holes to be true position within 0.003 diameter to datums -C- and -D-.

FIGURE 6. Insulator, front.

Source: https://assist.dla.mil -- Downloaded: 20261O-19T20:03Z
Check the source to verify that this is the current version before use.

TABLE VI. Dimensions for front insulator.

FRONT INS PART NUMBER	NO & SIZE OF CONTACTS	A	B	C	D	E	F	G	H	J	K	L	M ±.005	
M24217/7-057	3 NO. 12	.868 / .864	.748 / .744	1/32	.188 / .193	.202 / .204	.257 / .267	.111	—	—	—	120°	.400	
M24217/7-058	5 NO. 12	1.130 / 1.126	.952 / .948	1/32	.159 / .164	.202 / .204	.257 / .267	.111	—	—	—	120°	.400	
M24217/7-059	9 NO. 12	1.491 / 1.486	1.206 / 1.202	1/32	.105 / .110	.202 / .204	.257 / .267	.111	—	—	—	120°	.400	
M24217/7-060	3 NO 8	1.109 / 1.104	.826 / .822	1/16	.105 / .110	.260 / .247	.315 / .325	.159	—	—	—	120°	.400	
M24217/7-061	3 NO 4	1.491 / 1.486	1.206 / 1.202	1/16	.105 / .110	.385 / .387	.450 / .460	.245	—	—	—	120°	.400	
M24217/7-062	3 NO. 8 WITH 3 NO. 12	1.491 / 1.486	1.206 / 1.202	1/16	.105 / .110	.202 / .204	.257 / .267	.111	.262 / .260	.315 / .325	.159	120°	.400	
M24217/7-063	2 NO. 0 WITH 4 NO. 12	1.809 / 1.804	1.450 / 1.446	1/16	.132 / .137	.202 / .204	.257 / .267	.111	.590 / .592	.647 / .657	.375	120°	.450	

Source: https://assist.dla.mil -- Downloaded: 202610-19T20:03Z
Check the source to verify that this is the current version before use.

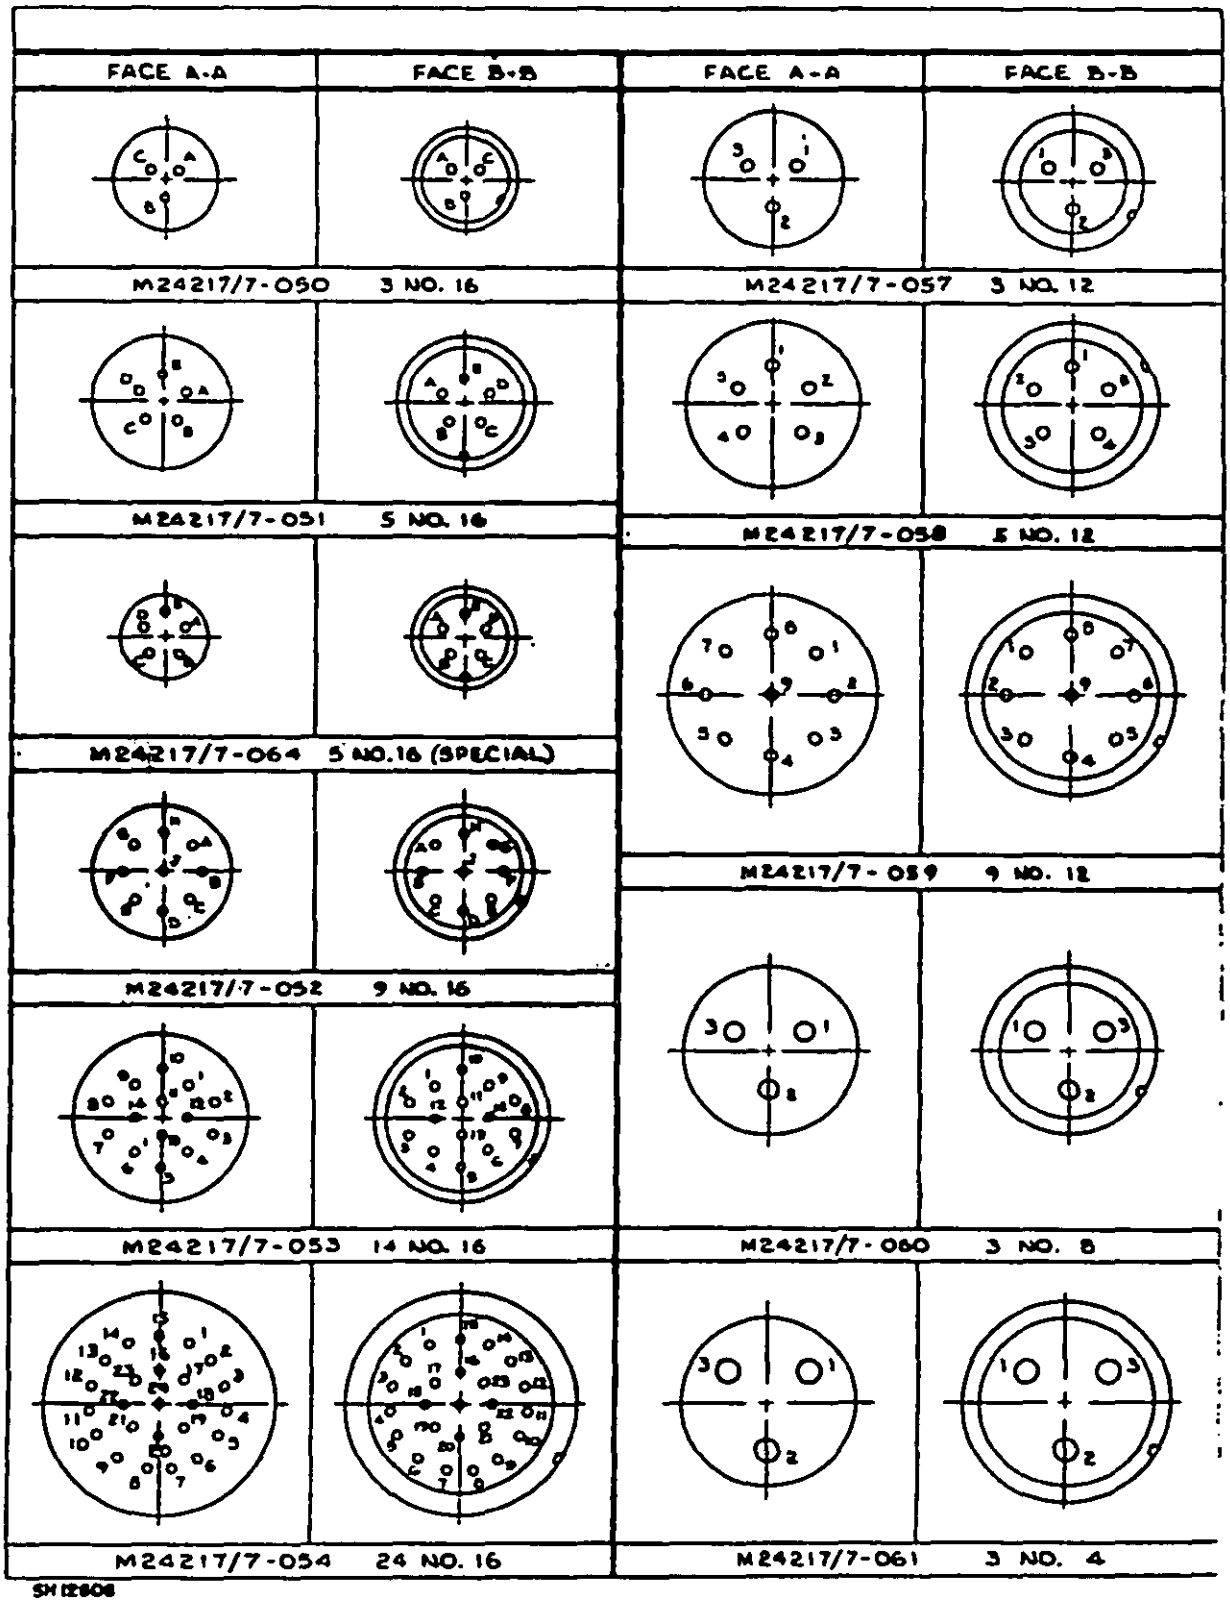


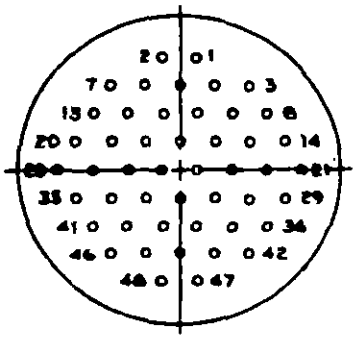
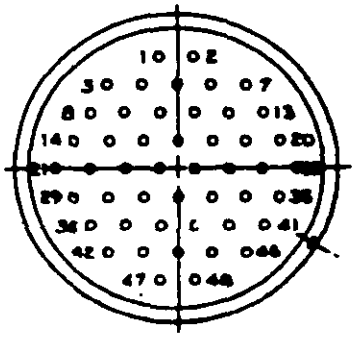






FIGURE 7. Contact arrangements and markings for front insulator.


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:03Z
Check the source to verify that this is the current version before use.

FRONT INSULATOR PART NUMBER	NO. & SIZE OF CONTACTS	FACE A-A	FACE B-B
M24217/7-055	37 NO. 16		
M24217/7-056	48 NO. 16		
M24217/7-062	3 NO. 8 & 3 NO. 12		
M24217/7-063	2 NO. 0 & 4 NO. 12		

SH12607

FIGURE 8. Contact arrangements and markings for front insulator.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:03Z
Check the source to verify that this is the current version before use.

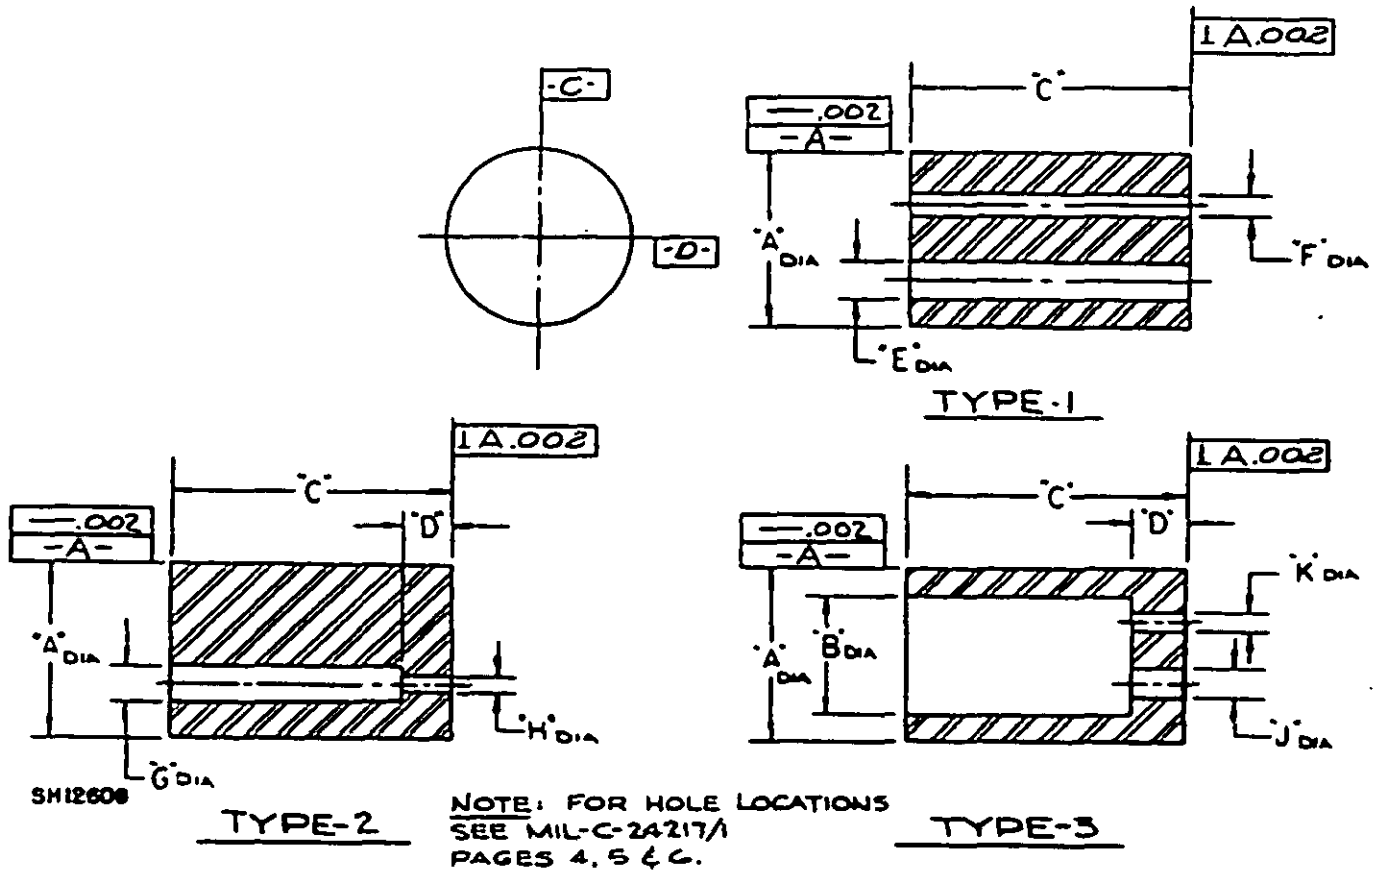

NOTES:

1. Datums -C- and -D- are vertical and horizontal centerlines of "A" diameter.
2. Contact holes to be true position within 0.003 diameter to datums -C- and -D-.

FIGURE 9. In line rear insulator.

Source: https://assist.dla.mil -- Downloaded: 20261O-19T20:03Z
Check the source to verify that this is the current version before use.

TABLE VII. Dimensions for in line rear insulator.

REAR INS PART NUMBER	SIZE & NO.OF CONTACTS	TYPE	A	B	C	D	E	F	G	H	J	K
M24217/7-071	3 NO.12	2	.868 / .864	—	1.375 / 1.370	.250	—	—	.220	.180	—	—
M24217/7-072	5 NO.12	2	1.130 / 1.126	—	1.747 / 1.742	.250	—	—	.220	.180	—	—
M24217/7-073	9 NO.12	2	1.491 / 1.486	—	1.747 / 1.742	.250	—	—	.220	.180	—	—
M24217/7-074	3 NO. 8	1	1.109 / 1.104	—	1.747 / 1.742	—	.281	—	—	—	—	—
M24217/7-075	3 NO.4	3	1.491 / 1.486	1.120 / 1.130	1.747 / 1.742	.520 / .500	—	—	—	—	.406	—
M24217/7-076	3 NO. 8 WITH 3 NO.12	3	1.491 / 1.486	1.140 / 1.150	1.747 / 1.742	.520 / .500	—	—	—	—	.281	.180
M24217/7-077	2 NO. 0 WITH 4 NO.12	1	1.809 / 1.804	—	1.995 / 1.990	—	.578	.180	—	—	—	—

Source: https://assist.dla.mil -- Downloaded: 202640-19T20:03Z
Check the source to verify that this is the current version before use.

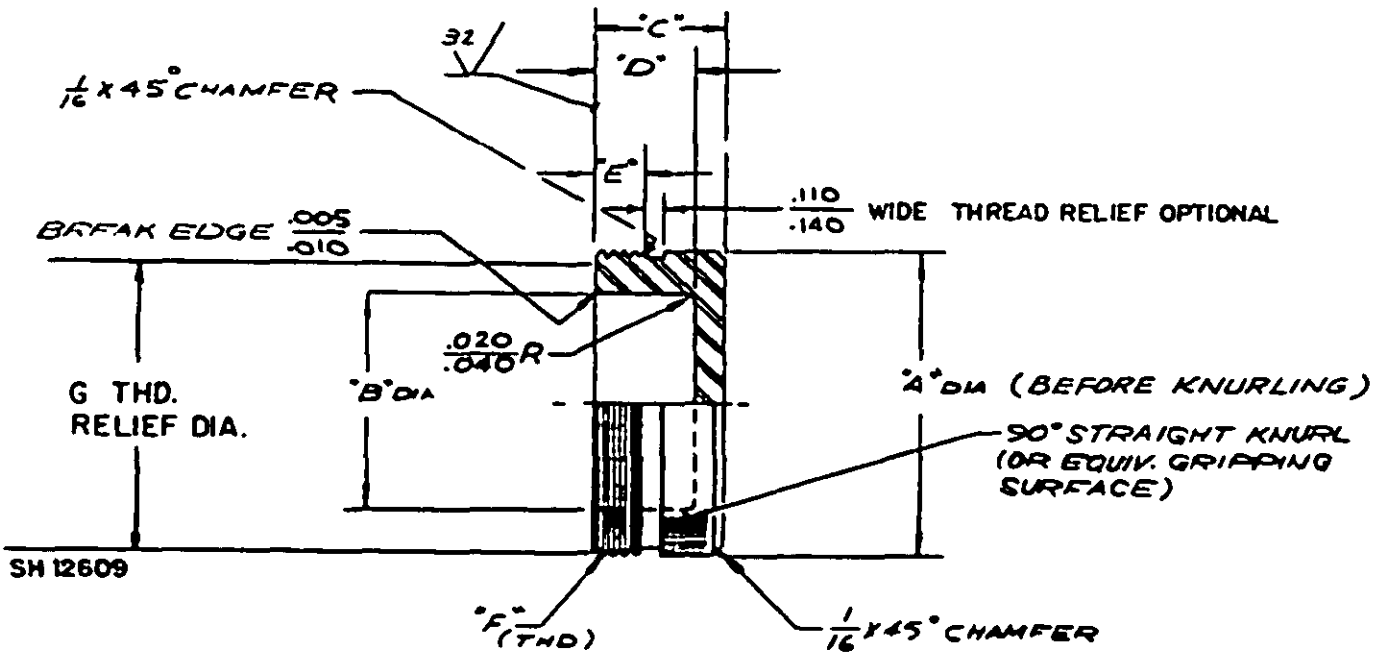



FIGURE 10. Protective cap.

Source: https://assist.dla.mil -- Downloaded: 20261O-19T20:03Z
Check the source to verify that this is the current version before use.

TABLE VIII. Dimensions for protective cap.

PROTECTIVE CAP PART NUMBER	NO. & SIZE OF CONTACTS	A	B	C	D	E	F (THD)	G DIA
M24217/7-078	3 NO. 16 5 NO. 16 (SPECIAL)	1.260 1.240	.667 .687	1.020 1.000	.750 .770	.350 .370	$1\frac{1}{4}$-12UNF-2A	1.13 1.11
M24217/7-079	5 NO. 16	1.510 1.490	.820 .840	1.020 1.000	.750 .770	.350 .370	$1\frac{1}{2}$-12UNF-2A	1.38 1.36
M24217/7-080	9 NO. 16	1.760 1.740	1.091 1.111	1.020 1.000	.750 .770	.350 .370	$1\frac{3}{4}$-12UN-2A	1.63 1.61
M24217/7-081	14 NO. 16	2.135 2.115	1.356 1.376	1.020 1.000	.750 .770	.350 .370	$2\frac{1}{8}$-12UN-2A	2.01 1.99
M24217/7-082	24 NO. 16	2.510 2.490	1.737 1.757	1.020 1.000	.750 .770	.350 .370	$2\frac{1}{2}$-12UN-2A	2.38 2.36
M24217/7-083	37 NO. 16	3.015 2.985	2.111 2.131	1.020 1.000	.750 .770	.350 .370	3-12UN-2A	2.88 2.86
M24217/7-084	48 NO. 16	3.765 3.735	2.562 2.582	1.355 1.335	1.025 1.045	.500 .520	$3\frac{3}{4}$-12UN-2A	3.63 3.61
M24217/7-085	3 NO. 12	1.760 1.740	1.091 1.111	1.483 1.463	1.213 1.233	.813 .833	$1\frac{3}{4}$-12UN-2A	1.63 1.61
M24217/7-086	5 NO. 12 AND 3 NO. 8	2.135 2.115	1.356 1.376	1.483 1.463	1.213 1.233	.813 .833	$2\frac{1}{8}$-12UN-2A	2.01 1.99
M24217/7-087	5 NO. 12, 3 NO. 4, & 3 #12 WITH 3 #8	2.510 2.490	1.737 1.757	1.483 1.463	1.213 1.233	.813 .833	$2\frac{1}{2}$-12UN-2A	2.38 2.36
M24217/7-088	2 NO. 0 WITH 4 NO. 12	3.015 2.985	2.111 2.131	1.483 1.463	1.213 1.233	.813 .833	3-12UN-2A	2.88 2.86

Source: https://assist.dla.mil -- Downloaded: 2026\40-19T20:03Z
Check the source to verify that this is the current version before use.

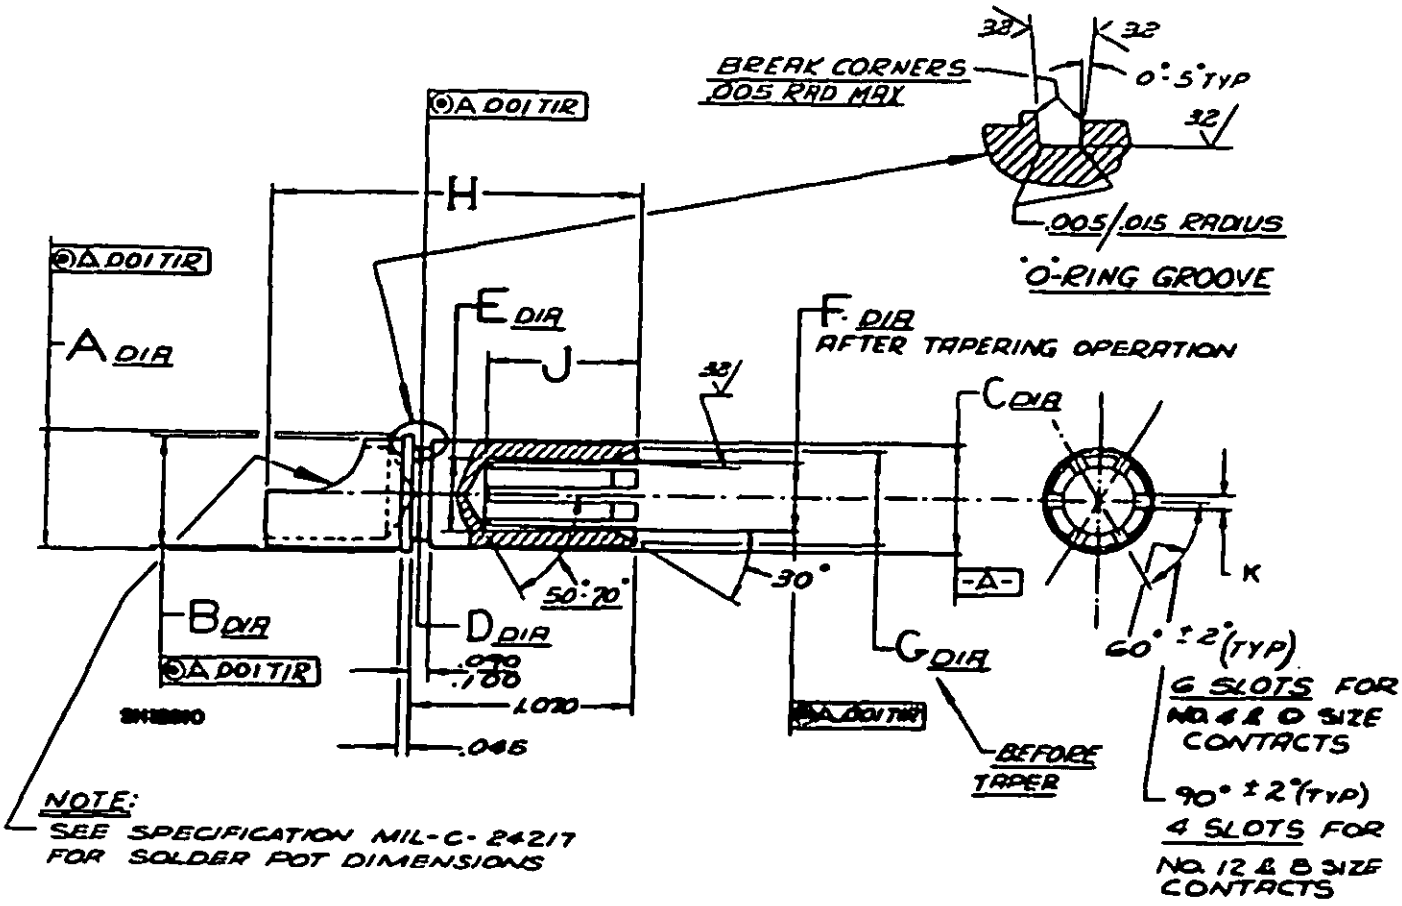

NOTES:

1. Taper must be uniform within 0.002.
2. Inside edges of slot to be free of burrs.
3. Locating on "C" diameter the center of each spring leaf, within 0.062 of its slotted end, must be 0.005 TIR after forming.

FIGURE 11. Socket contact.

Source: https://assist.dla.mil -- Downloaded: 20261O-19T20:03Z
Check the source to verify that this is the current version before use.

TABLE IX. Dimensions for socket contact.

SOCKET CONTACT PART NO.	SIZE OF CONTACT	A	B	C	D	E	F	G	H ±.010	J ±.886	K
M24217/7-089	#12	.852 / .248	.148 / .158	.190 / .108	.092 / .090	.096 / .102	.084 / .086	.140 / .145	1.500	.719	.030 / .040
M24217/7-090	#8	.312 / .308	.255 / .245	.248 / .246	.150 / .148	.144 / .150	.132 / .134	.185 / .190	1.500	.719	.030 / .040
M24217/7-091	#4	.438 / .442	.371 / .381	.372 / .374	.280 / .278	.227 / .233	.215 / .217	.344 / .349	1.750	.719	.050 / .060
M24217/7-092	#0	.638 / .642	.552 / .542	.580 / .582	.482 / .480	.359 / .363	.347 / .349	.491 / .496	1.750	.719	.050 / .060

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:03Z
Check the source to verify that this is the current version before use.

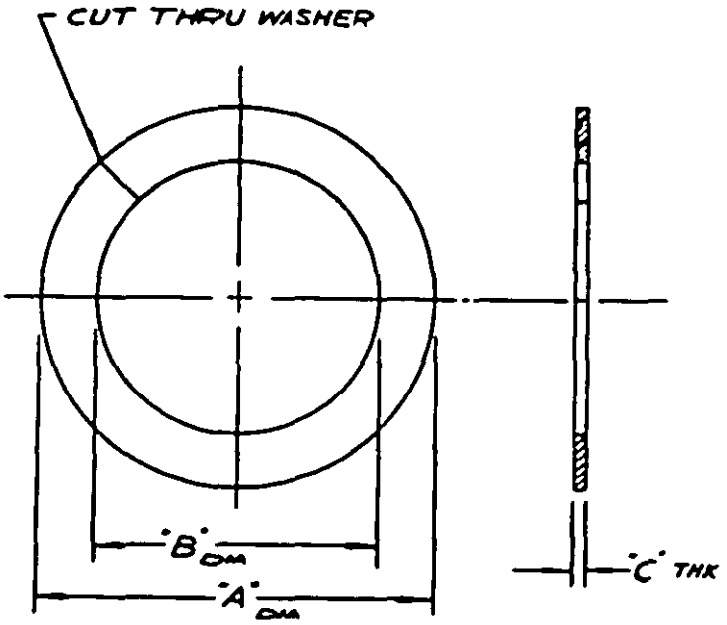


FIGURE 12. Thrust washer.

TABLE X. Dimensions for thrust washer.

WASHER PART NUMBER	SIZE & NO. OF CONTACTS	A	B	C
M24217/7-093	3 NO. 16 3 NO. 16 (SPECIAL)	1.265 1.235	.885 .915	.036 .026
M24217/7-094	5 NO. 16	1.515 1.485	1.077 1.107	.036 .026
M24217/7-095	9 NO. 16 AND 3 NO. 12	1.765 1.735	1.197 1.227	.036 .026
M24217/7-096	14 NO. 16, 5 NO. 12 & 3 NO. 8	2.015 1.985	1.512 1.542	.036 .026
M24217/7-097	24 NO. 16, 9 NO. 12, 3 NO. 4, & 3 NO. 8 WITH 3 NO. 12	2.515 2.485	1.985 1.915	.036 .026
M24217/7-098	37 NO. 16 2 NO. 0 WITH 4 NO. 12	3.015 2.985	2.325 2.355	.036 .026
M24217/7-099	48 NO 16	3.265 3.235	2.760 2.790	.062 .072

Source: https://assist.dla.mil -- Downloaded: 20260410-19T20:03Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Dimensions and configuration: See figures and tables.
2. Dimensions shown in plug shell "B" column are applicable for that portion of the shell that fits into the mold cavity. Dimensions on the remaining "B" diameter area may be increased or decreased by 0.004 inch as applicable.
3. Optional lock wire shall be of nickel copper in accordance with MS20995.
4. Part numbers M24217/7-022 and M24217/7-023 shall not be used for new design applications.

Preparing activity:
Navy - SH
(Project 5935-N246-7)

☆U.S. GOVERNMENT PRINTING OFFICE: 1984—705-040/A4473

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:03Z
Check the source to verify that this is the current version before use.