MILITARY SPECIFICATION SHEET

PRESSURE PROOF PLUG CAP ASSEMBLY

This specification sheet is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the plug cap assembly described herein shall consist of this document and the latest issue of MIL-C-24217.

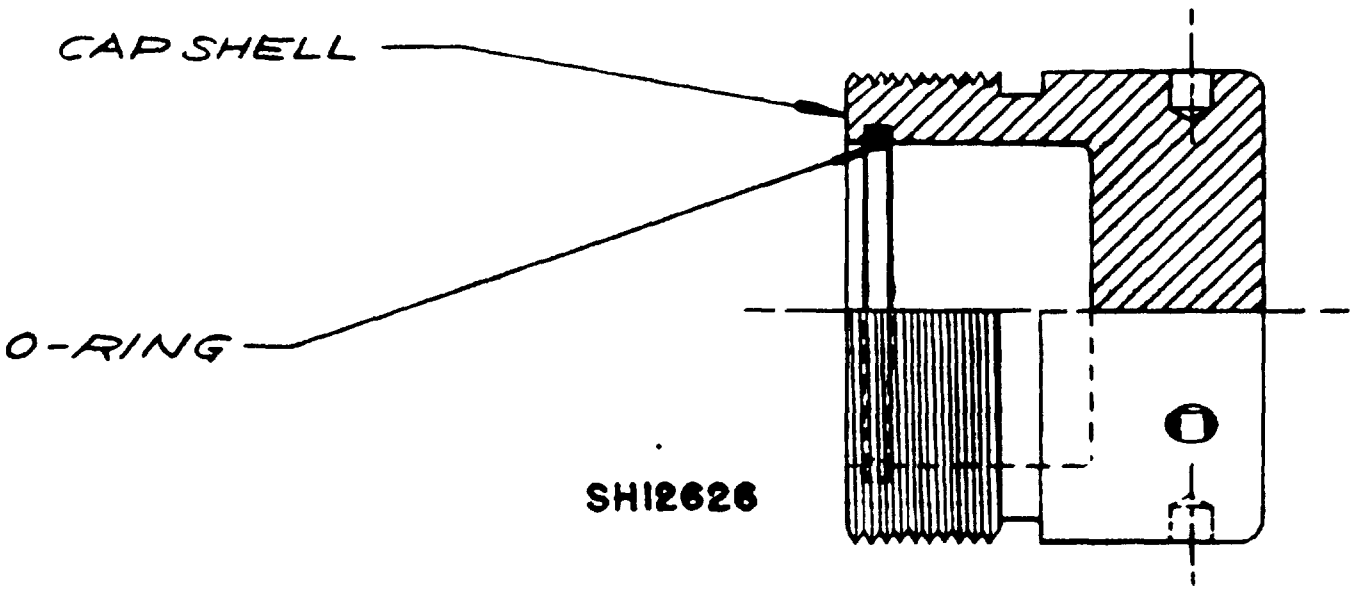


FIGURE 1. Configuration.

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:04Z
Check the source to verify that this is the current version before use.

TABLE I. Part numbers for pressure proof plug cap assemblies.

CAP ASSEMBLY NUMBER	FOR CONNECTOR TYPE	CAP SHELL	O-RING AS-568A
M24217/9-001	3 NO. 16 & 5 NO. 16 (SPECIAL)	M24217/ 9-025	-114
M24217/9-002	5 NO. 16	M24217/ 9-026	-117
M24217/9-003	9 NO. 16 & 3 NO. 12	M24217/ 9-027	-121
M24217/9-004	14 NO. 16 14 NO. 16 (SPEC), 5 NO. 12 & 3 NO. 8	M24217/ 9-028	-125
M24217/9-005	24 NO. 16, 3 NO. 4, 9 NO. 12, & 3 NO. 8 WITH 3 NO. 12	M24217/ 9-029	-131
M24217/9-006	37 NO 16 & 2 NO 0 WITH 4 NO. 12	M24217/ 9-030	-137
M24217/9-007	48 NO. 16	M24217/ 9-031	-144
M24217/9-008	8 NO. 16	M24217/ 9-032	-117
M24217/9-009	3 NO. 0	M24217/ 9-033	-141

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:04Z
Check the source to verify that this is the current version before use.

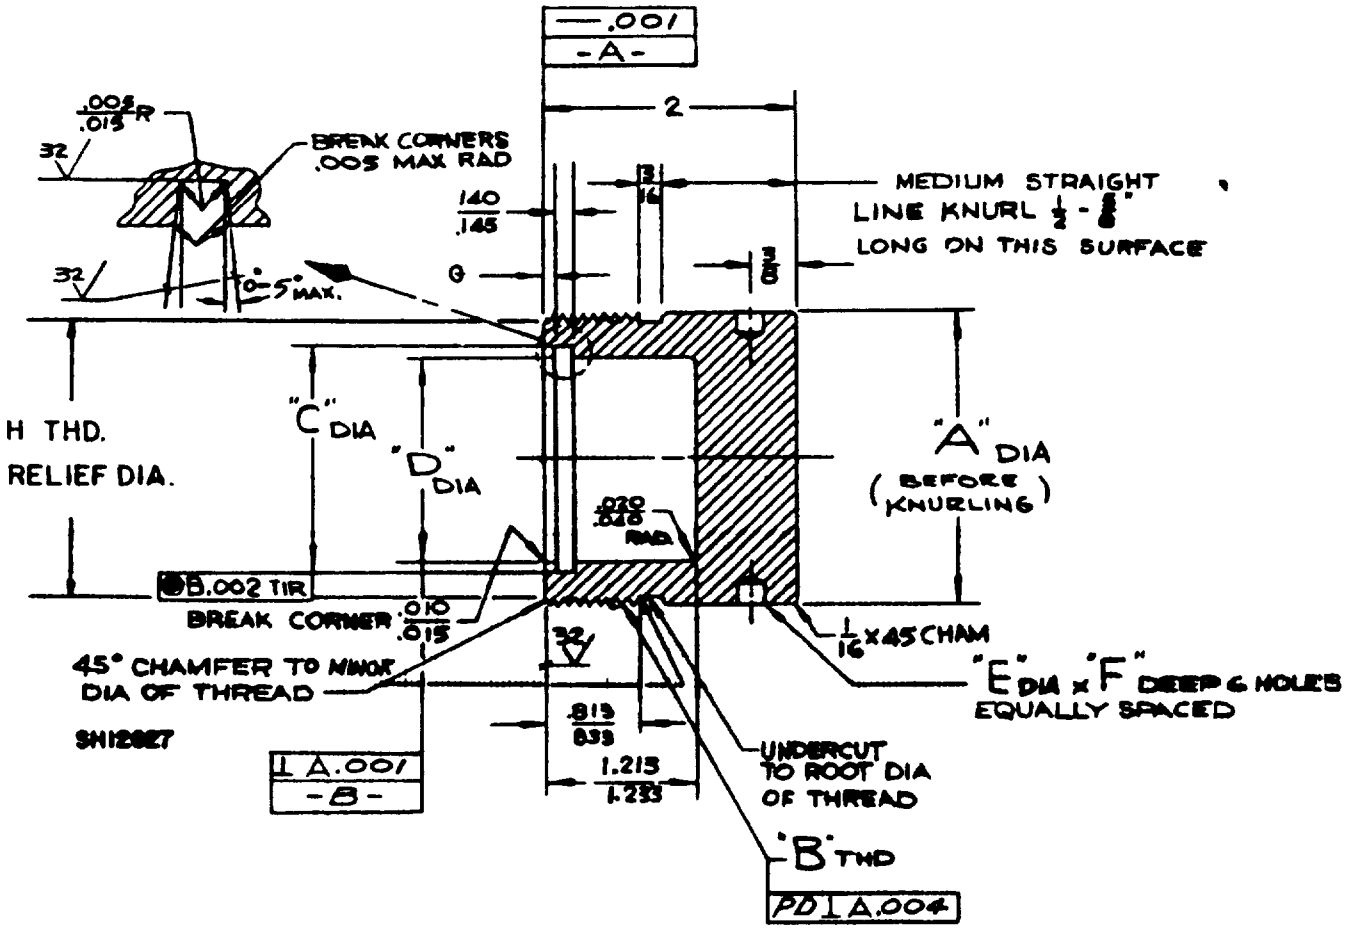


FIGURE 2. Pressure proof plug cap shell.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:04Z
Check the source to verify that this is the current version before use.

TABLE II. Dimensions.

PP CAP SHELL PART NUMBER	CONNECTOR TYPE	"A"	"B"(THD)	"C"	"D"	E ±.889	"F"	G	H
M24217/9-025	3 NO.16 & 5 NO.16 (SPECIAL)	1 1/4	1 1/4-12UNF-2A	.795 / .797	.625 / .628	218	3/16	104 / .109	1.13 / 1.11
M24217/9-026	5 NO.16	1 1/2	1 1/2-12UNF-2A	.980 / 982	.814 / 817	.218	3/16	.104 / .109	1.38 / 1.36
M24217/9-027	9 NO.16 & 3 NO.12	1 3/4	1 3/4-12UN-2A	1.230 / 1.232	1060 / 1.063	.218	3/16	.104 / 109	1.63 / 1.61
M24217/9-028	14 NO.16, 14 NO.16 (SPEC) 5 NO.12 & 3 NO.8	2 1/8	2 1/8-12UN-2A	1.480 / 1.482	1313 / 1316	.218	3/16	.104 / 109	2.01 / 1.99
M24217/9-029	24 NO.16, 3 NO.4, 9 NO.12, & 3 NO.8 WITH 3 NO.12	2 1/2	2 1/2-12UN-2A	1.867 / 1.869	1695 / 1698	.218	3/16	.136 / 141	2.38 / 2.36
M24217/9-030	37 NO 16 & 2 NO.0 WITH 4 NO 12	3	3-12UN-2A	2245 / 2.247	2.071 / 2.074	.218	3/16	.140 / .145	2.88 / 2.86
M24217/9-031	48 NO.16	3 3/4	3 3/4-12UN-2A	2.662 / 2.664	2.502 / 2.505	.281	1/4	.150 / .155	3.63 / 3.61
M24217/9-032	8 NO. 16	1 3/8	1 3/8-12UN-2A	.980 / .982	.814 / .817	.218	3/16	.104 / .109	126 / 1.24
M24217/9-033	3 NO. 0	3 1/4	3 1/4-12UN-2A	2.474 / 2.476	2.315 / 2.318	.281	1/4	145 / .150	3.13 / 3.11

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:04Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Dimensions and configurations: See figures and tables.

Preparing activity:
Navy - SH
(Project 5935-N246-9)

☆U S GOVERNMENT PRINTING OFFICE 1984—705-040/A4542

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:04Z
Check the source to verify that this is the current version before use.