MILITARY SPECIFICATION SHEET

RECEPTACLE ASSEMBLY (WELDED TYPE)

This specification sheet is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the receptacle assembly described herein shall consist of this document and the latest issue of MIL-C-24217.

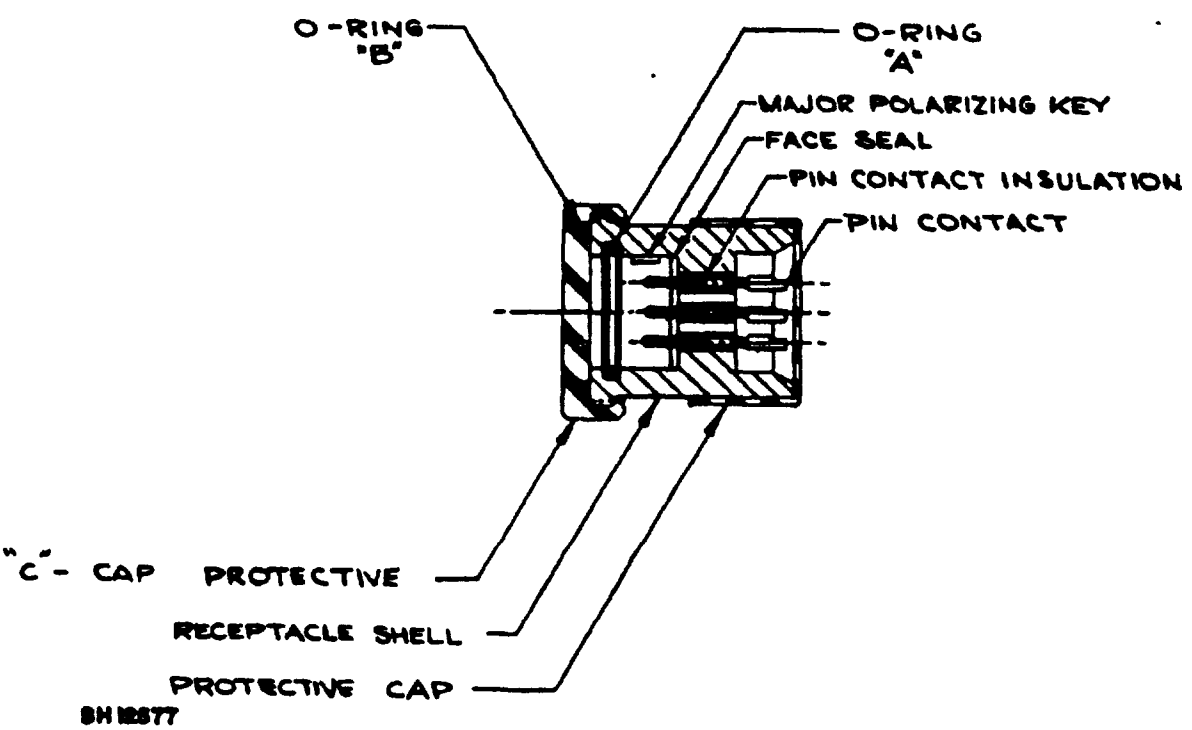


FIGURE 1. Configuration of receptacle assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:02Z
Check the source to verify that this is the current version before use.

TABLE I. Parts description.

RECEPTACLE ASSY NO.	RECEPTACLE SHELL NO.	NO. OF CONTACTS & PIN SIZE	"A" O-RING	"B" O-RING	"C" PROTECTIVE CAP
M24217/1-001	M24217/1-025	3 NO.16	AS-568A-114	AS-568A-117	M24217/1-040
M24217/1-002	M24217/1-026	5 NO.16	AS-568A-117	AS-568A-121	M24217/1-041
M24217/1-003	M24217/1-027	9 NO.16	AS-568A-121	AS-568A-125	M24217/1-042
M24217/1-004	M24217/1-028	14 NO.16	AS-568A-125	AS-568A-129	M24217/1-043
M24217/1-005	M24217/1-029	24 NO.16	AS-568A-131	AS-568A-134	M24217/1-044
M24217/1-006	M24217/1-030	37 NO.16	AS-568A-137	AS-568A-140	M24217/1-045
M24217/1-007	M24217/1-031	48 NO.16	AS-568A-144	AS-568A-148	M24217/1-046
M24217/1-008	M24217/1-032	3 NO.12	AS-568A-121	AS-568A-125	M24217/1-047
M24217/1-009	M24217/1-033	5 NO.12	AS-568A-125	AS-568A-129	M24217/1-048
M24217/1-010	M24217/1-034	9 NO.12	AS-568A-131	AS-568A-134	M24217/1-049
M24217/1-011	M24217/1-035	3 NO. 8	AS-568A-125	AS-568A-129	M24217/1-048
M24217/1-012	M24217/1-036	3 NO. 4	AS-568A-131	AS-568A-134	M24217/1-049
M24217/1-013	M24217/1-037	3 NO.12 3 NO. 8	AS-568A-131	AS-568A-134	M24217/1-049
M24217/1-014	M24217/1-038	2 NO. 0 4 NO.12	AS-568A-137	AS-568A-140	M24217/1-050
M24217/1-015	M24217/1-039	5 NO. 16 SPECIAL	AS-568A-114	AS-568A-117	M24217/1-040

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:02Z
Check the source to verify that this is the current version before use.

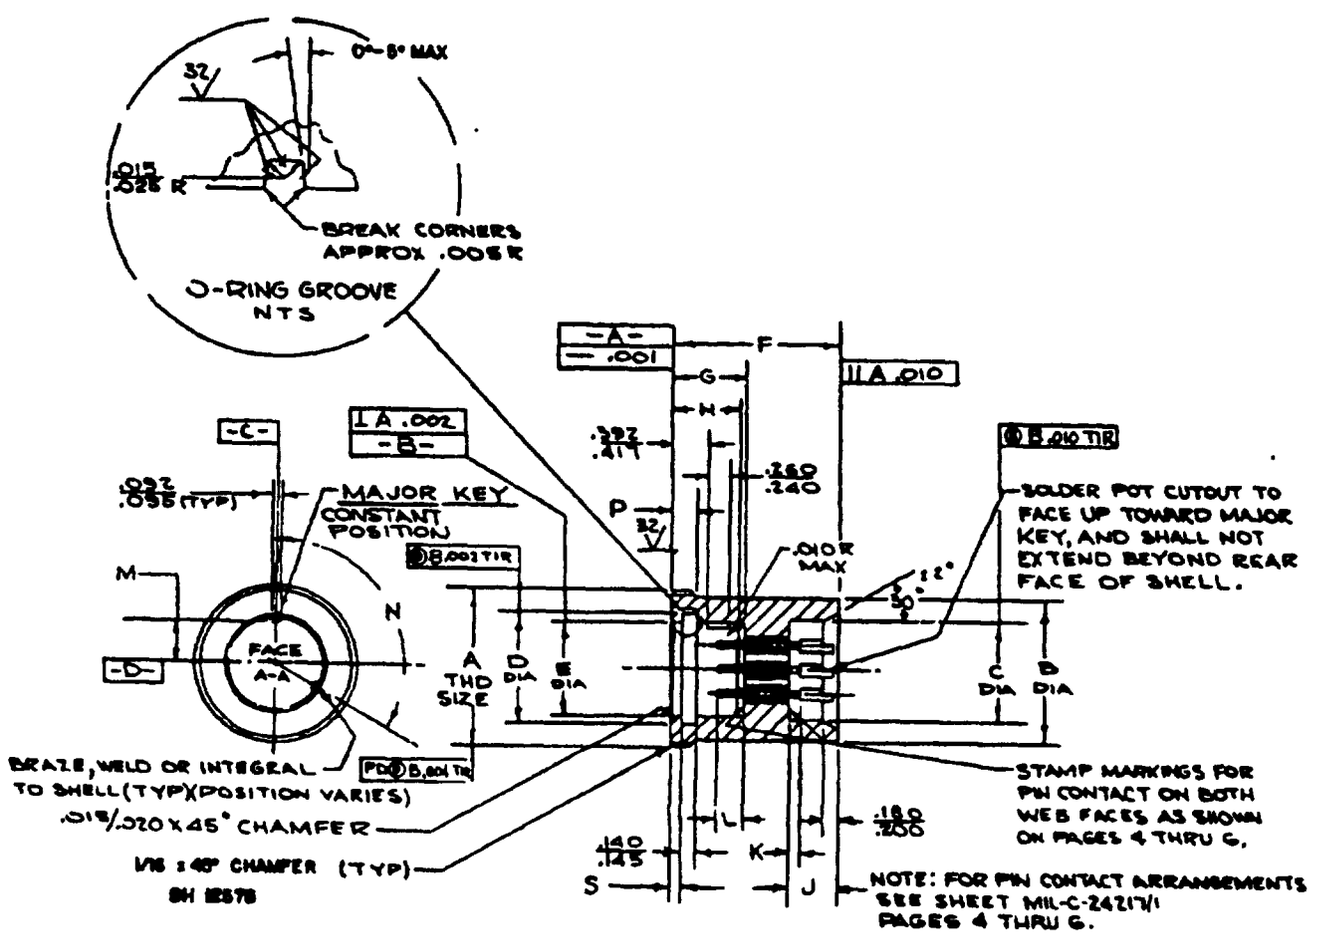


FIGURE 2. Receptacle shell (welded type).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:02Z
Check the source to verify that this is the current version before use.

TABLE II. Dimensions.

PART NO.	NO. OF CONTACTS & PIN SIZE	A	B	C	D	E	F	G	H	J	K (MIN)	L	M	N	P	S
M24217/1-025	3 NO.16	1 1/4-12 UNF-2A	1.130 / 1.120	.630 / .680	.795 / .797	.629 / .681	1.627 / 1.601	.787 / .792	.740 / .760	.560 / .570	.115	.313 / .327	.246 / .256	120°	.270 / .250	.104 / .109
M24217/1-026	5 NO.16	1 1/2-12 UNF-2A	1.375 / 1.365	.830 / .880	.984 / .986	.818 / .820	1.752 / 1.752	.787 / .792	.740 / .760	.560 / .570	.115	.313 / .327	.312 / .322	120°	.270 / .250	.104 / .109
M24217/1-027	9 NO.16	1 7/8-12 UN-2A	1.880 / 1.880	1.120 / 1.130	1.280 / 1.282	1.064 / 1.062	1.877 / 1.851	.787 / .792	.740 / .760	.560 / .570	.115	.313 / .327	.446 / .456	120°	.270 / .250	.104 / .109
M24217/1-028	14 NO.16	2 1/8-12 UN-2A	1.967 / 1.967	1.360 / 1.370	1.480 / 1.482	1.314 / 1.316	2.002 / 1.982	.787 / .792	.740 / .760	.560 / .570	.115	.313 / .327	.574 / .584	120°	.270 / .250	.104 / .109
M24217/1-029	24 NO.16	2 3/8-12 UN 2A	2.343 / 2.333	1.750 / 1.760	1.862 / 1.864	1.696 / 1.698	2.127 / 2.101	.787 / .792	.740 / .760	.560 / .570	.115	.313 / .327	.765 / .775	120°	.270 / .250	.196 / .141
M24217/1-030	37 NO. 16	3-12 UN-2A	2.875 / 2.865	1.990 / 2.000	2.287 / 2.289	2.071 / 2.073	2.127 / 2.101	.787 / .792	.740 / .760	.560 / .570	.115	.313 / .327	.980 / .960	120°	.270 / .250	.140 / .145
M24217/1-031	48 NO. 16	3 3/4-12 UN-2A	3.750 / 3.740	2.375 / 2.385	2.662 / 2.671	2.303 / 2.305	2.470 / 2.480	1.000 / 1.006	1.015 / 1.005	.760 / .570	.115	.550 / .556	1.172 / 1.182	120°	.346 / .316	.190 / .155
M24217/1-032	3 NO. 12	1 3/4-12 UN-2A	1.570 / 1.580	1.120 / 1.130	1.280 / 1.282	1.064 / 1.066	1.890 / 1.870	1.250 / 1.255	1.200 / 1.220	.870 / .880	.170	.750 / .718	.446 / .456	120°	.707 / .687	.104 / .109
M24217/1-033	5 NO.12	2 1/8-12 UN-2A	1.980 / 1.970	1.360 / 1.370	1.480 / 1.482	1.314 / 1.316	1.890 / 1.870	1.250 / 1.255	1.200 / 1.220	.870 / .880	.170	.750 / .718	.574 / .584	120°	.707 / .687	.104 / .109
M24217/1-034	9 NO.12	2 3/8-12 UN-2A	2.312 / 2.302	1.750 / 1.760	1.862 / 1.864	1.696 / 1.698	1.890 / 1.870	1.250 / 1.255	1.200 / 1.220	.870 / .880	.170	.750 / .718	.765 / .775	120°	.707 / .687	.196 / .141
M24217/1-035	3 NO. 8	2 1/8-12 UN-2A	1.980 / 1.970	1.360 / 1.370	1.480 / 1.482	1.314 / 1.316	1.890 / 1.870	1.250 / 1.255	1.200 / 1.220	.870 / .880	.170	.750 / .718	.574 / .584	120°	.707 / .687	.104 / .109
M24217/1-036	3 NO. 4	2 3/8-12 UN-2A	2.312 / 2.302	1.750 / 1.760	1.862 / 1.864	1.696 / 1.698	1.890 / 1.870	1.250 / 1.255	1.200 / 1.220	.870 / .880	.170	.750 / .718	.765 / .775	120°	.707 / .687	.196 / .141
M24217/1-037	3 NO.12 3 NO. 8	2 3/8-12 UN-2A	2.312 / 2.302	1.750 / 1.760	1.862 / 1.864	1.696 / 1.698	1.890 / 1.870	1.250 / 1.255	1.200 / 1.220	.870 / .880	.170	.750 / .718	.765 / .775	120°	.707 / .687	.196 / .141
M24217/1-038	2 NO. 0 4 NO. 12	3-12 UN-2A	2.875 / 2.865	1.990 / 2.000	2.287 / 2.289	2.071 / 2.073	2.890 / 2.870	1.250 / 1.255	1.200 / 1.220	.870 / .880	.170	.750 / .718	.980 / .960	120°	.707 / .687	.140 / .145
M24217/1-039	6 NO. 16 (SPECIAL)	1 1/4-12 UNF-2A	1.130 / 1.120	.670 / .680	.795 / .797	.629 / .681	1.627 / 1.607	.787 / .792	.740 / .760	.560 / .570	.115	.313 / .327	.270 / .275	0°	.270 / .250	.104 / .109

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:02Z
Check the source to verify that this is the current version before use.

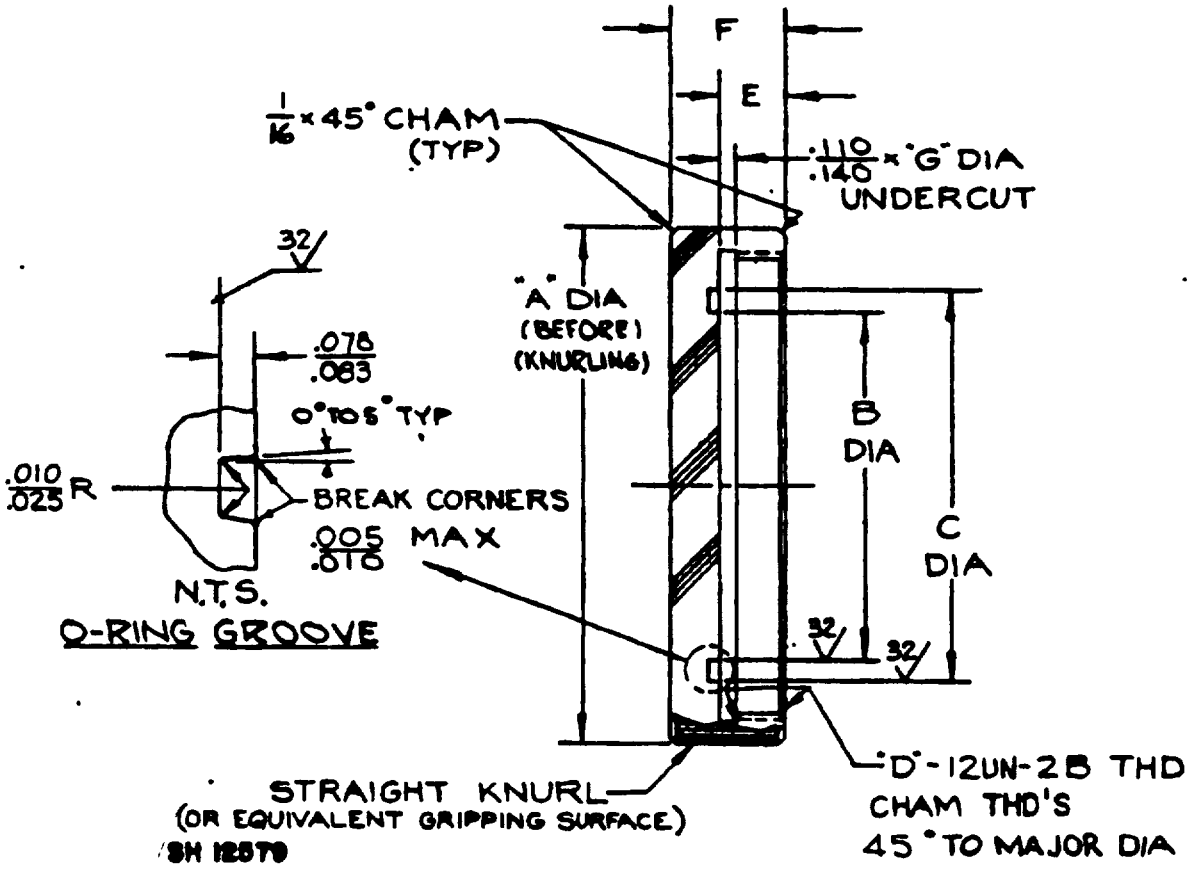



FIGURE 3. Protective cap (for receptacles).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:02Z
Check the source to verify that this is the current version before use.

TABLE III. Dimensions.

PART NO.	SIZE	A	B	C	D DIA THD	E	F	G
M24217/1-040	3 NO 16 5 NO 16 SPECIAL	1.510 1.490	.818 .813	1 1/8	1 1/4	.300 .320	.570 .550	1 5/16
M24217/1-041	5 NO. 16	1.885 1.865	1.075 1.070	1 3/8	1 1/2	.300 .320	.570 .550	1 9/16
M24217/1-042	9 NO. 16	2.010 1.990	1.325 1.320	1 5/8	1 3/4	.300 .320	.570 .550	1 13/16
M24217/1-043	14 NO. 16	2.385 2.365	1.575 1.570	1 7/8	2 1/8	.300 .320	.570 .550	2 3/16
M24217/1-044	24 NO. 16	2.760 2.740	1.885 1.880	2 3/16	2 1/2	.300 .320	.570 .550	2 9/16
M24217/1-045	37 NO. 16	3.385 3.365	2.260 2.255	2 9/16	3	.300 .320	.570 .550	3 1/16
M24217/1-046	48 NO. 16	4.160 4.105	2.770 2.765	3 1/8	3 3/4	.500 .520	.890 .870	3 13/16
M24217/1-047	3 NO. 12	2.010 1.990	1.325 1.320	1 5/8	1 3/4	.740 .760	1.010 .990	1 13/16
M24217/1-048	3 NO 8 5 NO 12	2.385 2.365	1.575 1.570	1 7/8	2 1/8	.740 .760	1.010 .990	2 3/16
M24217/1-049	3 NO 4 9 NO 12 3 NO 12 WITH 3 NO 8	2.760 2.740	1.885 1.880	2 3/16	2 1/2	.740 .760	1.010 .990	2 9/16
M24217/1-050	2 NO 0 WITH 4 NO 12	3.390 3.360	2.260 2.255	2 9/16	3	.740 .760	1.010 .990	3 1/16

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:02Z
Check the source to verify that this is the current version before use.

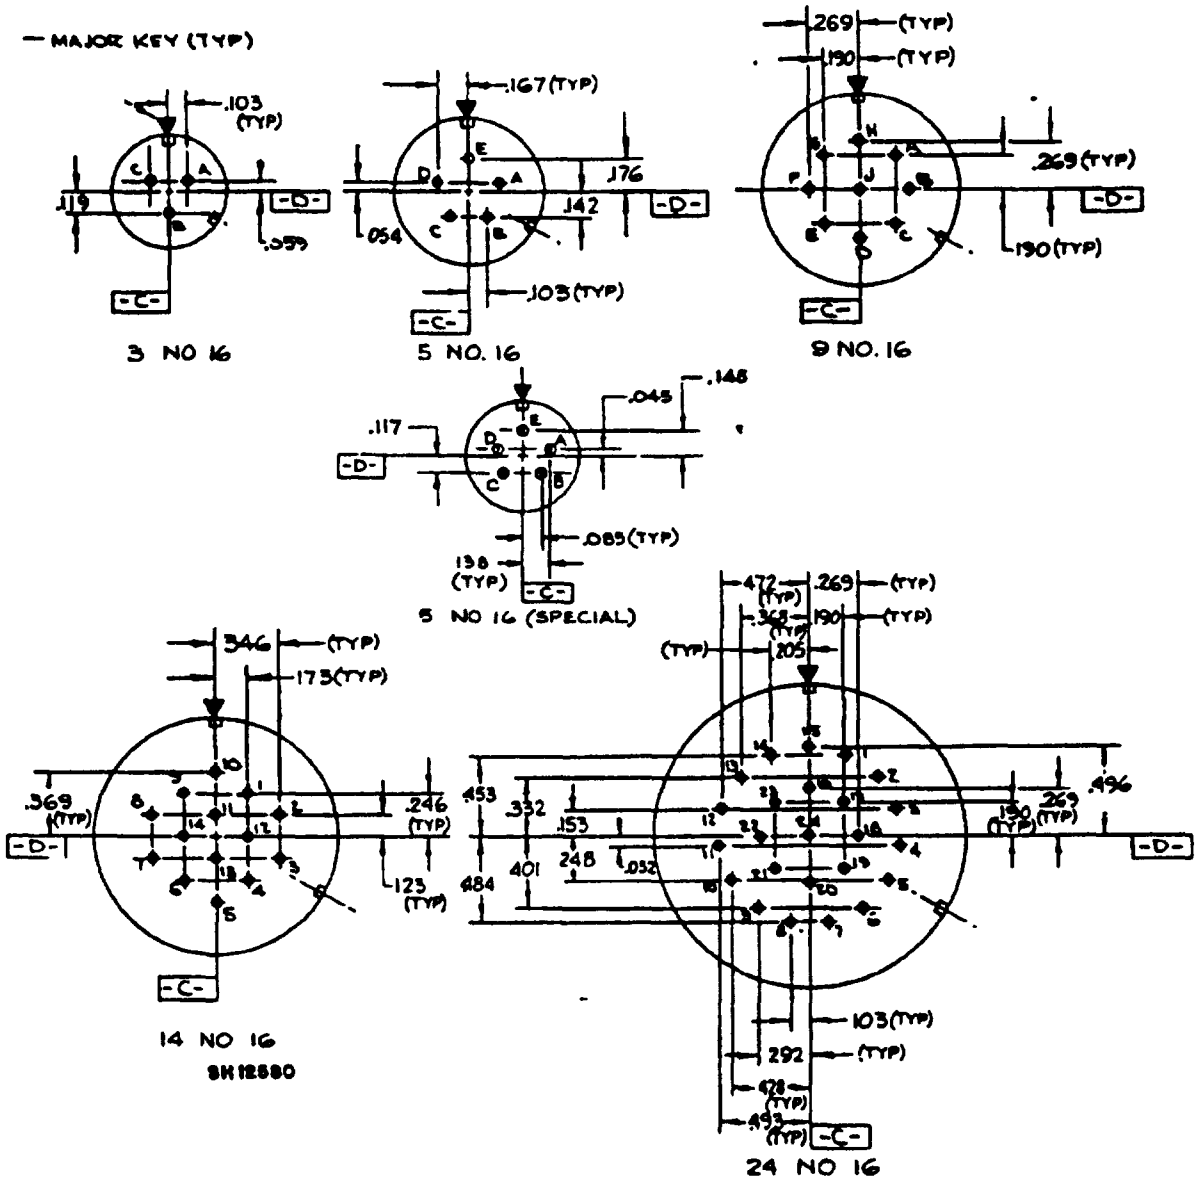


NOTES:

1. View looking at front face of receptacle (face A-A).
2. Datums -C- and -D- are vertical and horizontal center lines of the receptacle bore diameter or plug front insulator o.d., their point of intersection having a true position within 0.003 diameter.
3. Pin contacts and socket contact holes to be true position within 0.003 diameter to datums -C- and -D-.

FIGURE 4. Pin arrangements.


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:02Z
Check the source to verify that this is the current version before use.

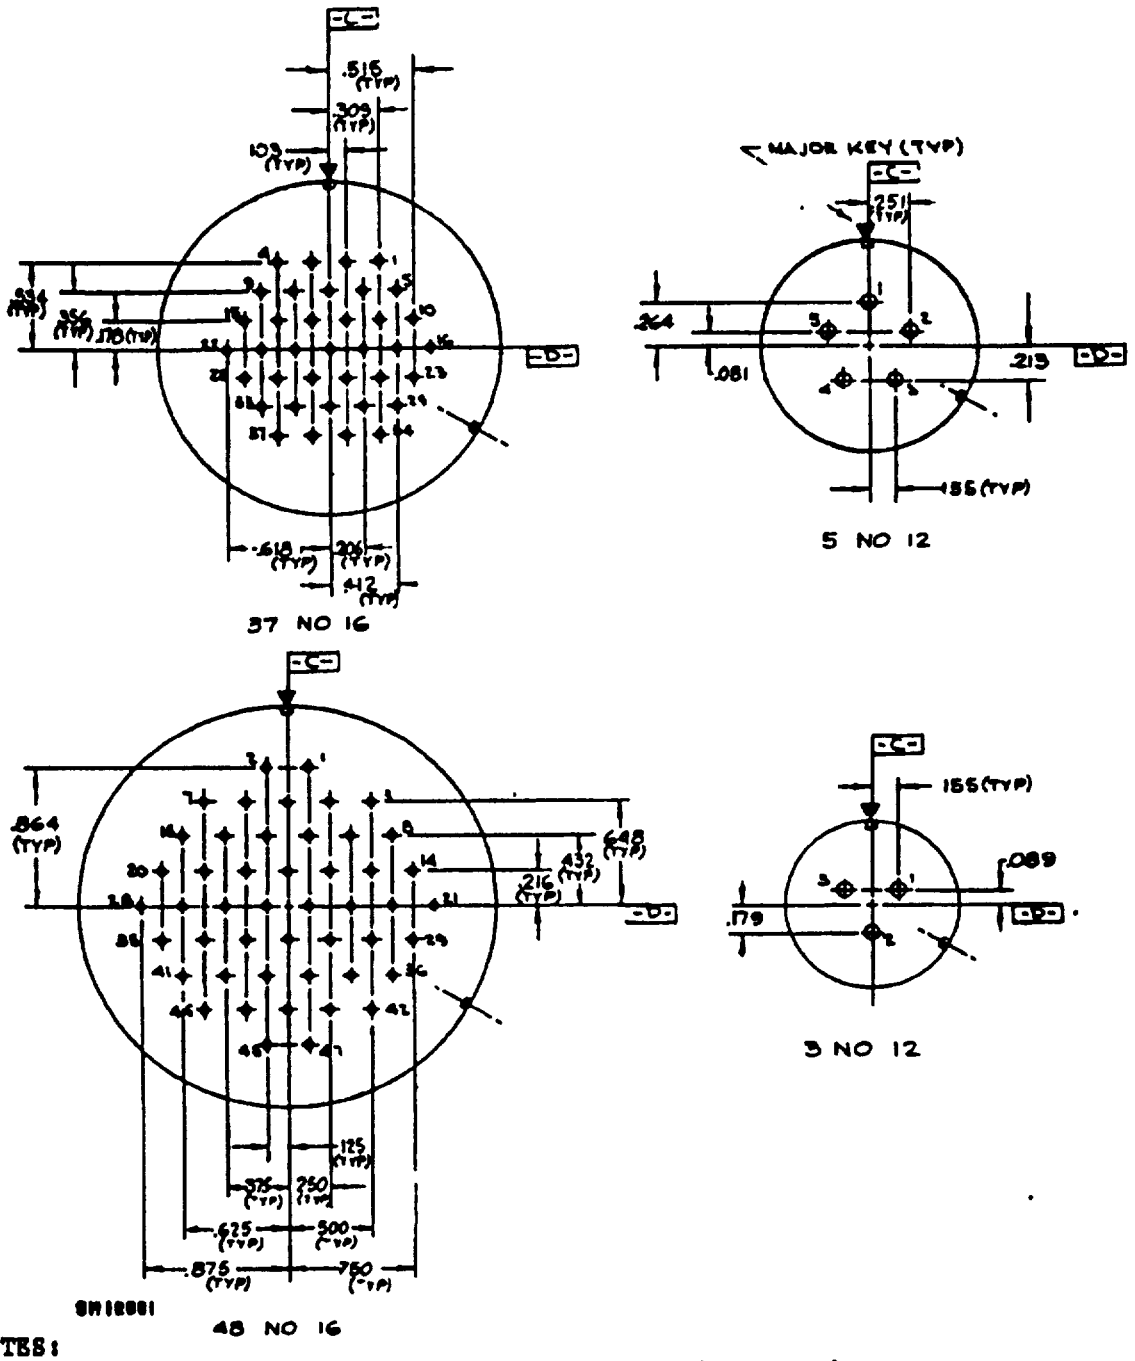

NOTES:
1. View looking at front face of receptacle (face A-A).
2. Datums -C- and -D- are vertical and horizontal center lines of the receptacle bore diameter or plug front insulator o.d., their point of intersection having a true position within 0.003 diameter.
3. Pin contacts and socket contact holes to be true position within 0.003 diameter to datums -C- and -D-.

FIGURE 5. Pin arrangements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:02Z
Check the source to verify that this is the current version before use.

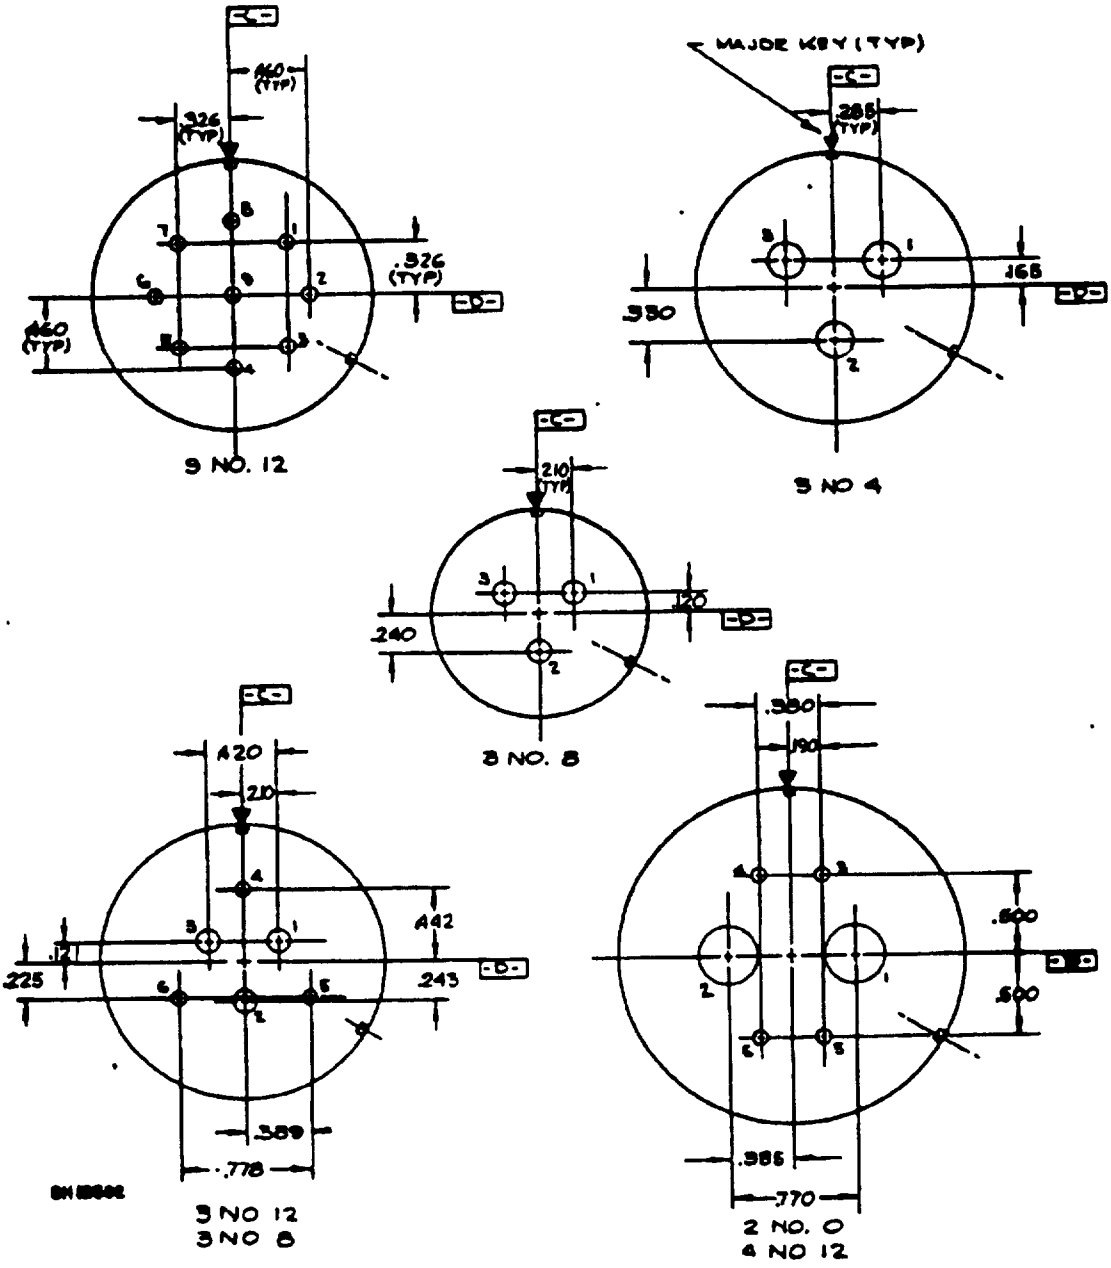

NOTES:
1. View looking at front face of receptacle (face A-A).
2. Datums -C- and -D- are vertical and horizontal center lines of the receptacle bore diameter or plug front insulator o.d., their point of intersection having a true position within 0.003 diameter.
3. Pin contacts and socket contact holes to be true position within 0.003 diameter to datums -C- and -D-.

FIGURE 6. Pin arrangements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:02Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Dimensions and configuration: See figures and tables.
2. Contact gasket (face seal) shall be molded and secured to the receptacle web with adhesive or poured in place using a clear RTV silicone, General Electric RTV 615 with General Electric SS-4120 primer or equal. Either method shall prevent the entrance of water under the seal.
3. Arrangement and location of contact holes in premolded contact gaskets shall be in accordance with figures 4, 5 or 6, as applicable. Holes shall be 0.006 to 0.010 inch smaller than the corresponding pin sizes.
4. Receptacle assemblies shall be packaged as shown in the assembly view (protective cover tightened to compress the O-ring), except that the indicator O-ring ("A") shall be separately packaged.

Preparing activity:
Navy - SH
(Project 5935-N246-1)

☆U.S. GOVERNMENT PRINTING OFFICE: 1984 — 706-040/A4503

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:02Z
Check the source to verify that this is the current version before use.