MILITARY SPECIFICATION SHEET

RECEPTACLE ASSEMBLY (IN LINE TYPE)

This specification sheet is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the receptacle assembly described herein shall consist of this document and the latest issue of MIL-C-24217.

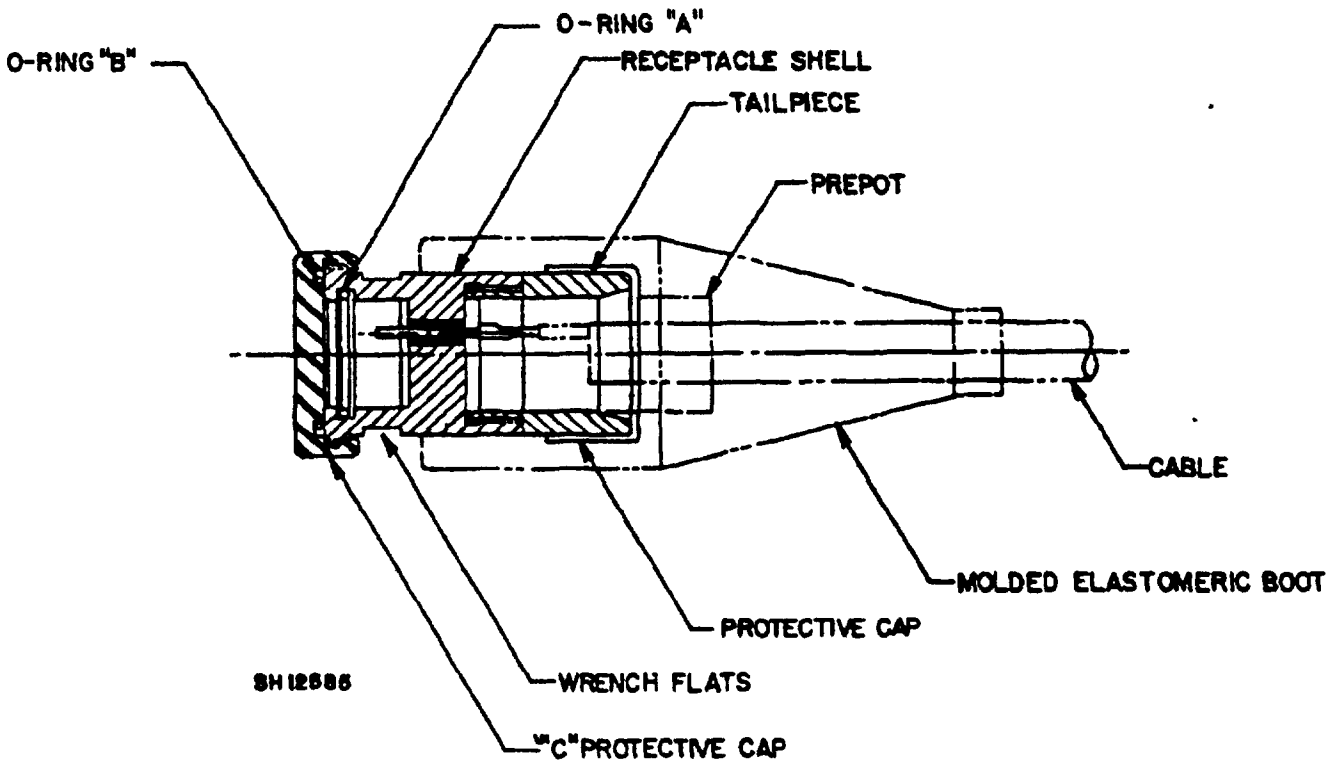


FIGURE 1. Configuration of receptacle assembly.


FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:03Z
Check the source to verify that this is the current version before use.

TABLE I. Parts description.

RECEPTACLE ASSY NO.	RECEPTACLE SHELL NO.	NO. OF CONTACTS & PIN SIZE	TAILPIECE NO.	A O- RING	B O- RING	C PROTECTIVE CAP
M24217/3-001	M24217/3-025	3 NO. 16	M24217/3-050	AS 568A-114	AS 568A-117	M24217/1-040
M24217/3- 002	M24217/3- 026	5 NO. 16	M24217/3- 051	AS 568A-117	AS 568A-121	M24217/1-041
M24217/3- 003	M24217/3-027	9 NO. 16	M24217/3-052	AS 568A-121	AS 568A-125	M24217/1-042
M24217/3-004	M24217/3- 028	14 NO. 16	M24217/3- 053	AS 568A-125	AS 568A-129	M24217/1-043
M24217/3-005	M24217/3-029	24 NO. 16	M24217/3- 054	AS 568A-131	AS 568A-134	M24217/1-044
M24217/3- 006	M24217/3-030	37 NO 16	M24217/3-055	AS 568A-137	AS 568A-140	M24217/1-045
M24217/3- 007	M24217/3- 031	48 NO 16	M24217/3-056	AS 568A-144	AS 568A-148	M24217/1-046
M24217/3- 008	M24217/3-032	3 NO. 12	M24217/3- 057	AS 568A-121	AS 568A-125	M24217/1-047
M24217/3- 009	M24217/3-033	5 NO 12	M24217/3-058	AS 568A-125	AS 568A-129	M24217/1-048
M24217/3- 010	M24217/3- 034	9 NO. 12	M24217/3- 059	AS 568A-131	AS 568A-134	M24217/1-049
M24217/3- 011	M24217/3- 035	3 NO 8	M24217/3-058	AS 568A-125	AS 568A-129	M24217/1-048
M24217/3-012	M24217/3- 036	3 NO. 4	M24217/3-059	AS 568A-131	AS 568A-134	M24217/1-049
M24217/3- 013	M24217/3-037	3 NO. 12 3 NO. 8	M24217/3-059	AS 568A-131	AS 568A-134	M24217/1-049
M24217/3- 014	M24217/3-038	2 NO. 0 4 NO. 12	M24217/3- 060	AS 568A-137	AS 568A-140	M24217/1-050

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:03Z
Check the source to verify that this is the current version before use.

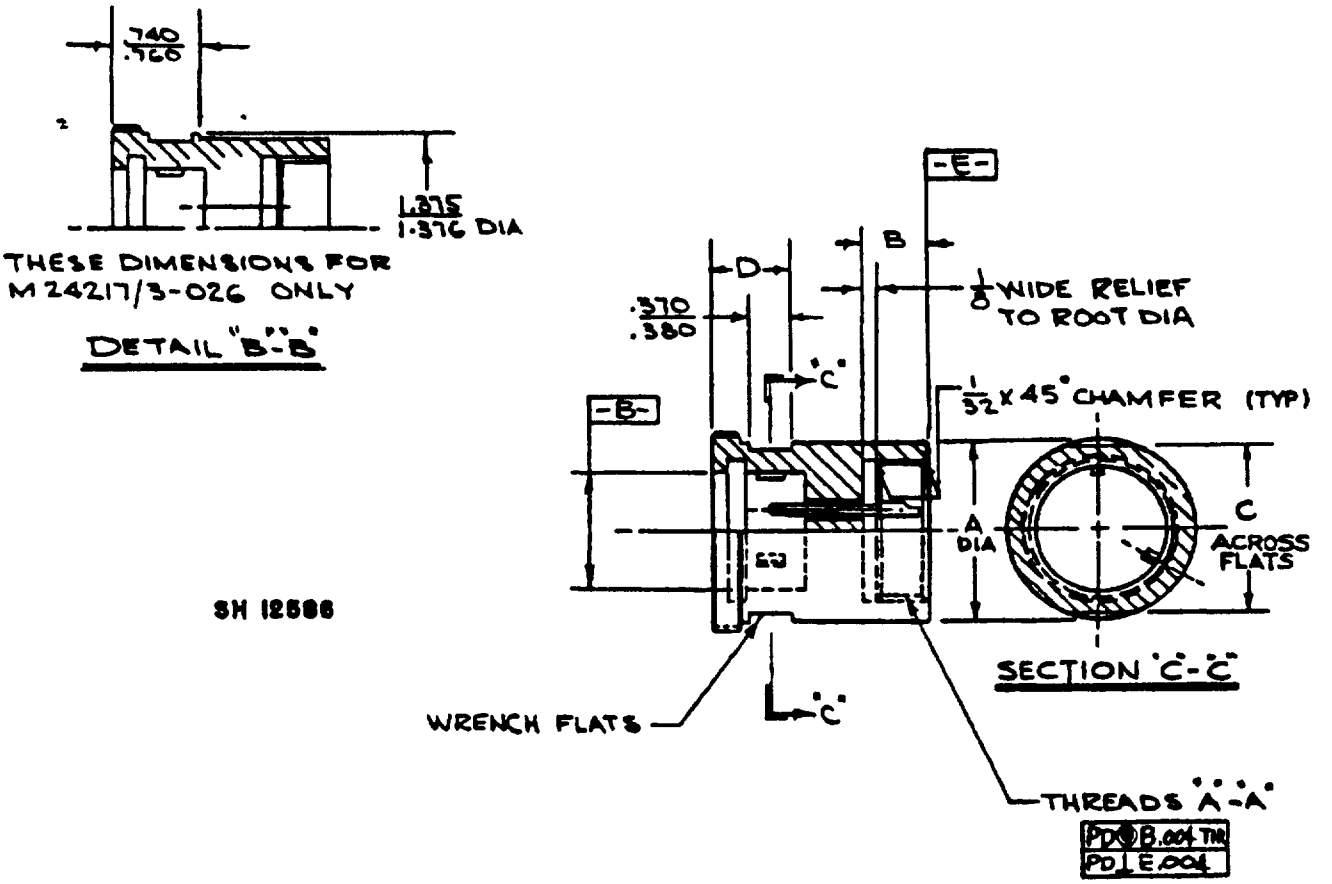

NOTE: For all other dimensions, requirements, parts and contact arrangements see MIL-C-24217/1.

FIGURE 2. Receptacle shell (in line type).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:03Z
Check the source to verify that this is the current version before use.

TABLE II. Dimensions.

RECEPTACLE SHELL NO.	NO. & SIZE CONTACTS	A*	B	C	D	THREADS "A"-"A"
M24217/3-025	3 NO.16	1.062 / 1.060	.560 / .570	.925 / .935	.740 / .760	$\frac{7}{8}$-16UN-2B
M24217/3-026	5 NO.16	1.187 / 1.185	.560 / .570	1.240 / 1.250	.696 / .675	$1\frac{1}{16}$-16UN-2B ← SEE DETAIL "B-B"
M24217/3-027	9 NO.16	1.502 / 1.500	.560 / .570	1.375 / 1.365	.740 / .760	$1\frac{5}{16}$-16UN-2B
M24217/3-028	14 NO.16	1.875 / 1.873	.560 / .570	1.740 / 1.750	.740 / .760	$1\frac{5}{8}$-16UN-2B
M24217/3-029	24 NO.16	2.315 / 2.313	.560 / .570	2.208 / 2.218	.740 / .760	2-16UN-2B
M24217/3-030	37 NO.16	2.812 / 2.810	.560 / .570	2.615 / 2.625	.740 / .760	$2\frac{1}{2}$-16UN-2B
M24217/3-031	48 NO.16	3.625 / 3.623	.560 / .570	3.490 / 3.500	1.000 / 1.020	$3\frac{1}{4}$-16UN-2B
M24217/3-032	3 NO.12	1.502 / 1.500	.870 / .880	1.365 / 1.375	1.180 / 1.200	$1\frac{5}{16}$-16UN-2B
M24217/3-033	5 NO.12	1.875 / 1.873	.870 / .880	1.740 / 1.750	1.180 / 1.200	$1\frac{5}{8}$-16UN-2B
M24217/3-034	9 NO.12	2.250 / 2.248	.870 / .880	2.115 / 2.125	1.180 / 1.200	2-16UN-2B
M24217/3-035	3 NO. 8	1.875 / 1.873	.870 / .880	1.740 / 1.750	1.180 / 1.200	$1\frac{5}{8}$-16UN-2B
M24217/3-036	5 NO. 4	2.250 / 2.248	.870 / .880	2.115 / 2.125	1.180 / 1.200	2-16UN-2B
M24217/3-037	3 NO. 8 3 NO. 12	2.250 / 2.248	.870 / .880	2.115 / 2.125	1.180 / 1.200	2-16UN-2B
M24217/3-038	2 NO 0 4 NO 12	2.750 / 2.748	.870 / .880	2.615 / 2.625	1.180 / 1.200	$2\frac{1}{2}$-16UN-2B

* SEE REQUIREMENT 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:03Z
Check the source to verify that this is the current version before use.

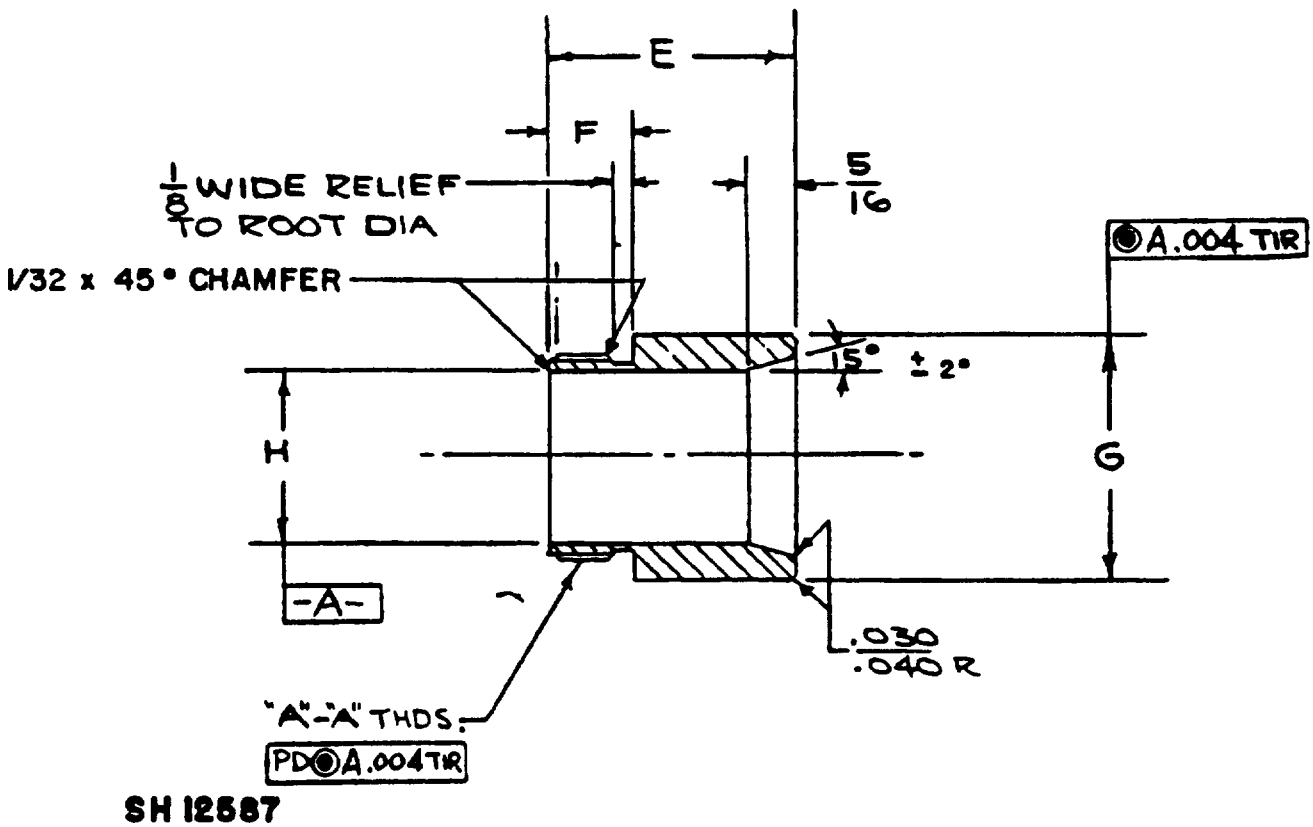


FIGURE 3. Tailpiece.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:03Z
Check the source to verify that this is the current version before use.

TABLE III. Dimensions.

TAILPIECE NO.	NO. & SIZE OF CONTACTS	E	F	G	H	THREADS "A"-"A"
M24217/3-050	3 NO.16	1.200 / 1.220	.575 / .585	1.067 / 1.057	.670 / .680	7/8-16UN-2A
M24217/3-051	5 NO.16	1.440 / 1.460	.575 / .585	1.192 / 1.182	.870 / .880	1 1/16-16UN-2A
M24217/3-052	9 NO.16	1.565 / 1.585	.575 / .585	1.505 / 1.495	1.120 / 1.130	1 5/16-16UN-2A
M24217/3-053	14 NO.16	1.627 / 1.647	.575 / .585	1.880 / 1.870	1.360 / 1.370	1 5/8-16UN-2A
M24217/3-054	24 NO.16	1.875 / 1.895	.575 / .585	2.317 / 2.307	1.750 / 1.760	2-16UN-2A
M24217/3-055	37 NO.16	2.807 / 2.827	.575 / .585	2.817 / 2.807	1.990 / 2.000	2 1/2-16UN-2A
M24217/3-056	48 NO.16	2.490 / 2.510	.575 / .585	3.630 / 3.620	2.520 / 2.530	3 1/4-16UN-2A
M24217/3-057	3 NO.12	1.565 / 1.585	.885 / .895	1.505 / 1.495	1.120 / 1.130	1 5/16-16UN-2A
M24217/3-058	5 NO.12 3 NO.8	1.565 / 1.585	.885 / .895	1.880 / 1.870	1.360 / 1.370	1 5/8-16UN-2A
M24217/3-059	2 NO.12 5 NO.4 3 NO.12 3 NO.8	1.875 / 1.895	.885 / .895	2.255 / 2.245	1.750 / 1.760	2-16UN-2A
M24217/3-060	2 NO.0 4 NO.12	2.125 / 2.105	.885 / .895	2.755 / 2.745	1.990 / 2.000	2 1/2-16UN-2A

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:03Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Dimensions and configuration: See figures and tables.
2. Dimensions shown in receptacle shell "A" column are applicable for that portion of the shell that fits into the mold cavity. Dimensions on the remaining "A" diameter area may be increased or decreased by 0.004 inch as applicable.
3. Contact gasket (face seal) may be molded and secured to the receptacle web with adhesive or poured in place using a clear RTV silicone, General Electric RTV 615 with General Electric SS-4120 primer or equal. Either method shall prevent the entrance of water under the seal.
4. Material certification in accordance with MIL-C-24217 is not a requirement for the in line receptacle shell.
5. The material for the tailpiece shall be corrosion-resistant steel, class 316 or 316L in accordance with QQ-S-760, and shall be passivated.
6. Alternate material for the receptacle shell is corrosion-resistant steel, class 316 in accordance with QQ-S-763, and shall be passivated.
7. In line receptacle assemblies shall be packaged as shown in the assembly view (protective cover tightened to compress the O-ring) except that the interior O-ring (O-ring "A") shall be separately packaged.

Preparing activity:
Navy - SH
(Project 5935-N246-3)

☆U S GOVERNMENT PRINTING OFFICE: 1984—705-040/A4455

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:03Z
Check the source to verify that this is the current version before use.