MILITARY SPECIFICATION SHEET

RECEPTACLE ASSEMBLY (MID-FLANGED BOLTED TYPE)

This specification sheet is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the receptacle assembly described herein shall consist of this document and the latest issue of MIL-C-24217.

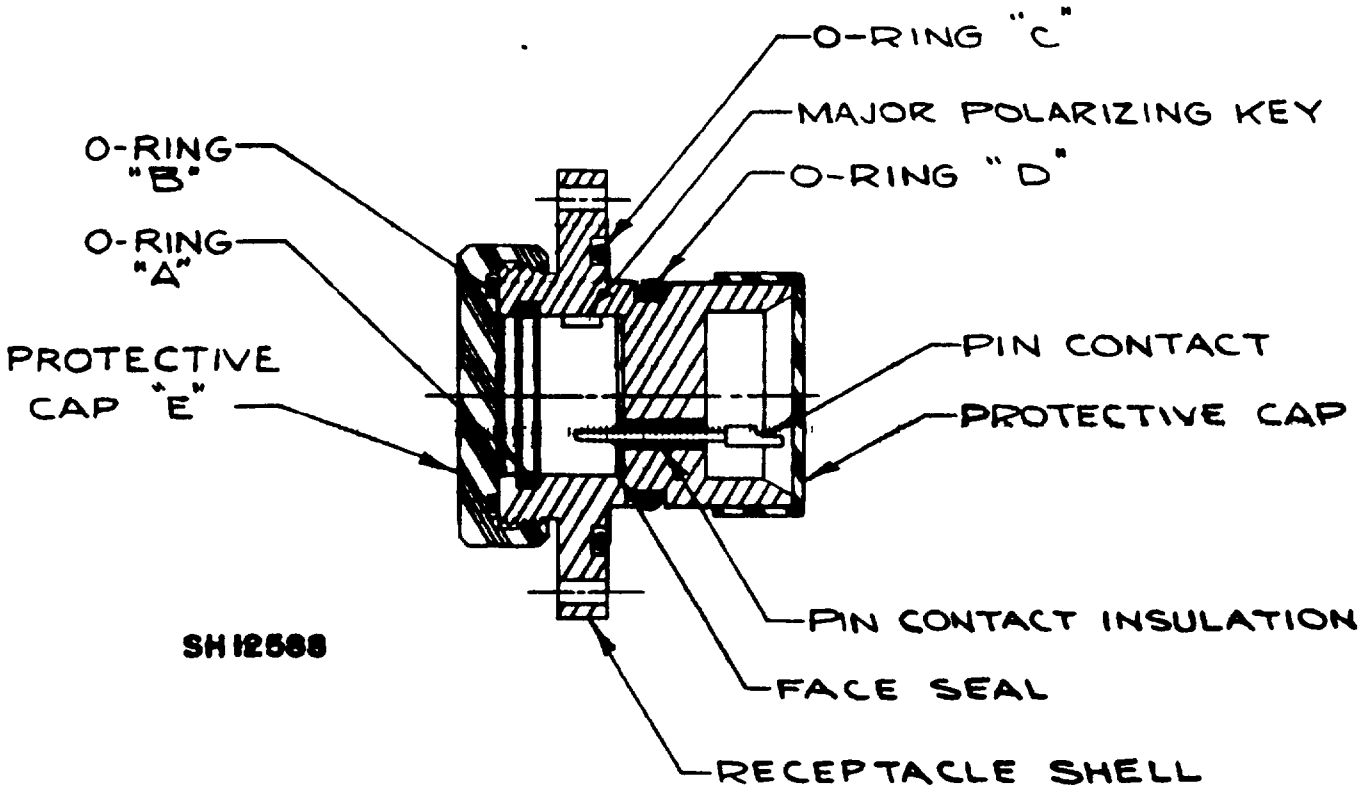


FIGURE 1. Configuration of receptacle assembly.


FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:03Z
Check the source to verify that this is the current version before use.

TABLE I. Parts description.

RECEPTACLE ASSY PART NO	NO OF CONTACTS AND PIN SIZE	RECEPTACLE SHELL PART NO.	PROTECTIVE CAP "E" PART NO.	O-RING SIZE AS-568A			
				A	B	C	D
M24217/4-001	3 NO. 16	M24217/4-025	M24217/1-040	114	117	220	212
M24217/4-002	5 NO 16	M24217/4-026	M24217/1-041	117	121	223	216
M24217/4-003	9 NO. 16	M24217/4-027	M24217/1-042	121	125	224	218
M24217/4-004	14 NO. 16	M24217/4-028	M24217/1-043	125	129	227	223
M24217/4-005	24 NO. 16	M24217/4-029	M24217/1-044	131	134	230	226
M24217/4-006	37 NO. 16	M24217/4-030	M24217/1-045	137	140	234	230
M24217/4-007	48 NO. 16	M24217/4-031	M24217/1-046	144	148	240	236
M24217/4-008	3 NO. 12	M24217/4-032	M24217/1-047	121	125	224	218
M24217/4-009	5 NO. 12	M24217/4-033	M24217/1-048	125	129	227	223
M24217/4-010	9 NO. 12	M24217/4-034	M24217/1-049	131	134	230	226
M24217/4-011	3 NO. 8	M24217/4-035	M24217/1-048	125	129	227	223
M24217/4-012	3 NO. 4	M24217/4-036	M24217/1-049	131	134	230	226
M24217/4-013	3 NO. 12 3 NO. 8	M24217/4-037	M24217/1-049	131	134	230	226
M24217/4-014	2 NO. 0 4 NO. 12	M24217/4-038	M24217/1-050	137	140	234	230

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:03Z
Check the source to verify that this is the current version before use.

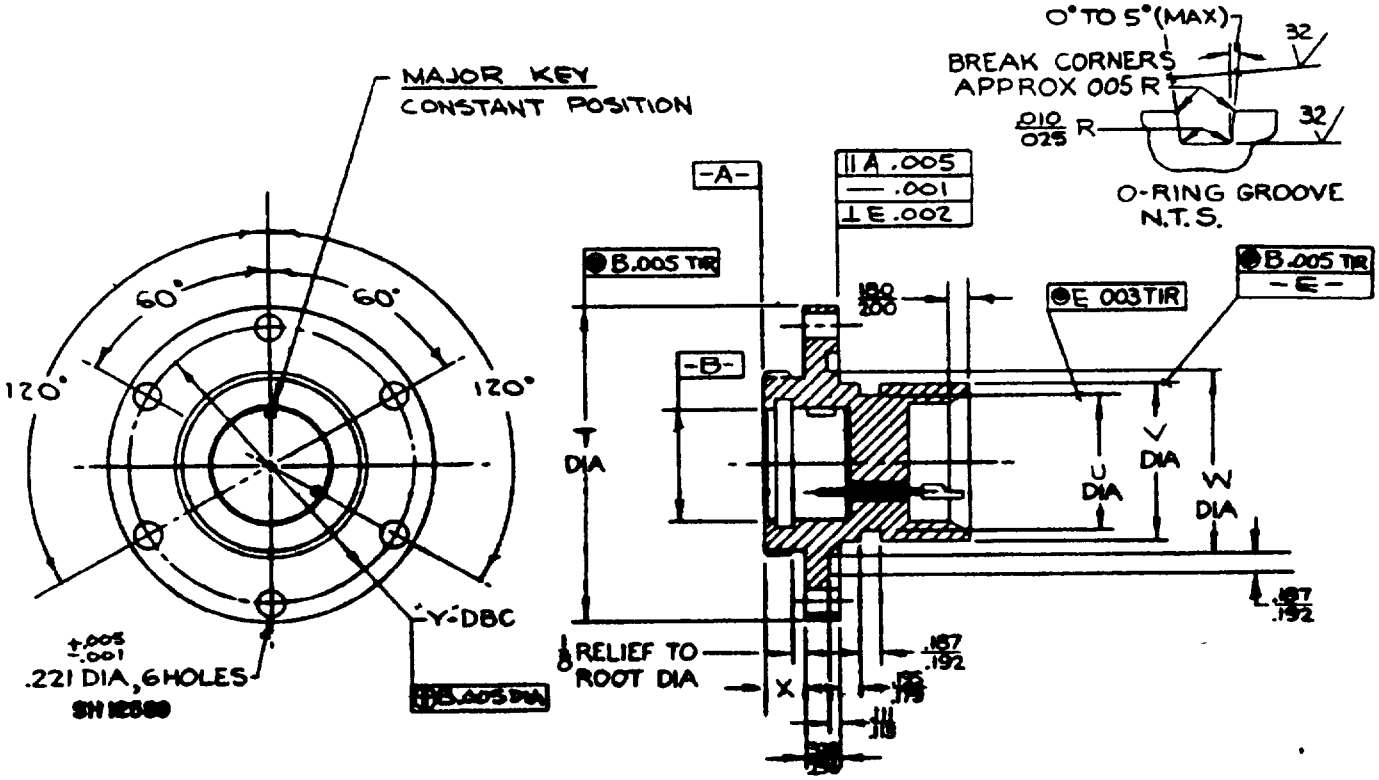

NOTE: For all other dimensions, requirements, parts and contact arrangements see MIL-C-24217/1.


FIGURE 2. Receptacle shell (mid-flanged bolted type).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:03Z
Check the source to verify that this is the current version before use.

TABLE II. Dimensions.

PART NO.	NO. OF CONTACTS AND PIN SIZE	T	U	V	W	X	Y
M24217/4-025	3 NO. 16	2 1/2	.903 / .899	1.122 / 1.118	1.375 / 1.370	.370 / .380	2 1/8
M24217/4-026	5 NO. 16	2 3/4	1.153 / 1.149	1.372 / 1.368	1.625 / 1.620	.370 / .380	2 3/8
M24217/4-027	9 NO. 16	3	1.278 / 1.274	1.497 / 1.493	1.750 / 1.745	.370 / .380	2 5/8
M24217/4-028	14 NO. 16	3 3/8	1.653 / 1.649	1.872 / 1.868	2.130 / 2.125	.370 / .380	3
M24217/4-029	24 NO. 16	3 3/4	2.028 / 2.024	2.247 / 2.243	2.510 / 2.505	.370 / .380	3 3/8
M24217/4-030	37 NO. 16	4 7/16	2.528 / 2.524	2.747 / 2.743	3.015 / 3.010	.370 / .380	4 1/16
M24217/4-031	48 NO. 16	5	3.278 / 3.274	3.495 / 3.491	3.770 / 3.765	.552 / .562	4 5/8
M24217/4-032	3 NO. 12	3	1.278 / 1.274	1.497 / 1.493	1.750 / 1.745	.870 / .880	2 5/8
M24217/4-033	5 NO. 12	3 3/8	1.653 / 1.649	1.872 / 1.868	2.130 / 2.125	.870 / .880	3
M24217/4-034	9 NO 12	3 3/4	2.028 / 2.024	2.247 / 2.243	2.510 / 2.505	.870 / .880	3 3/8
M24217/4-035	3 NO. 8	3 3/8	1.653 / 1.649	1.872 / 1.868	2.130 / 2.125	.870 / .880	3
M24217/4-036	3 NO. 4	3 3/4	2.028 / 2.024	2.247 / 2.243	2.510 / 2.505	.870 / .880	3 3/8
M24217/4-037	3 NO. 12 3 NO. 8	3 3/4	2.028 / 2.024	2.247 / 2.243	2.510 / 2.505	.870 / .880	3 3/8
M24217/4-038	2 NO. 0 4 NO. 12	4 7/16	2.528 / 2.524	2.747 / 2.743	3.015 / 3.010	.870 / .880	4 1/16

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:03Z
Check the source to verify that this is the current version before use.

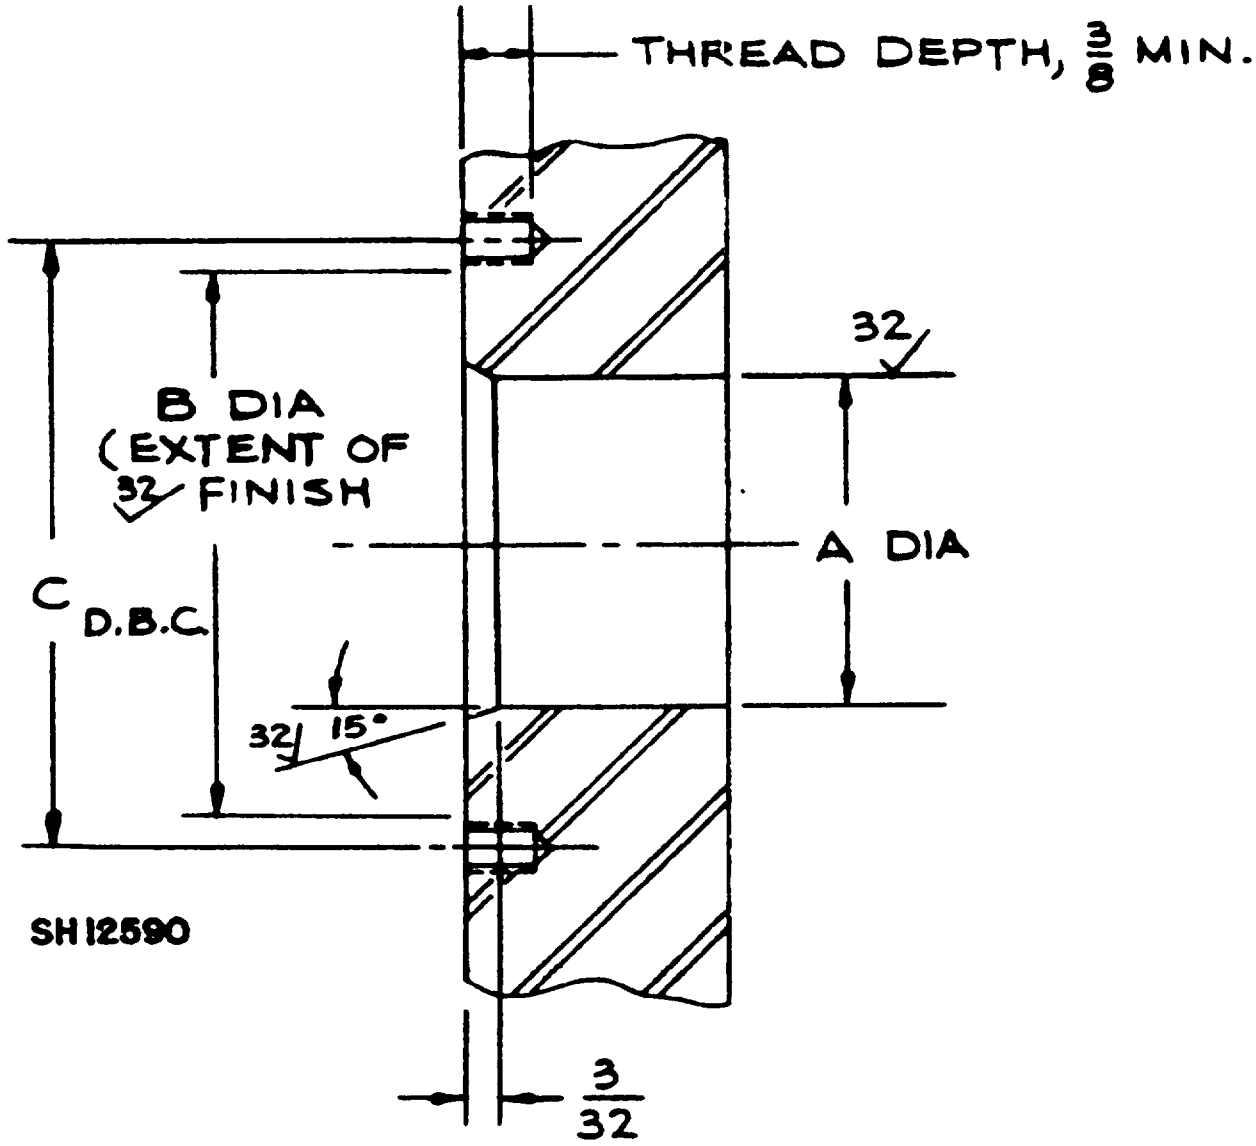

NOTE: Bulkhead opening details are furnished for information purposes only. It is the responsibility of the installing activity to ensure that adequate hole compensation is provided in structural bulkheads (see requirement 5).

FIGURE 3. Bulkhead opening detail.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:03Z
Check the source to verify that this is the current version before use.

TABLE III. Bulkhead opening dimensions.

RECEPTACLE PART NO.	NO. OF CONTACTS & PIN SIZE	A DIA	B DIA	C D.B.C.
M24217/4-025	3 NO. 16	1.125 / 1.127	1 7/8	2 1/8
M24217/4-026	5 NO. 16	1.375 / 1.377	2 1/8	2 3/8
M24217/4-027 M24217/4-032	9 NO. 16 3 NO. 12	1.500 / 1.502	2 3/8	2 5/8
M24217/4-028 M24217/4-033 M24217/4-035	14 NO. 16 5 NO. 12 3 NO. 8	1.875 / 1.877	2 3/4	3
M24217/4-029 M24217/4-034 M24217/4-036 M24217/4-037	24 NO. 16 9 NO. 12 3 NO. 4 3 NO.12 W 3 NO.8	2.250 / 2.252	3 1/8	3 3/8
M24217/4-030 M24217/4-038	37 NO. 16 2 NO.0 W 4 NO.12	2.750 / 2.752	3 13/16	4 1/16
M24217/4-031	48 NO. 16	3.500 / 3.502	4 3/8	4 5/8

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:03Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Dimensions and configuration: See figures and tables.
2. Contact gasket (face seal) may be molded and secured to the receptacle web with adhesive or poured in place using a clear RTV silicone, General Electric RTV 615 with General Electric SS-4120 primer or equal. Either method shall prevent the entrance of water under the seal.
3. Receptacle assemblies shall be packaged as shown in the assembly view (protective cover tightened to compress the O-ring), except that the interior, flange, and body O-rings ("A", "C" and "D" O-rings) shall be separately packaged.
4. Receptacle attachment bolts are the responsibility of the installing activity.

Preparing activity:
Navy - SH
(Project 5935-N246-4)

☆U S GOVERNMENT PRINTING OFFICE 1984—705-040/A4541

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:03Z
Check the source to verify that this is the current version before use.