MILITARY SPECIFICATION SHEET

RECEPTACLE ASSEMBLY (LOCKNUT FLANGE TYPE)

This specification sheet is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the receptacle assembly described herein shall consist of this document and the latest issue of MIL-C-24217.

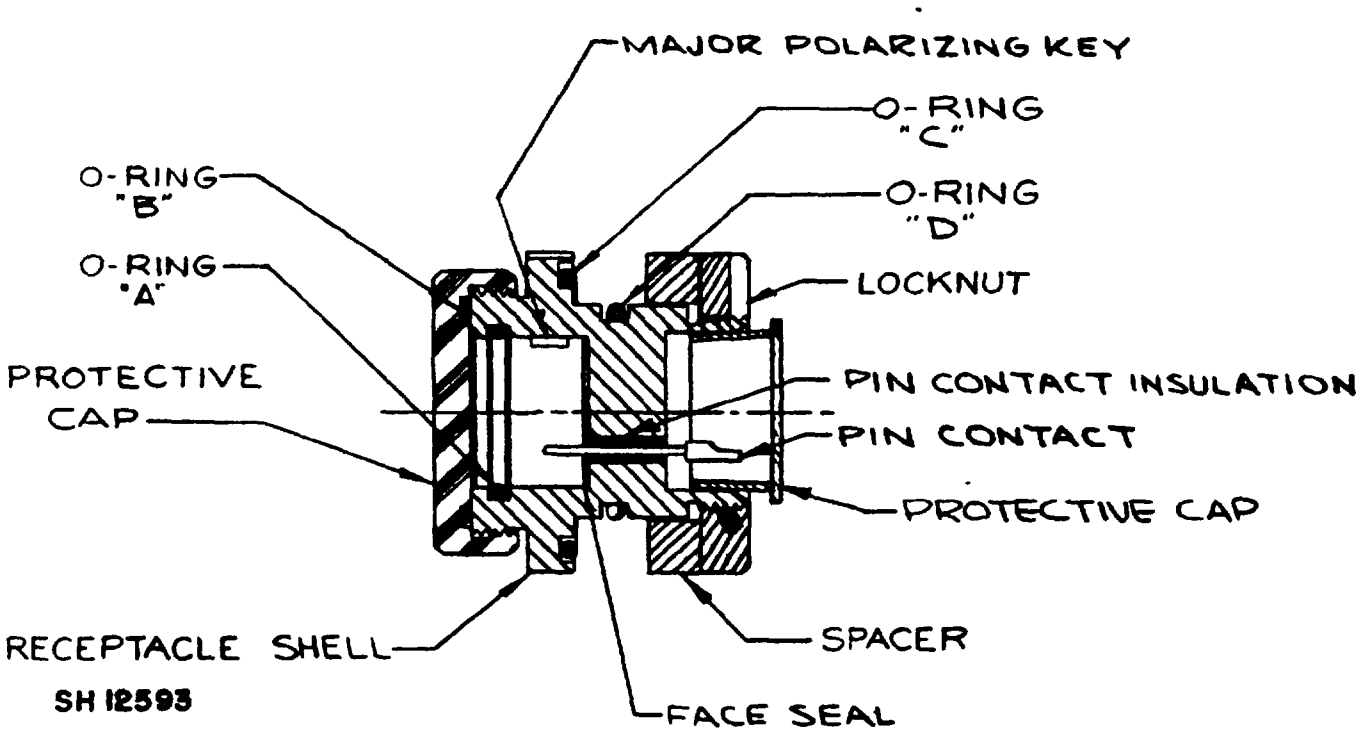


FIGURE 1. Configuration of receptacle assembly.

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:03Z
Check the source to verify that this is the current version before use.


TABLE I. Parts description.

RECEPTACLE ASSY PART NO	NO. OF CONTACTS AND PIN SIZE	RECEPTACLE SHELL PART NO.	PROTECTIVE CAP PART NO.	LOCKNUT PART NO.	SPACER PART NO	O-RING SIZE ARP 568-				SPANNER WRENCH PART NO.
						A	B	C	D	
M24217/6-001	3 NO. 16	M24217/6-025	M24217/1-040	M24217/6-039	M24217/6-050	114	117	220	212	M24217/6-057
M24217/6-002	5 NO. 16	M24217/6-026	M24217/1-041	M24217/6-040	M24217/6-051	117	121	223	216	M24217/6-058
M24217/6-003	9 NO. 16	M24217/6-027	M24217/1-042	M24217/6-041	M24217/6-052	121	125	224	218	M24217/6-059
M24217/6-004	14 NO. 16	M24217/6-028	M24217/1-043	M24217/6-042	M24217/6-053	125	129	227	223	M24217/6-060
M24217/6-005	24 NO. 16	M24217/6-029	M24217/1-044	M24217/6-043	M24217/6-054	131	134	230	226	M24217/6-061
M24217/6-006	37 NO 16	M24217/6-030	M24217/1-045	M24217/6-044	M24217/6-055	137	140	234	230	M24217/6-062
M24217/6-007	48 NO 16	M24217/6-031	M24217/1-046	M24217/6-045	M24217/6-056	144	148	240	236	M24217/6-063
M24217/6-008	3 NO 12	M24217/6-032	M24217/1-047	M24217/6-046	M24217/6-052	121	125	224	218	M24217/6-059
M24217/6-009	5 NO 12	M24217/6-033	M24217/1-048	M24217/6-047	M24217/6-053	125	129	227	223	M24217/6-060
M24217/6-010	9 NO 12	M24217/6-034	M24217/1-049	M24217/6-048	M24217/6-054	131	134	230	226	M24217/6-061
M24217/6-011	3 NO. 8	M24217/6-035	M24217/1-048	M24217/6-047	M24217/6-053	125	129	227	223	M24217/6-060
M24217/6-012	3 NO. 4	M24217/6-036	M24217/1-049	M24217/6-048	M24217/6-054	131	134	230	226	M24217/6-061
M24217/6-013	3 NO. 12 3 NO. 8	M24217/6-037	M24217/1-049	M24217/6-048	M24217/6-054	131	134	230	226	M24217/6-061
M24217/6-014	2 NO. 0 4 NO 12	M24217/6-038	M24217/1-050	M24217/6-049	M24217/6-055	137	140	234	230	M24217/6-062
M24217/6-015	8 NO 16	M24217/6-070	M24217/6-067	M24217/6-066	M24217/6-065	117	119	220	214	M24217/6-064

1/

1/ SEE REQUIREMENT 9

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:03Z
Check the source to verify that this is the current version before use.

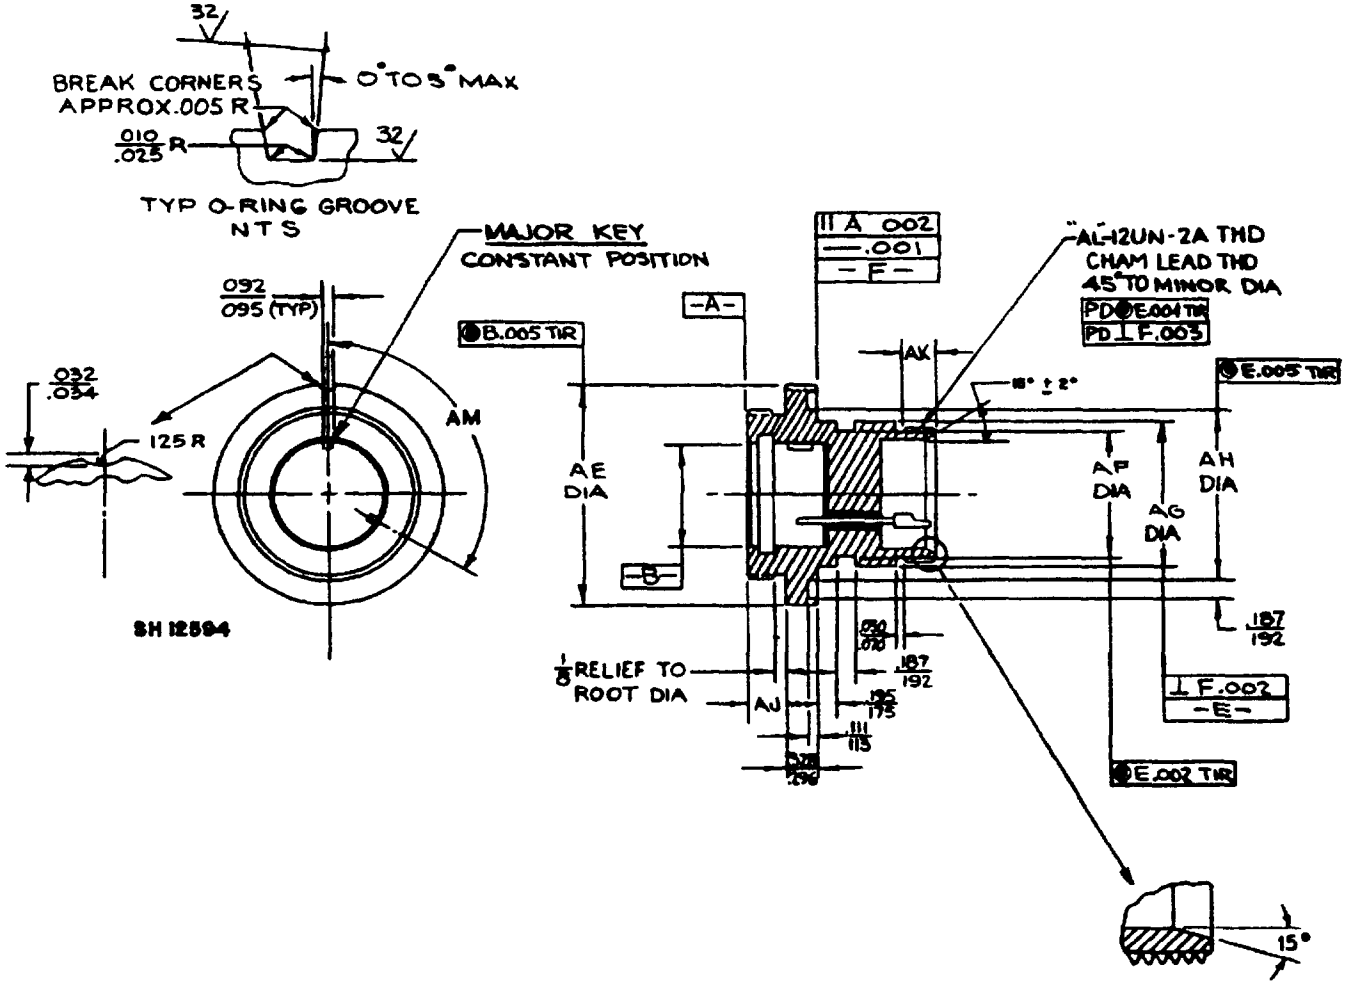

NOTE: For all other dimensions, requirements, parts and contact arrangements see MIL-C-24217/1.


FIGURE 2. Receptacle shell (locknut flange type).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:03Z
Check the source to verify that this is the current version before use.

TABLE II. Dimensions.


PART NO.	NO. OF CONTACTS AND PIN SIZE	AE	AF	AG	AH	AJ	AK	AL	AM
M24217/6-025	3 NO. 16	1 7/8	.903 / .899	1.122 / 1.118	1.375 / 1.370	.370 / .380	.355 / .335	1"	.120°
M24217/6-026	5 NO. 16	2 1/8	1.153 / 1.149	1.372 / 1.368	1.625 / 1.620	.370 / .380	.355 / .335	1 1/4	.120°
M24217/6-027	9 NO. 16	2 1/4	1.278 / 1.274	1.497 / 1.493	1.750 / 1.745	.370 / .380	.355 / .335	1 3/8	.120°
M24217/6-028	14 NO. 16	2 5/8	1.653 / 1.649	1.872 / 1.868	2.130 / 2.125	.370 / .380	.355 / .335	1 3/4	.120°
M24217/6-029	24 NO. 16	3 1/8	2.028 / 2.024	2.247 / 2.243	2.510 / 2.505	.370 / .380	.355 / .335	2 1/8	.120°
M24217/6-030	37 NO. 16	3 5/8	2.528 / 2.524	2.747 / 2.743	3.015 / 3.010	.370 / .380	.355 / .335	2 5/8	.120°
M24217/6-031	48 NO 16	4 3/8	3.278 / 3.274	3.495 / 3.491	3.770 / 3.765	.562 / .562	.355 / .335	3 3/8	.120°
M24217/6-032	3 NO. 12	2 1/4	1.278 / 1.274	1.497 / 1.493	1.750 / 1.745	.870 / .880	.520 / .500	1 3/8	.120°
M24217/6-033	5 NO 12	2 5/8	1.653 / 1.649	1.872 / 1.868	2.130 / 2.125	.870 / .880	.520 / .500	1 3/4	.165°
M24217/6-034	9 NO. 12	3 1/8	2.028 / 2.024	2.247 / 2.243	2 510 / 2.505	.870 / .880	.520 / .500	2 1/8	.120°
M24217/6-035	3 NO. 8	2 5/8	1.653 / 1.649	1.872 / 1.868	2.130 / 2.125	.870 / .880	.520 / .500	1 3/4	.120°
M24217/6-036	3 NO. 4	3 1/8	2.028 / 2.024	2.247 / 2.243	2.510 / 2.505	.870 / .880	.520 / .500	2 1/8	.120°
M24217/6-037	3 NO. 12 3 NO. 8	3 1/8	2.028 / 2.024	2.247 / 2.243	2.510 / 2.505	.870 / .880	.520 / .500	2 1/8	.120°
M24217/6-038	2 NO 0 4 NO. 12	3 5/8	2.528 / 2.524	2.747 / 2.743	3.015 / 3.010	.870 / .880	.520 / .500	2 5/8	.120°

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:03Z
Check the source to verify that this is the current version before use.

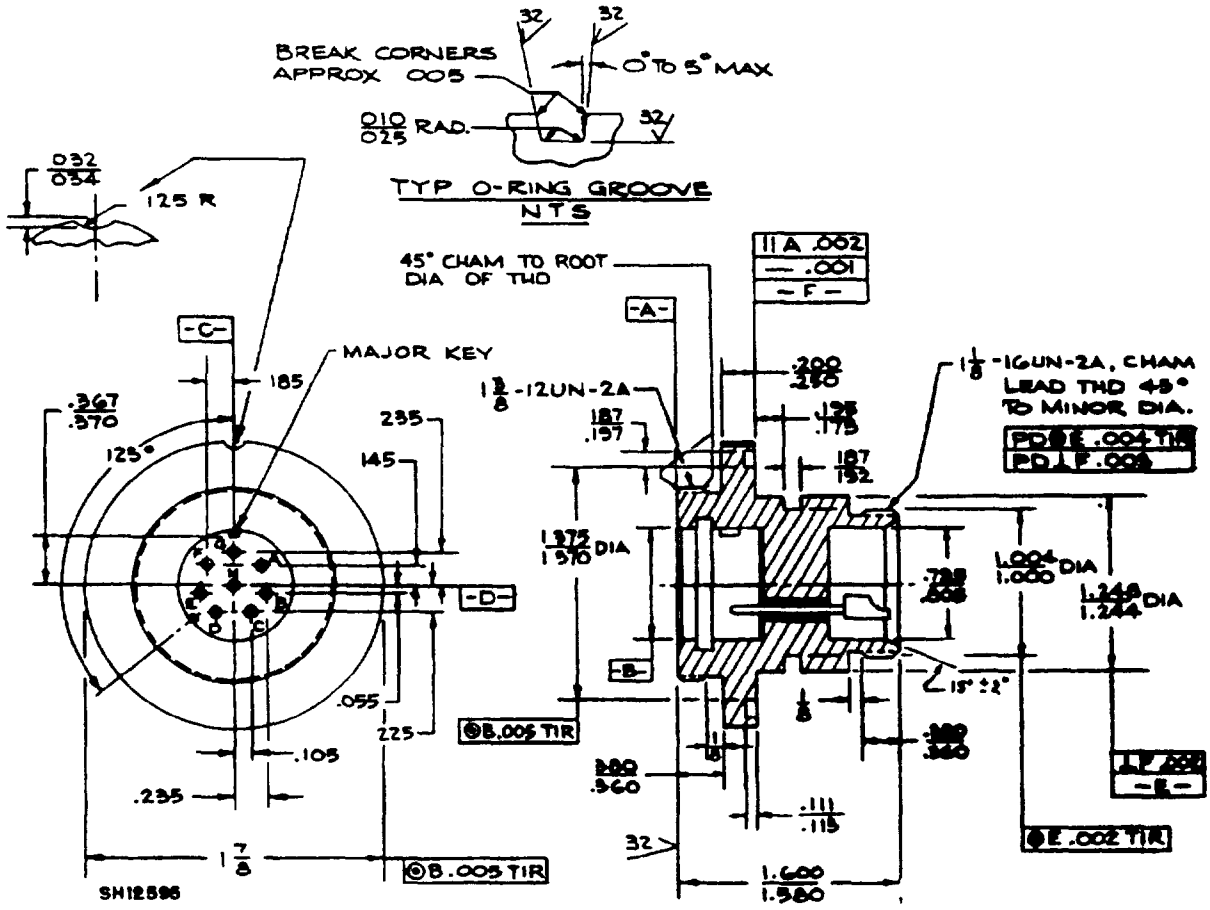

M24217/6-070

OTHER DIMENSIONS SAME AS M24217/1-026 (SEE REQUIREMENT 9)

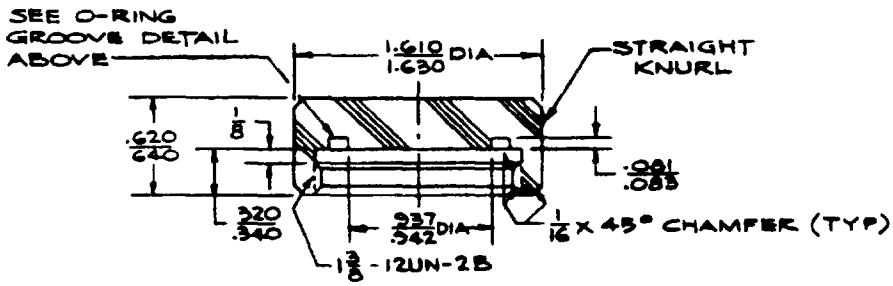

M24217/6-067

NOTES:

1. Datums -C- and -D- are vertical and horizontal centerlines of the receptacle bore diameter; their point of intersection having a true position within 0.003 diameter.
2. Pin contacts to be true position within 0.003 diameter to datums -C- and -D-.

FIGURE 3. Receptacle shell (locknut flange type).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:03Z
Check the source to verify that this is the current version before use.

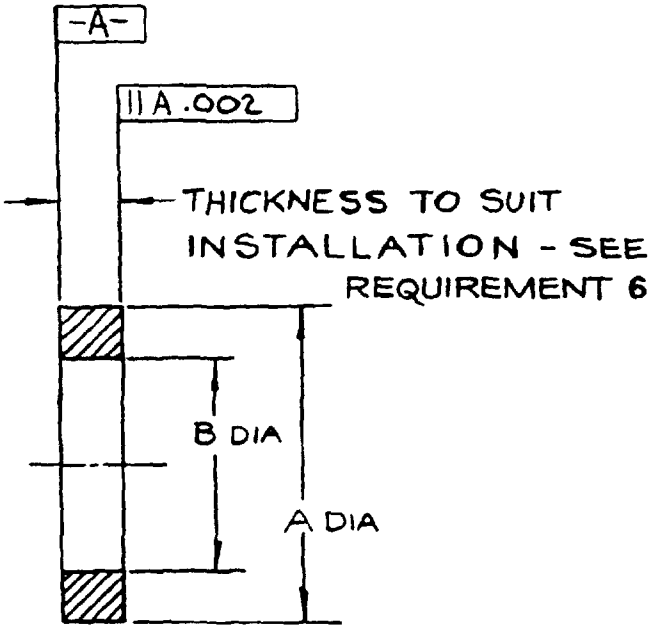


FIGURE 4. Spacer.

TABLE III. Dimensions.

PART NO.	A	B
M24217/6-050	$1\frac{7}{8}$	1.125 / 1.135
M24217/6-051	$2\frac{1}{8}$	1.375 / 1.385
M24217/6-052	$2\frac{1}{4}$	1.500 / 1.510
M24217/6-053	$2\frac{5}{8}$	1.875 / 1.885
M24217/6-054	$3\frac{1}{8}$	2.250 / 2.260
M24217/6-055	$3\frac{5}{8}$	2.750 / 2.760
M24217/6-056	$4\frac{3}{8}$	3.500 / 3.510
M24217/6-065	$1\frac{1}{2}$	1.300 / 1.320

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:03Z
Check the source to verify that this is the current version before use.

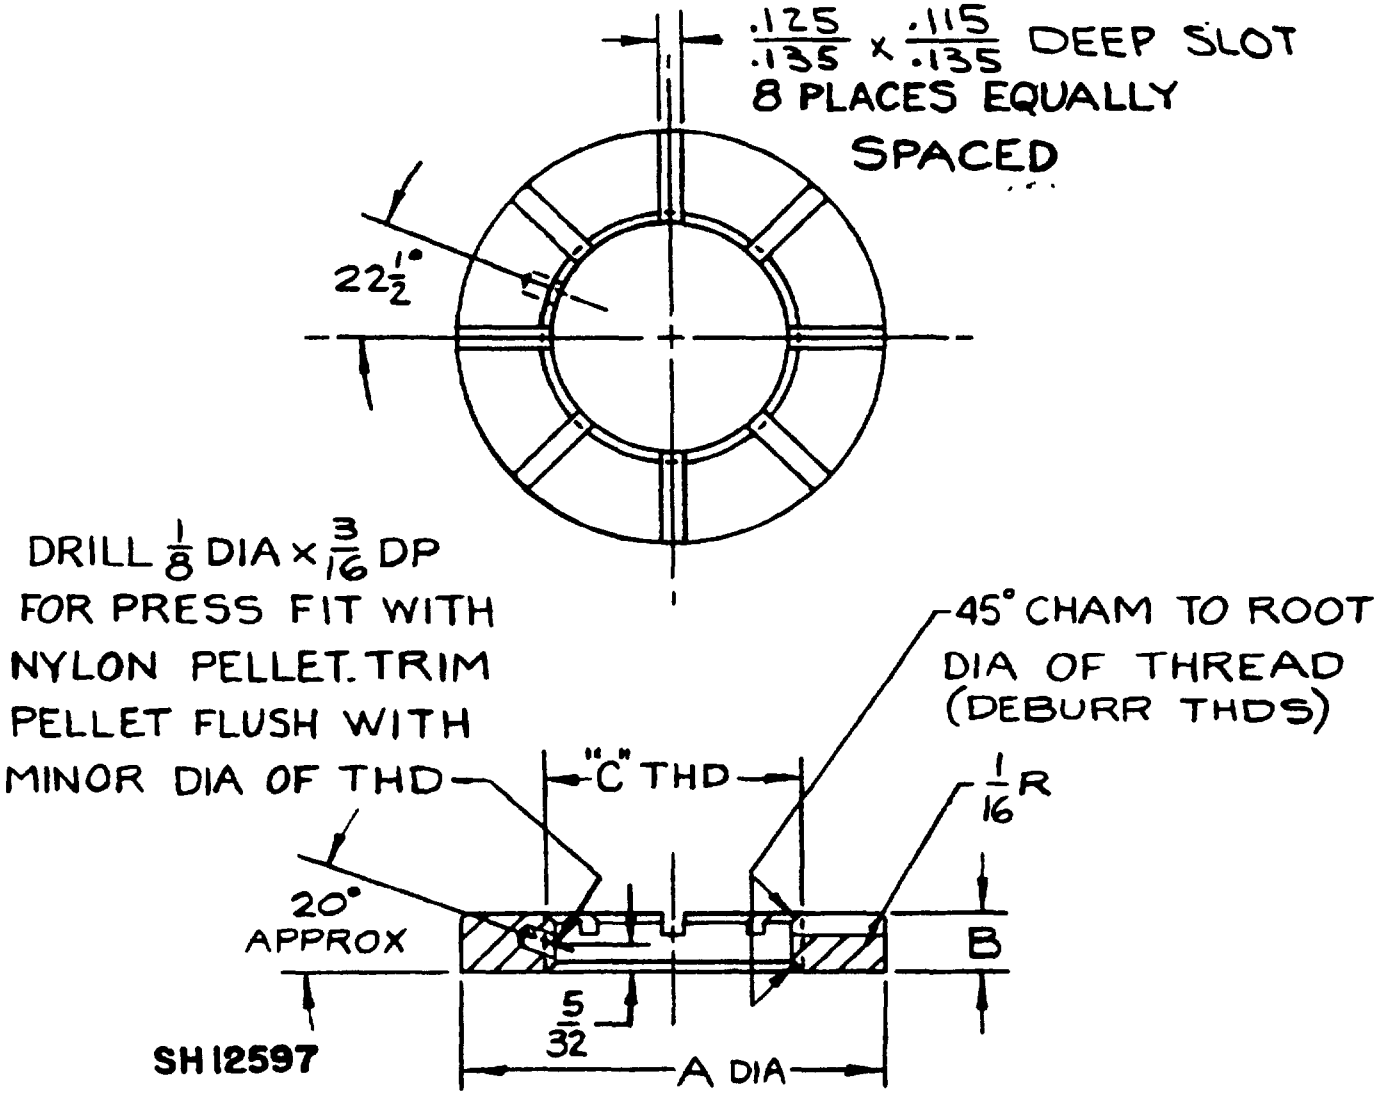



FIGURE 5. Locknut.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:03Z
Check the source to verify that this is the current version before use.

TABLE IV. Dimensions.

PART NO	A	B	"C" THD
M24217/6-039	1.880 / 1.870	21/64	1"-12UN-2B
M24217/6-040	2.130 / 2.120	21/64	1 1/4-12UN-2B
M24217/6-041	2.255 / 2.245	21/64	1 3/8-12UN-2B
M24217/6-042	2.630 / 2.620	21/64	1 3/4-12UN-2B
M24217/6-043	3.130 / 3.120	21/64	2 1/8-12UN-2B
M24217/6-044	3.630 / 3.620	21/64	2 5/8-12UN-2B
M24217/6-045	4.380 / 4.370	21/64	3 3/8-12UN-2B
M24217/6-046	2.255 / 2.245	33/64	1 3/8-12UN-2B
M24217/6-047	2.630 / 2.620	33/64	1 3/4-12UN-2B
M24217/6-048	3.130 / 3.120	33/64	2 1/8-12UN-2B
M24217/6-049	3.630 / 3.620	33/64	2 5/8-12UN-2B
M24217/6-066	1.500 / 1.490	21/64	1 1/8-16UN-2B

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:03Z
Check the source to verify that this is the current version before use.

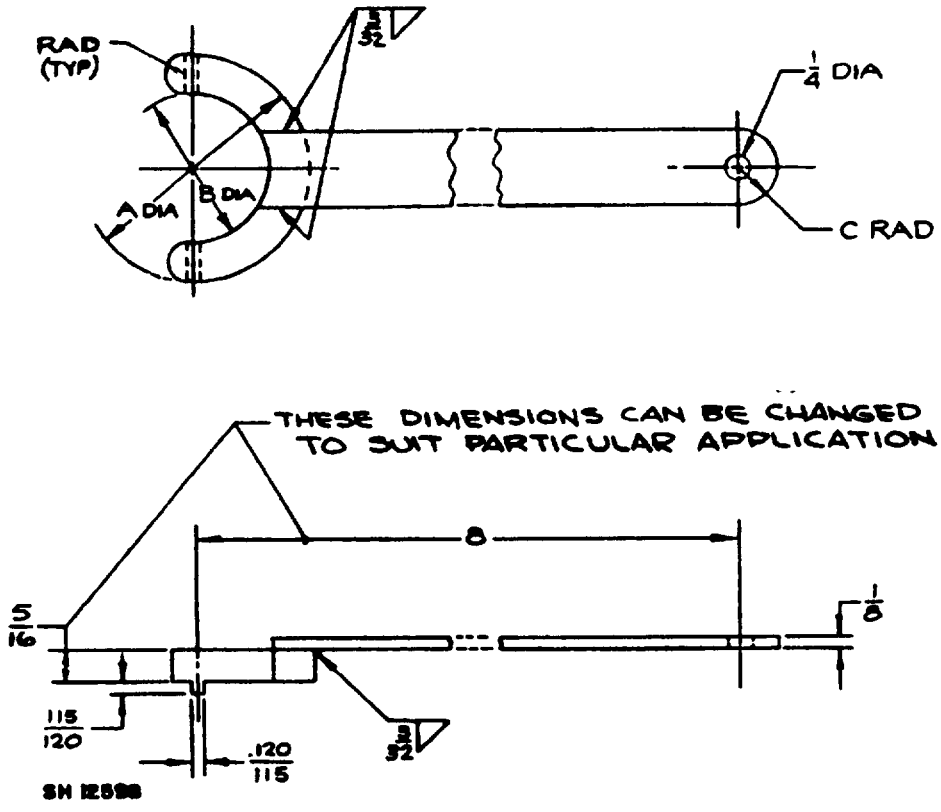


NOTE: Break all sharp edges.

FIGURE 6. Spanner wrench.

TABLE V. Dimensions.

PART NO.	A	B	C
M24217/6-057	1.870 / 1.840	1.500 / 1.510	3/8
M24217/6-058	1.900 / 1.870	1.500 / 1.510	3/8
M24217/6-059	2.245 / 2.215	1.939 / 1.949	3/8
M24217/6-060	2.620 / 2.590	2.328 / 2.338	3/8
M24217/6-061	3.120 / 3.090	2.626 / 2.636	1/2
M24217/6-062	3.500 / 3.470	3.068 / 3.078	1/2
M24217/6-063	4.370 / 4.340	3.826 / 3.836	1/2
M24217/6-064	1.625 / 1.595	1.250 / 1.260	3/8

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:03Z
Check the source to verify that this is the current version before use.

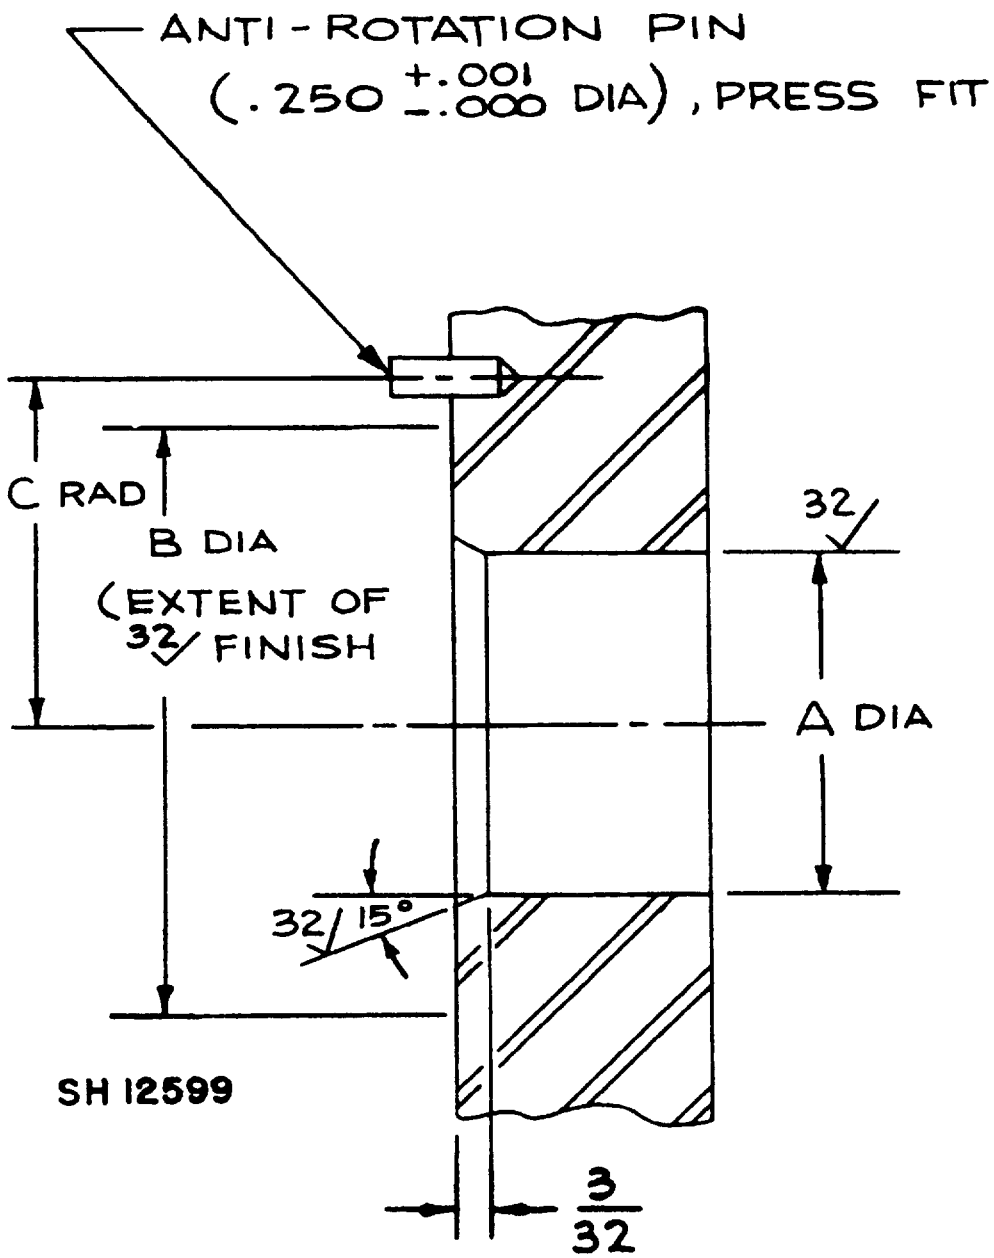

NOTE: Bulkhead opening details are furnished for information purposes only. It is the responsibility of the installing activity to ensure that adequate hole compensation is provided in structural bulkheads (see requirement 8).

FIGURE 7. Bulkhead opening detail.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:03Z
Check the source to verify that this is the current version before use.

TABLE VI. Bulkhead opening dimensions.

RECEPTACLE PART NO.	NO. OF CONTACTS & PIN SIZE	A DIA	B DIA	C RAD
M24217/6-025	3 NO. 16	1.125 / 1.127	2	1.038 / 1.041
M24217/6-026	5 NO. 16	1.375 / 1.377	2 1/4	1.163 / 1.166
M24217/6-027 M24217/6-032	9 NO. 16 3 NO. 12	1.500 / 1.502	2 3/8	1.226 / 1.229
M24217/6-028 M24217/6-033 M24217/6-035	14 NO. 16 5 NO. 12 3 NO. 8	1.875 / 1.877	2 3/4	1.413 / 1.416
M24217/6-029 M24217/6-034 M24217/6-036 M24217/6-037	24 NO. 16 9 NO. 12 3 NO. 4 3 NO.12 W 3 NO.8	2.250 / 2.252	3 1/4	1.663 / 1.666
M24217/6-030 M24217/6-038	37 NO. 16 2 NO.0 W 4 NO.12	2.750 / 2.752	3 3/4	1.913 / 1.916
M24217/6-031	48 NO. 16	3.500 / 3.502	4 1/2	2.288 / 2.291
M24217/6-070	8 NO. 16	1.250 / 1.252	2	1.038 / 1.041

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:03Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Dimensions and configuration: See figures and tables.
2. Contact gasket (face seal) may be molded and secured to the receptacle web with adhesive or poured in place using a clear RTV silicone, General Electric RTV 615 with General Electric SS-4120 primer or equal. Either method shall prevent the entrance of water under the seal.
3. The material for the locknut shall be nickel aluminum bronze in accordance with QQ-C-465, alloy no. 630.
4. The material for the spacer shall be corrosion-resistant steel in accordance with class 316 of QQ-S-763, and shall be passivated.
5. The material for the spanner wrench shall be cold rolled commercial steel. After all machining, clean, prime and paint with a good quality gray enamel.
6. Spacer thickness shall be specified in the contracting documents.
7. Receptacle assemblies shall be packaged as shown in the assembly view (protective cover tightened to compress the O-ring), except that the interior, flange and body O-rings ("A", "C" and "D" O-rings) shall be separately packaged.
8. Locknut type receptacle applications involving penetration of the pressure envelope or structural bulkheads on combat submarines shall have specific approval from NAVSEA.
9. Part number M24217/6-015 shall not be used for new design applications.

Preparing activity:
Navy - SH
(Project 5935-N246-6)

☆U S GOVERNMENT PRINTING OFFICE 1984—705-040/A4471

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:03Z
Check the source to verify that this is the current version before use.