The documentation and process conversion measures necessary to comply with this amendment shall be completed by 8 March, 2002

INCH POUND

MIL-PRF-19500/276D
AMENDMENT 1
8 December 2002

PERFORMANCE SPECIFICATION

SEMICONDUCTOR DEVICE, THYRISTORS (CONTROLLED RECTIFIERS), SILICON TYPES 2N2323, 2N2324, 2N2326, 2N2328, 2N2329 AND S VERSIONS 2N2323A, 2N2324A, 2N2326A, 2N2328A, 2N2329A AND S VERSIONS JAN, JANTX, JANTXV, AND JANS

This amendment forms a part of MIL-PRF-19500/276D, dated 5 January 2002 and is approved for use by all Departments and Agencies of the Department of Defense.

PAGE 2

1.4, right column part numbers, delete and substitute, “2N2323A through 2N2329A, 2N2323AS through 2N2329AS”.

PAGE 8

4.4.2, delete and substitute “Group B inspection. Group B inspection shall be conducted in accordance with the conditions specified for subgroup testing in table VIa (JANS) and table VIb (JANTX and JANTXV) of MIL-PRF-19500, appendix E, and as follows. Electrical measurements (end-points) and delta requirements shall be in accordance with the applicable steps of table II herein.”.

PAGE 9

4.4.2.2, title, delete and substitute “Group B inspection, appendix E, table VIb (JANTX and JANTXV) of MIL-PRF-19500.”.

4.4.2.2, step 1, conditions, delete “$R_{GK}$ = 1 k ohm for 2N2323 through 2N2329 and 2N2323S through 2N2329S.”.

4.4.2.2, step 1, conditions, delete “$R_{GK}$ = 2 k ohm for 2N2323A through 2N2329A and 2N2323AS through 2N2329AS.”.

PAGE 10

4.4.3.1, subgroup C6, conditions, delete and substitute “Not applicable”.

PAGE 18

TABLE II, footnote 1/, delete and substitute “1/ The electrical measurements for table V of MIL-PRF-19500, appendix E, are as follows: Subgroups 6 and 7, see table II herein, steps 1, 2, 3, and 4.”.


DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:01Z
Check the source to verify that this is the current version before use.

FIGURE 3, delete and substitute;
“

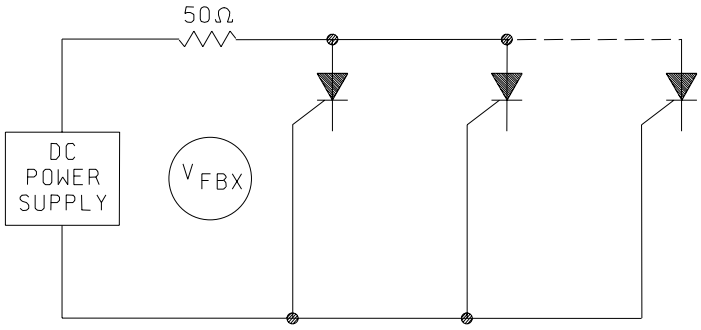


Procedure: Adjust the power supply to the specified value for the device under test.

NOTE:
1. Rate of rise of voltage must be limited to values specified in table I.

FIGURE 3. Blocking-voltage test. ”

Custodians:
Army - CR
Navy - EC
Air Force - 11
DLA - CC

Preparing activity:
DLA - CC

(Project 5961-2583)

Review activities:
Army - MI, SM
Navy - AS, MC, OS
Air Force – 19, 99

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:01Z
Check the source to verify that this is the current version before use.