MIL-S-19500/272C
26 November 1968
SUPERSEDING
MIL-S-19500/272B
20 December 1965

MILITARY SPECIFICATION

# SEMICONDUCTOR DEVICE, DIODE, SILICON, VOLTAGE-REGULATOR TYPES (TX AND NON-TX) 1N3993A THROUGH 1N4000A AND THE RA

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

## 1. SCOPE

1.1 Scope. This specification covers the detail requirements for silicon, 10 watt, voltage-regulator diodes with the following ratings and characteristics. The prefix "TX" is used on devices submitted to and passing the special process-conditioning, testing, and screening tests specified in 4.9 through 4.9.7.3.

1.2 Forward (suffix A) and reverse (suffix RA) types. Forward and reverse types are identical except: the forward (A) types have the cathode connected to the stud; the reverse (RA) types have the anode connected to the stud (see 3.5.2). Designated values are applicable to both types.

1.3 Physical dimensions. See figure 1.

1.4 Ratings and characteristics.

| $BV_Z$ | BV regulation | $P_T$ 1/ $T_C$ = 75° C | $i_r$ (surge) |
|---|---|---|---|
| Volts | Volts | W | a |
| 3.9 to 7.5 (See column 2 of table IV) | (See column 9 of table IV) | 10 | (See column 10 of table IV) |

1/ Derate at 100 mW/° C above $T_C$ = 75° C.

OPERATING CASE TEMPERATURE: -65°C to +150° C

STORAGE TEMPERATURE: -65°C to +175°C

## 2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposals, form a part of the specification to the extent specified herein.

SPECIFICATION

MILITARY

MIL-S-19500 - Semiconductor Devices, General Specification for



Source: https://assist.dla.mil -- Downloaded: 202640-18T14:00Z
Check the source to verify that this is the currentversion before use.

STANDARDS

MILITARY

MIL-STD-750 - Test Methods for Semiconductor Devices

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following document forms a part of the specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

NATIONAL BUREAU OF STANDARDS

Handbook H28 - Screw-Thread Standards for Federal Services.

(Application for copies should be addressed to the Superintendent of Documents, Government Printing Office, Washington, D.C. 20402.)

3. REQUIREMENTS

3.1 General. Requirements shall be in accordance with MIL-S-19500, and as specified herein.

3.2 Abbreviations, symbols, and definitions. The abbreviations, symbols, and definitions used herein are defined in MIL-S-19500.

3.3 Design, construction, and physical dimensions. Diodes shall be of the design, construction, and physical dimensions specified in figure 1.

3.4 Performance characteristics. Performance characteristics shall be as specified in tables I, II, and III.

3.4.1 Process-conditioning, testing, and screening for "TX" types. Process-conditioning, testing, and screening for the "TX" types shall be as specified in 4.9.

3.5 Marking. The following marking specified in MIL-S-19500 may be omitted at the option of the manufacturer:

(a) Manufacturer's identification
(b) Country of origin

3.5.1 "TX" types. Devices in accordance with the requirements for the "TX" type (see 4.9) shall be marked with a "TX" preceding the applicable type designation.


3.5.2 Polarity. Forward (A) types shall have the cathode connected to the stud. Reverse (RA) types shall have the anode connected to the stud and shall be marked with a "R" following the last digit in the type number.

4. QUALITY ASSURANCE PROVISIONS

4.1 Sampling and inspection. Sampling and inspection shall be in accordance with MIL-S-19500 and as specified herein, except that a lot accumulation period requirements shall be six months in lieu of six weeks.



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:00Z
Check the source to verify that this is the current version before use.

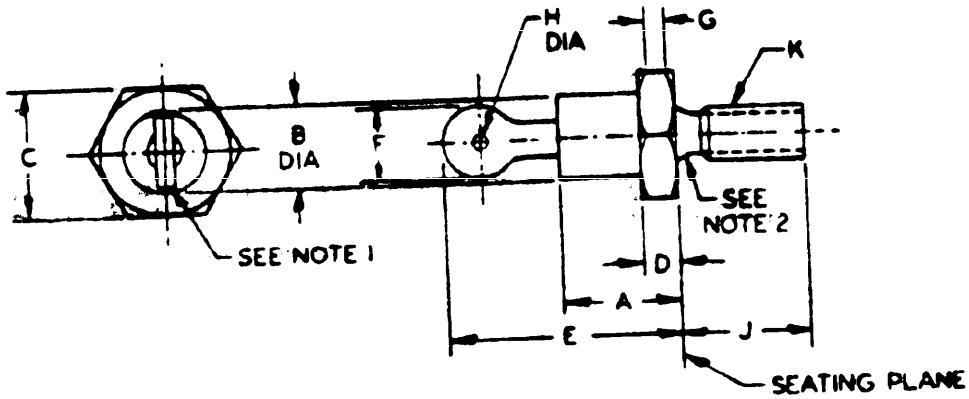


| LTR | DIMENSIONS | | | | NOTES |
|---|---|---|---|---|---|
| | INCHES | | MILLIMETERS | | |
| | MIN | MAX | MIN | MAX | |
| A | --- | .405 | --- | 10.29 | |
| B | --- | .424 | --- | 10.77 | |
| C | .424 | .437 | 10.77 | 11.10 | |
| D | .075 | .175 | 1.90 | 4.44 | |
| E | --- | .800 | --- | 20.32 | |
| F | --- | .250 | --- | 6.35 | 7 |
| G | .060 | --- | 1.52 | --- | |
| H | .060 | --- | 1.52 | --- | |
| J | .422 | .453 | 10.72 | 11.51 | |
| K | --- | --- | --- | --- | 3,4, 5, 6 |

NOTES:
1. Angular orientation of this terminal is undefined.
2. Dia of unthreaded portion .189 inch (4.80 mm) max; .163 inch (4.14 mm) min.
3. The A.S.A. thread reference is 10-32 UNF2A.
4. Max pitch dia of plated threads shall be basic pitch dia .169 inch (4.31 mm) and in accordance with Handbook H28.
5. Unit shall not be damaged by torque of 15 lb-in applied to 10-32NF2B nut assembled on thread.
6. Complete threads shall extend to within 2-1/2 threads of the seating plane.
7. Terminal end shape is unrestricted.
8. For marking requirements see 3.5.
9. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

FIGURE 1. Semiconductor devices, diode, types (TX and Non-TX) 1N3993A thru 1N4000A and the reverse types (RA suffix).



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:00Z
Check the source to verify that this is the current version before use.

4.2 Qualification inspection. Qualification inspection shall consist of the examinations and tests specified in tables I, II, and III. Qualification for a voltage group shall require testing of the highest and lowest nominal voltage units in the group. (The forward and reverse polarity types shall not be considered structurally similar for qualification inspection.) Ten samples of each intermediate type shall be subjected to subgroup 2 of group A and subgroup 1 of group C. The manufacturer has the option of submitting samples individually to subgroups 4 and 5 of group B and subgroups 4 and 5 of group C inspection or of submitting to the tightened combination of these tests using a sample size under the $\lambda = \%$ column and a test duration of 1,000 hours.

4.2.1 Qualification testing. The non-TX types shall be used for qualification testing. Upon request to the qualifying activity, qualification will be extended to include the "TX" type of device.

4.3 Quality conformance inspection. Quality conformance inspection shall consist of the examinations and tests specified in groups A, B, and C. Group A inspection and subgroup 1 of group C inspection shall be performed on an inspection sublot of each type. Subgroups 4 and 5 of group B inspection and subgroups 4 and 5 of group C inspection shall be performed on an inspection lot with 50 percent of the sample being selected from the highest-voltage type present in the lot and 50 percent of the sample being selected from the highest-volume type present in the lot. Subsequent acceptance of voltage types within a group which are higher than those previously subjected to 1,000-hour life testing within the current six-month period (see 4.6) requires retesting of subgroups 4 and 5 of group C inspection for a lot which includes the higher voltage type. Provisions of MIL-S-19500 early acceptance procedures do not apply to this specification.

4.3.1 Inspection data. When specified in the contract or order, one copy of the quality conformance inspection data, pertinent to the device inspection lot, shall be supplied with each shipment (see 6.2).

4.4 Group A inspection. Group A inspection shall consist of the examinations and tests specified in table I.

4.5 Group B inspection. Group B inspection shall consist of the examinations and tests specified in table II.

4.6 Group C inspection. Group C inspection shall consist of the examinations and tests specified in table III. This inspection shall be conducted on the initial lot, and thereafter every six months during production.

4.7 Methods of examination and test. Methods of examination and test shall be as specified in tables I, II, and III, and as follows:

4.7.1 Surge current $i_r$(surge). The currents specified in column 10 of table IV shall be applied in the reverse direction and shall be superimposed on the current ($I_Z$ = column 5 of table IV) a total of five surges at 1 minute intervals. Each individual surge shall be a 1/2-square-wave pulse of 1/120-second duration or an equivalent 1/2-sine wave with the same effective (rms) current.

4.7.2 Voltage regulation ($\Delta BV$). A current at 10 percent of $I_Z$ (column 8) shall be maintained for a period of 90 ± 5 seconds, and the BV shall be noted. The current shall then be increased to a level of 50 percent of $I_Z$ (column 8) and maintained at this level for a period of time equal to 90 ± 5 seconds at which time the voltage change shall not exceed column 9 of table IV. During this test, the case temperature ($T_C$) of the diode shall be equal to 30 ± 3° C.

4.7.3 Time limit for end points. End-point tests for qualification and quality conformance inspection shall be completed within 96 hours after completion of the last test in the subgroup.

4.7.4 Temperature coefficient of breakdown voltage (TCBV). The device shall be temperature stabilized with current applied prior to reading breakdown voltage at the specified case temperature.

4.7.5 Breakdown voltage. The test current (column 5 of table IV) shall be applied for 90 ±5 seconds prior to reading the breakdown voltage. During this test, the case temperature ($T_C$) of the diode shall be equal to 30 ±3° C.

4.8 Test ratings. Test ratings for the diodes covered by this specification shall be as indicated in table IV.



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:00Z
Check the source to verify that this is the current version before use.

TABLE I. Group A inspection

| Examination or test | MIL-STD-750 | | LTPD | | Symbol | Limits | | Unit |
|---|---|---|---|---|---|---|---|---|
| | Method | Details | Non TX | TX | | Min | Max | |
| Subgroup 1 | | | 5 | 5 | | | | |
| Visual and mechanical examination | 2071 | | | | --- | --- | --- | --- |
| Subgroup 2 | | | 5 | 3 | | | | |
| Forward voltage | 4011 | $I_F$ = 2.0 Adc | | | $V_F$ | --- | 1.5 | Vdc |
| Reverse current | 4016 | DC method; $V_R$ = Col. 11 of table IV | | | $I_R$ | --- | Col.12 of table IV | µAdc |
| Breakdown voltage (see 4.7.5) | 4022 | $I_Z$ = Col. 5 of table IV | | | BV | Col. 3 of table IV | Col. 4 of table IV | Vdc |
| Small-signal breakdown impedance | 4051 | $I_Z$ = Col. 5 of table IV. $I_{sig}$ = 10% $I_Z$ | | | Z | --- | Col. 6 of table IV | ohms |
| Knee impedance | 4051 | $I_K$ = 1.0 mAdc; $I_{sig}$ = 10% $I_K$ | | | $Z_K$ | --- | Col. 7 of table IV | ohms |

TABLE II. Group B inspection

| Examination or test | MIL-STD-750 | | LTPD | | Symbol | Limits | | |
|---|---|---|---|---|---|---|---|---|
| | Method | Details | Non TX | TX | | Min | Max | Unit |
| Subgroup 1 | | | 10 | 10 | | | | |
| Physical dimensions | 2066 | (See figure 1) | | | --- | --- | --- | --- |
| Subgroup 2 | | | 10 | 10 | | | | |
| Solderability | 2026 | Depth to cover full flat of terminal; Dwell time 10 ± 1 sec | | | --- | --- | --- | --- |
| Thermal shock (temperature cycling) | 1051 | Test cond. C; T (high) = 175° C | | | --- | --- | --- | --- |
| Thermal shock (glass strain) | 1056 | Test cond. A | | | --- | --- | --- | --- |
| Terminal strength: | 2036 | | | | | | | |
| Tension (lead) | | Test cond. A; 20 lbs; t = 15 ± 3 sec | | | --- | --- | --- | --- |
| Torque (terminal) | | Test cond. $D_1$; 10 oz-in; t = 15 ± 3 sec | | | --- | --- | --- | --- |
| Torque (stud) | | Test cond. $D_2$; 15 lbs-in; t = 15 ± 3 sec | | | --- | --- | --- | --- |
| Bending stress (lead) | | Test cond. F, 3 lbs, t = 15 ± 3 sec | | | --- | --- | --- | --- |
| Seal | 1071 | Fine leak: Test cond. G or H; Gross leak: Test cond. C | | | --- | --- | --- | --- |



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:00Z
Check the source to verify that this is the current version before use.

TABLE II. Group B inspection - Continued

| Examination or test | MIL-STD-750 | | LTPD | | Symbol | Limits | | Unit |
|---|---|---|---|---|---|---|---|---|
| | Method | Details | Non TX | TX | | Min | Max | |
| Subgroup 2 - Continued | | | | | | | | |
| Moisture resistance | 1021 | Omit initial conditioning | | | --- | --- | --- | --- |
| End points: (See 4.7.3.) | | | | | | | | |
| Breakdown voltage (see 4.7.5) | 4022 | $I_Z$ = Col. 5 of table IV | | | BV | Col. 3 of table IV | Col. 4 of table IV | Vdc |
| Reverse current | 4016 | DC method: $V_R$ = Col. 11 of table IV | | | $I_R$ | --- | Col.12 of table IV | μAdc |
| Small-signal breakdown impedance | 4051 | $I_Z$ = Col. 5 of table IV<br>$I_{sig}$ = 10% $I_Z$ | | | Z | --- | Col. 6 of table IV | ohms |
| Subgroup 3 | | | 10 | 10 | | | | |
| Shock | 2016 | Nonoperating; 1,500 G; t = 0.5 msec; 5 blows in each orientation: $X_1$, $Y_1$, and $Y_2$ | | | --- | --- | --- | --- |
| Vibration, variable frequency (nonoperating) | 2056 | Nonoperating | | | --- | --- | --- | --- |
| Constant acceleration | 2006 | Nonoperating; 10 000 G; $X_1$, $Y_1$, and $Y_2$ orientations | | | --- | --- | --- | --- |
| End points: (Same as subgroup 2) | | | | | | | | |
| Subgroup 4 | | | 10 | 7 | | | | |
| High-temperature life (nonoperating) | 1031 | $T_A$ = 175°C; t = 500 hours | | | --- | --- | --- | --- |
| End points: (See 4.7.3.) | | | | | | | | |
| Breakdown voltage (see 4.7.5) | 4022 | $I_Z$ = Col. 5 of table IV | | | BV | Col. 3 of table IV | Col. 4 of table IV | Vdc |
| Reverse current | 4016 | DC method; $V_R$ = Col. 11 of table IV | | | $I_R$ | --- | Col.13 of table IV | μAdc |
| Small-signal breakdown impedance | 4051 | $I_Z$ = Col. 5 of table IV:<br>$I_{sig}$ = 10% $I_Z$ | | | Z | --- | Col. 6 of table IV | ohms |
| Subgroup 5 | | | 10 | 7 | | | | |
| Steady-state operation life | 1026 | $I_Z$ = Col. 15 of table IV;<br>$T_C$ = 150°C; t = 500 hours | | | --- | --- | --- | --- |
| End points: (Same as subgroup 4) | | | | | | | | |



Source: https://assist.dla.mil -- Downloaded: 202610-18T14:00Z
Check the source to verify that this is the current version before use.

TABLE III. Group C inspection

| Examination or test | MIL-STD-750 | | LTPD | | Symbol | Limits | | Unit |
|---|---|---|---|---|---|---|---|---|
| | Method | Details | Non TX | TX | | Min | Max | |
| **Subgroup 1** | | | 10 | 5 | | | | |
| Temperature coefficient (see 4.7.4) | 4071 | $I_Z$ = Col. 5 of table IV; $T_{C1}$ = 30°C; $T_{C2}$ = 125°C | | | TCBV | --- | Col. 14 of table IV | %/°C |
| Voltage regulation (see 4.7.2) | --- | | | | Δ BV | --- | Col. 9 of table IV | Vdc |
| **Subgroup 2** | | | 10 | 5 | | | | |
| Surge current (see 4.7.1) | 4066 | $I_T$ (surge) = Col. 10 of table IV | | | --- | --- | --- | --- |
| End points: (See 4.7.3.) | | | | | | | | |
| Breakdown voltage (see 4.7.5) | 4022 | $I_Z$ = Col. 5 of table IV | | | BV | Col. 3 of table IV | Col. 4 of table IV | Vdc |
| Reverse current | 4016 | DC method; $V_R$ = Col. 11 of table IV | | | $i_R$ | --- | Col. 12 of table IV | μAdc |
| Small-signal breakdown impedance | 4051 | $I_Z$ = Col. 5 of table IV; $I_{sig}$ = 10 percent $I_Z$ | | | Z | --- | Col. 6 of table IV | ohms |
| **Subgroup 3** | | | 10 | 10 | | | | |
| Salt atmosphere | 1041 | | | | --- | --- | --- | --- |
| **Subgroup 4** | | | λ=15 | λ=10 | | | | |
| High-temperature life (monoperating) | 1031 | $T_A$ = 175°C | | | --- | --- | --- | --- |
| End points: (See 4.7.3.) | | | | | | | | |
| Breakdown voltage (see 4.7.5) | 4022 | $I_Z$ = Col. 5 of table IV | | | BV | Col. 3 of table IV | Col. 4 of table IV | Vdc |
| Reverse current | 4016 | DC method; $V_R$ = Col. 11 of table IV | | | $i_R$ | --- | Col. 13 of table IV | μAdc |
| Small-signal breakdown impedance | 4051 | $I_Z$ = Col. 5 of table IV; $I_{sig}$ = 10% $I_Z$ | | | Z | --- | Col. 6 of table IV | ohms |
| **Subgroup 5** | | | λ=15 | λ=10 | | | | |
| Steady-state operation life | 1026 | $I_Z$ = Col. 15 of table IV; $T_C$ = 150°C | | | --- | --- | --- | --- |
| End points: (Same as subgroup 4) | | | | | | | | |



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:00Z
Check the source to verify that this is the current version before use.

4.9 Process-conditioning, testing, and screening for "TX" types. The procedure for process-conditioning, testing, and screening the "TX" types shall be in accordance with 4.9.1 through 4.9.7.3 and figure 2. The process-conditioning shall be conducted on 100 percent of the lot, prior to submission of the lot to the tests specified in tables I, II, and III. (At the option of the manufacturer, the non-TX types may be subjected to process-conditioning and testing.)

4.9.1 Quality assurance (lot verification). Quality assurance shall keep lot records for three years minimum, monitor for compliance to the prescribed procedures, and observe that satisfactory manufacturing conditions and records on lots are maintained for these devices. The records shall be available for review by the customer at all times. The quality-assurance monitoring shall include, but not be limited to: process-conditioning, testing, and screening. (The conditioning and screening tests performed as standard-production tests need not be repeated when these are predesignated and acceptable to the Government as being equal to or more severe than specified herein and the relative process-conditioning sequence is maintained.)

4.9.2 High-temperature storage. All devices shall be stored for at least 48 hours at a minimum temperature ($T_A$) of 175°C.

4.9.3 Thermal shock (temperature cycling). Temperature cycling shall be in accordance with MIL-STD-750, Method 1051, test condition C, except that the high temperature shall be 175°C. This test may be started at any point in the cycle. All devices shall be maintained at each end temperature until thermal equilibrium has been reached but for not less than 15 minutes. All devices may be maintained at room ambient temperature for not more than 5 minutes between each period at the end temperature.

4.9.4 Acceleration. All devices shall be subjected to acceleration test in accordance with MIL-STD-750, Method 2006, with the following exceptions: The test shall be performed one-time in the $Y_1$ orientation only, at a peak level of 10,000 G minimum. The one-minute hold-time requirement shall not apply.

4.9.5 Hermetic seal (fine-leak) test. All devices shall be fine-leak tested in accordance with MIL-STD-750, Method 1071, test condition G or H.

4.9.6 Hermetic seal (gross-leak) test. All devices shall be tested in accordance with MIL-STD-750, Method 1071, test condition F. All devices that bubble shall be removed from the lot.

4.9.7 Pre burn-in tests. The parameters BV, $I_R$ and Z of table V shall be measured and the data recorded for all devices in the lot. All devices shall be handled or identified such that the delta end points can be determined after the burn-in test. All devices which fail to meet these requirements initially will be removed from the inspection lot and the quantity removed noted on the lot history.

TABLE V. Burn-in test measurements

| Examination or test | MIL-STD-750 | | Symbol | Limits | | Unit |
|---|---|---|---|---|---|---|
| | Method | Details | | Min | Max | |
| Breakdown voltage | 4022 | $I_Z$ = Col. 5 of table IV | BV | Col. 3 of table IV | Col. 4 of table IV | Vdc |
| Reverse current | 4016 | DC method: $V_R$ = Col. 11 of table IV | $I_R$ | --- | Col. 12 of table IV | Adc |
| Small-signal breakdown impedance | 4051 | $I_Z$ = Col. 5 of table IV: $I_{sig}$ = 10% $I_Z$ | Z | --- | Col. 6 of table IV | ohms |



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:00Z
Check the source to verify that this is the current version before use.


TABLE IV. Test ratings for diodes, types (TX and Non-TX) 1N3993A through 1N4000A and the reverse types (RA suffix).

| Col 1 | Col 2 | Col 3 | Col 4 | Col 5 | Col 6 | Col 7 | Col 8 | Col 9 | Col 10 | Col 11 | Col 12 | Col 13 | Col 14 | Col 15 |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Voltage group | BV Nom. | BV Min. | BV Max. | $I_Z$ Test current $T_C$=30°C | Z Impedance | $Z_K$ Knee impedance | $I_Z$ Max dc current $T_C$=75°C | ΔBV Voltage regulation | $I_r$ (surge) $T_C$=30°C | $V_R$ Reverse voltage | $I_R$ Reverse current dc | $I_R$ Reverse current dc | TC BV Temperature coefficient | $I_Z$ Max dc current $T_C$=150°C |
| | Volts | Volts | Volts | mA | ohms | ohms | Adc | Volts | a | Volts | μA | μA | %/°C | mA |
| 1N3993A | 3.9 | 3.70 | 4.10 | 640 | 2.0 | 400 | 2.44 | .80 | 12 | .5 | 100 | 200 | -.060 | 610 |
| 1N3994A | 4.3 | 4.08 | 4.52 | 580 | 1.5 | 400 | 2.20 | .72 | 11 | .5 | 100 | 200 | -.050 | 550 |
| 1N3995A | 4.7 | 4.45 | 4.94 | 530 | 1.2 | 500 | 2.00 | .68 | 10 | 1.0 | 50 | 100 | -.025 | 500 |
| 1N3996A | 5.1 | 4.84 | 5.36 | 490 | 1.1 | 550 | 1.84 | .64 | 9 | 1.0 | 10 | 20 | -.030 | 460 |
| 1N3997A | 5.6 | 5.32 | 5.88 | 445 | 1.0 | 600 | 1.68 | .60 | 8 | 1.0 | 10 | 20 | +.040 | 420 |
| 1N3998A | 6.2 | 5.89 | 6.51 | 405 | 1.1 | 700 | 1.52 | .56 | 7 | 2.0 | 10 | 20 | +.045 | 380 |
| 1N3999A | 6.8 | 6.46 | 7.14 | 370 | 1.2 | 500 | 1.40 | .48 | 7 | 2.0 | 10 | 20 | +.057 | 350 |
| 1N4000A | 7.5 | 7.12 | 7.88 | 335 | 1.3 | 250 | 1.24 | .48 | 6 | 3.0 | 10 | 20 | +.061 | 310 |





Source: https://assist.dla.mil -- Downloaded: 202610-18T14:00Z
Check the source to verify that this is the current version before use.

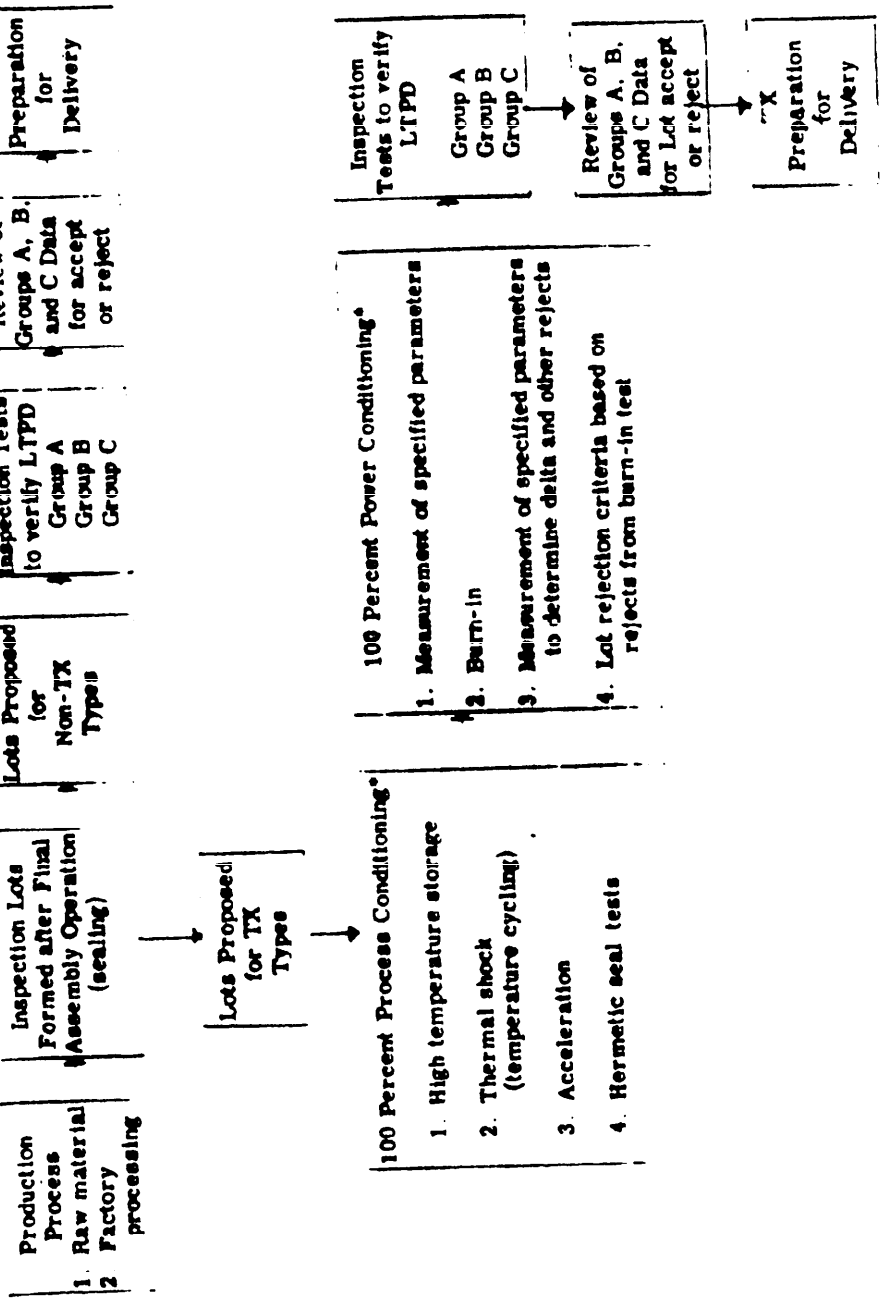


*ORDER OF THE TESTS IN THE BLOCKS SHALL BE PERFORMED AS SHOWN

FIGURE 2 Order of procedure diagram for Non-TX and TX types.



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:00Z
Check the source to verify that this is the current version before use.

4 9 7 1 Burn-in test All devices shall be operated for 96 hours minimum under the following steady state conditions

$T_C$ = 150° C.
$I_Z$ = Col. 15 of table IV

4 9 7.2 Post burn-in tests. The parameters BV, $I_R$, and Z of table V shall be retested after burn-in and the data recorded for all devices in the lot. The parameters measured may not change during the burn-in test from initial value by more than the specified amount as follows:

$\Delta BV$ = ±2% of initial value.
$\Delta I_R$ = 100% or 100 nAdc, whichever is greater.
$\Delta Z$ = 10% of initial value.

4.9.7.3 Burn-in test failure (screening). All devices that exceed the delta (Δ) limits of paragraph 4.9.7.2 or the limits of those tests performed on table V shall be removed from the inspection lot and the quantity removed shall be noted on the permanent lot history. Where the quantity removed after burn-in exceeds 10% of the total inspection lot on burn-in test, the entire lot shall be unacceptable.

5. PREPARATION FOR DELIVERY

5.1 Preparation for delivery. Preparation for delivery shall be in accordance with MIL-S-19500.

6. NOTES

6 1 Notes. The notes specified in MIL-S-19500 are applicable to this specification.

6.2 Ordering data. Inspection data (see 4.3.1).

6.3 Interchangeability criteria. The types covered herein are interchangeable with the devices covered by the superseded MIL-S-19500/272B.

6.4 Changes from previous issue. Asterisks are not used in this revision to identify changes with respect to the previous issue, due to the extensiveness of the changes.

Custodians:
Army - EL
Navy - EC
Air Force - 11

Review activities:
Army - EL, MU
Navy - SH
Air Force - 11, 17, 85
DSA - ES

User activities:
Army - SM, MI
Navy - CG, MC, WP, AS, OS
Air Force - 19

Preparing activity:
Army - EL

(Project 5961-0082-6)



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:00Z
Check the source to verify that this is the current version before use.

**INSTRUCTIONS**: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

*(Fold along this line)*

DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

**BUSINESS REPLY MAIL**
FIRST CLASS PERMIT NO 12062 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
U.S. Army Communications - Electronics Command
ATTN: DRSEL-ED-TO
Fort Monmouth, NJ 07703

Source: https://assist.dla.mil -- Downloaded: 202610-18T14:00Z
Check the source to verify that this is the current version before use.

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

# STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

*(See Instructions – Reverse Side)*

| 1. DOCUMENT NUMBER | 2. DOCUMENT TITLE |
|---|---|
| | |

| 3a. NAME OF SUBMITTING ORGANIZATION – | 4. TYPE OF ORGANIZATION *(Mark one)* |
|---|---|
| | ☐ VENDOR |
| | ☐ USER |
| b. ADDRESS *(Street, City, State, ZIP Code)* | ☐ MANUFACTURER |
| | ☐ OTHER *(Specify)*: _____ |

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

| 7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional | b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional |
|---|---|
| c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional | 8. DATE OF SUBMISSION *(YYMMDD)* |

DD FORM 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 202610-18T14:00Z
Check the source to verify that this is the current version before use.