
MILITARY SPECIFICATION SHEET

ATTENUATORS, FIXED, COAXIAL LINE (SERIES N),

FREQUENCY RANGE: DC TO 3 GHz, CLASS IIA, LOW POWER

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the attenuators described herein shall consist of this specification and the latest issue of MIL-A 3933.

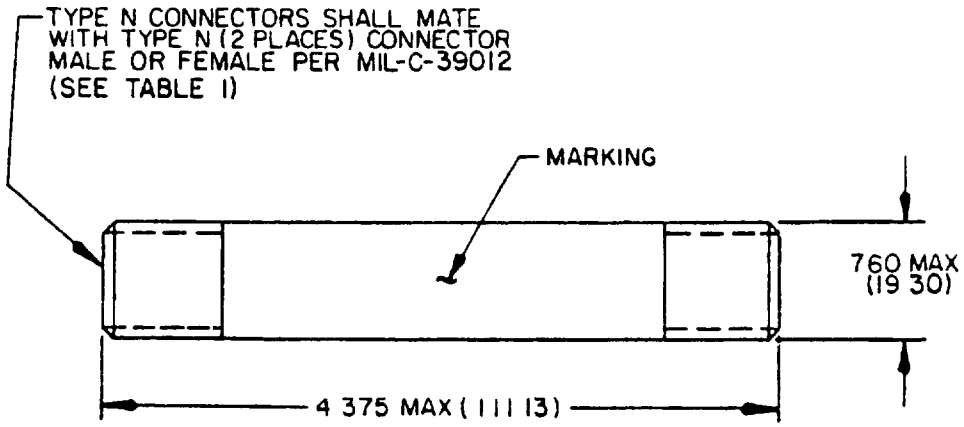

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Metric equivalents are in parentheses.

FIGURE 1 Dimensions and configuration.

ENGINEERING DATA:

Class. IIA

Operating frequency range: DC to 3 gigahertz (GHz).

Test frequencies for VSWR and attenuation measurements DC, 0.75, 1.5, 2.25, and 3 GHz.

Basic test frequency· 1.5 GHz.

Operating temperature range: -55°C to +85°C.

Maximum weight: 5.5 ounces.

FSC 5995

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:28Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Nominal impedance: 50 ohms.

Attenuation: See table I.

Power: See table I.

VSWR: See table I.

Part number: M3933/1 -(and dash number from table I.)

TABLE I. Electrical characteristics.

Dash number	Attenuation dB			Maximum power input		1/ VSWR maximum		Attenuator connectors
	Nominal	Deviation		AV (W)	Peak 2/ (kW)	DC	DC to 3 GHz	
		DC	DC to 3 GHz					
04 N S	40	±0.05	±0.4	1	1	1.02:1	1.20:1	Female (2)
06 N S	1	±0.02	±0.2	2	2	1.02:1	1.20:1	Male and female
07 N S	2	±0.02	±0.2	2	2	1.02:1	1.20:1	Male and female
08 N S	3	±0.02	±0.2	2	2	1.02:1	1.20:1	Male and female
09 N S	4	±0.02	±0.2	2	2	1.02:1	1.20:1	Male and female
10 N S	5	±0.02	±0.2	2	2	1.02:1	1.20:1	Male and female
11 N S	6	±0.02	±0.2	2	2	1.02:1	1.20:1	Male and female
12 N S	7	±0.02	±0.2	1	2	1.02:1	1.20:1	Male and female
13 N S	8	±0.02	±0.2	1	2	1.02:1	1.20:1	Male and female
14 N S	9	±0.02	±0.2	1	2	1.02:1	1.20:1	Male and female
15 N S	10	±0.02	±0.2	1	2	1.02:1	1.20:1	Male and female
16 N S	12	±0.05	±0.2	1	2	1.02:1	1.20:1	Male and female
17 N S	15	±0.05	±0.2	1	2	1.02:1	1.20:1	Male and female
18 N S	20	±0.05	±0.2	1	1	1.02:1	1.20:1	Male and female
19 N S	25	±0.05	±0.2	1	1	1.02:1	1.20:1	Male and female
20 N S	30	±0.05	±0.2	1	1	1.02:1	1.20:1	Male and female
21 N S	40	±0.05	±0.4	1	1	1.02:1	1.20:1	Male and female
22 N S	50	±0.05	±0.4	1	1	1.02:1	1.20:1	Male and female
23 N S	1	±0.02	±0.2	2	2	1.02:1	1.20:1	Female (2)

1/ VSWR value is for both ends.
2/ Peak power for a duty cycle of 5×10^{-4} maximum duration 5 microseconds.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:28Z
Check the source to verify that this is the current version before use.

NOTE: Attenuators covered by this specification sheet are substitutable for the manufacturer's part numbers specified in table II. This information in no way implies that the manufacturer's part number or NSN is suitable for the military part number.

TABLE II. Substitution data.

Military part number M3933/1-	Manufacturer's code	Manufacturer's part number	NSN
04	80058	CN-248A/U	5985-00-817-4918
04	93459	51-40	5985-00-817-4918
06	93459	50-1	5985-00-970-4085
07	93459	50-2	5985-00-084-4110
08	49955	341-1073P1	5985-00-617-9980
08	18876	9072258	5985-00-617-9980
08	93459	50-3	5985-00-965-6318
08	99899	771-3	5985-00-920-6704
09	93459	50-4	5985-00-834-3662
09	93459	50-4	5985-00-949-8795
10	93459	50-5	5985-00-842-7139
11	93459	50-6	5985-00-615-3104
11	99899	771-6	5985-00-920-6705
12	93459	50-7	5985-00-084-4111
13	26512	GA810J50-8	5985-00-827-2364
13	93459	50-8	5985-00-827-2364
13	03538	7844083	---
14	93459	50 9	5985-00-084-4109
14	93459	50 9	5985-00-524-1421
15	56232	0002929-50-10	5985-00-655-7589
15	93459	50 10	5985-00-655-7589
15	99899	771-10	5985-00 917-6599
16	82577	723850-??	5985-00-473-5453
16	93459	50 12	5985-00-473-5453
17	82577	723850-13	5985 00 788-8639
17	93459	50-15	5985-00-788-8639
18	99899	771-20	5985 01-108-9535
18	16055	725-20	5985-00 626-4370
18	93459	50 20	5985 00-626-4370
18	99899	771-20	5995-00 132-2459
19	93459	50 25	5985-00-788-8638
19	82577	723898-98 Rev A	5985-00-788-8638
20	93459	50 30	5985-00-777-1382
20	05869	723898-96 Rev A	5985-00-777-1382
21	93459	50-40	---
22	93459	50-50	5985-00-999-8094
23	93459	51-1	5985-00-908-8045

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:28Z
Check the source to verify that this is the current version before use.

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities.
Army - MI
Air Force - 11, 99
DLA - ES

User activities:
Army - SM
Navy - MC, SH, AS

Agent:
DLA - ES

Preparing activity:
Navy - EC

(Project 5985-0983-1)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:28Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements All users of military standardization documents are invited to provide suggestions This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the proolems Enter in block 6 any remarks not related to a specific paragraph of the document If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered

NOTE This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY
Naval Electronic Systems Command
Washington, DC 20363

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO 12503 WASHINGTON D C
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

COMMANDER
NAVAL ELECTRONIC SYSTEMS COMMAND
DEFENSE STANDARDIZATION PROGRAM BRANCH
DEPARTMENT OF THE NAVY
WASHINGTON, DC 20363
ATTN. ELEX 3111

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:28Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1 DOCUMENT NUMBER	2 DOCUMENT TITLE
MIL-A-3933/1C	

3a. NAME OF SUBMITTING ORGANIZATION	4 TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
	☐ USER
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ MANUFACTURER
	☐ OTHER *(Specify)*

5 PROBLEM AREAS

a. Paragraph Number and Wording

b. Recommended Wording

c. Reason/Rationale for Recommendation

6 REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:28Z
Check the source to verify that this is the current version before use.