
MILITARY SPECIFICATION SHEET

ATTENUATORS, FIXED, COAXIAL LINE (TYPE N CONNECTORS)
FREQUENCY RANGE: DC TO 500 MHz, CLASS III

This specification is approved for use by Naval Electronic Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the attenuators described herein shall consist of this document and the latest issue of Specification MIL-A-3933.

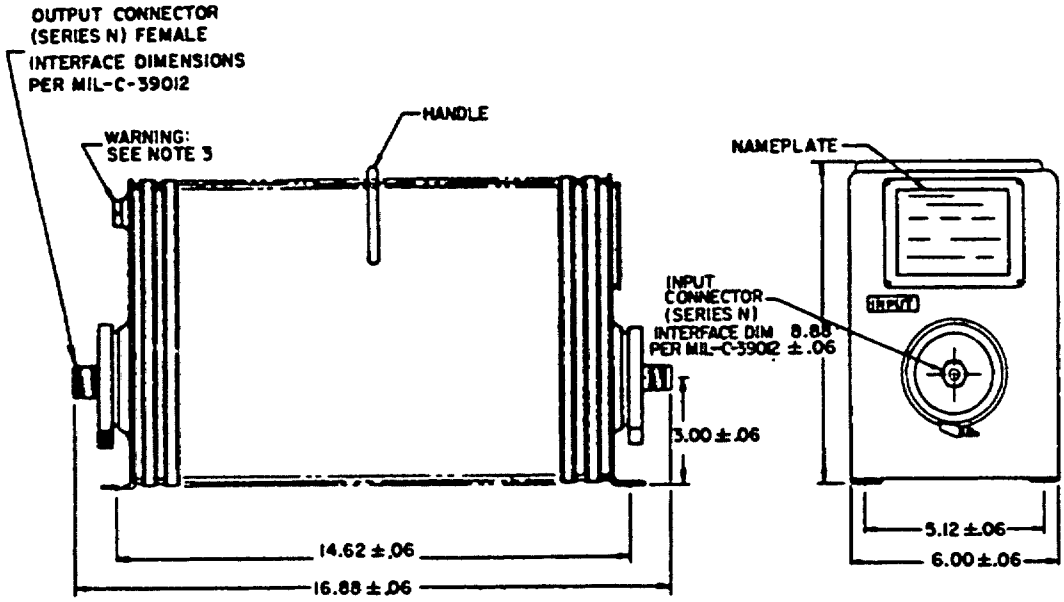

INCHES	MM
.06	1.52
3.00	76.20
5.12	130.05
6.00	152.40
8.88	225.55
14.62	371.35
16.88	428.75

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Shipping plug must be removed and replaced with safety relief valve, E.I.L., A-4158 (supplied) or equal.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:32Z
Check the source to verify that this is the current version before use.

ENGINEERING DATA:

Class: III.

Operating frequency range: DC to 500 MHz.

Test frequencies for VSWR and attenuation measurements:
DC, 100, 200, 300, 400, and 500 MHz.

Basic test frequency: 250 MHz.

Operating temperature range: -40°C to +52°C.

Maximum weight: 17 pounds.

REQUIREMENTS:

Dimensions: See figure 1.

Material: Tank-aluminum.
Finish: Light gray baking enamel per MIL-E-15090.

Coolant oil: 84 ounces of EIL 38, or equivalent.

Nominal impedance: 50 ohms.

Attenuation: See table I.

Power:
Average: 500 watts maximum (input power).
Peak: 1 kW maximum.

VSWR: 1.15:1 maximum.

Part number: M3933/21 (and dash number from table I).

TABLE I. Electrical characteristics.

Dash number	Attenuation (nom)	Attenuation deviation (30 to 500 MHz)
	dB	dB
-1	3	±0.2
-2	6	±0.2
-3	10	±0.2
-4	20	±0.2
-5	30	±0.2

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:32Z
Check the source to verify that this is the current version before use.

NOTE: Attenuators covered by this specification are substitutable for the following commercial types:

Part number M3933/21	Mfr code	Commercial type
-1	91161	AX-500-3 TX-500-3
-2	91161	AX-500-6 TX-500-6
-3	91161	AX-500-10 TX-500-10
-4	91161	AX-500-20 TX-500-20
-5	91161	AX-500-30 TX-500-30

Review activities:
Navy - SH, OS, AS
DSA - ES

User activity:
Navy - MC

Preparing activity:
Navy - EC

Agent:
DSA - ES

(Project 5985-N447)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:32Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?
   ☐ YES ☐ NO *(If "Yes", in what way?)*.

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 68 WHICH MAY BE USED

S/N 0102-014-1802

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:32Z
Check the source to verify that this is the current version before use.