INCH-POUND

MIL-A-3933/23C
20 January 2009
SUPERSEDING
MIL-A-3933/23B
30 June 1981

DETAIL SPECIFICATION SHEET

ATTENUATORS, FIXED, TO-5 CONFIGURATION,
CLASS IV, LOW POWER

This specification is approved for use by all Departments and Agencies of the Department of Defense.

Inactive for new design
after 4 June 1999

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-3933.

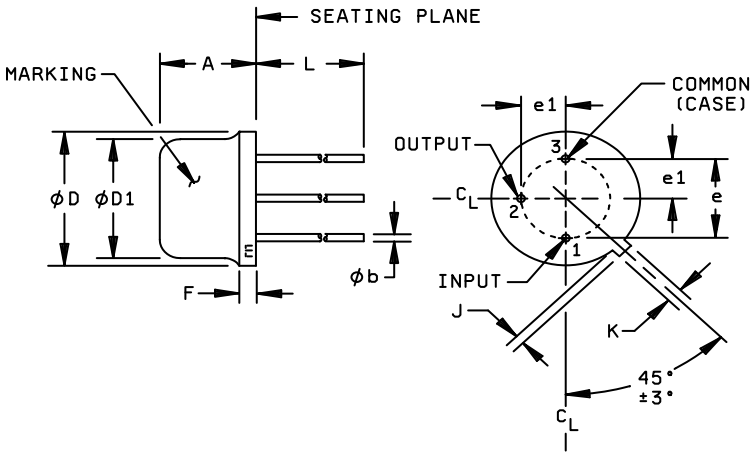

Ltr	Dimensions are in inches	Ltr	Dimensions are in inches
A	.250	e1	.100
L	.50 min	e	.200
D	.360	b	.0175 ± .0015 DIA LEAD TYP
D1	.325		
K	.031 ± .003		
J	.0345 ± .003		
F	.067 ± .058		

FIGURE 1. Flange - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:32Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm	Inches	mm
.0015	.038	.031	.79	.200	5.08
.003	.08	.0345	.876	.250	6.35
.0055	.140	.058	1.47	.325	8.26
.010	.25	.067	1.70	.360	9.14
.0175	.444	.100	2.54	.50	12.7

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ± .010 (.25 mm).

FIGURE 1. Dimensions and configuration.

ENGINEERING DATA:

Class: IV.

Operating frequency range: DC to 1 GHz.

Test frequencies for VSWR and attenuation measurements: DC, 0.25, .05, 0.75, and 1.0 GHz.

Basic test frequency: 0.5 GHz.

Operating temperature range: -55 ° C to +71 ° C.

Material: Shall be corrosion resistant.

Maximum weight: 0.05 oz.

REQUIREMENTS:

Dimensions and configuration : See figure 1.

Nominal impedance : 50 ohms.

VSWR: 1.35:1 maximum.

Attenuation: See table I for attenuation values and tolerances.

Average power input: 100mW maximum.

Part number: M3933/24- (and dash number from table I).

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:32Z
Check the source to verify that this is the current version before use.

TABLE I. Attenuation values.

Dash number	Attenuation values.	Dash number	Attenuation values.
01 NS	3	21 NS	19
02 NS	6	22 NS	21
03 NS	10	23 NS	22
04 NS	13	24 NS	23
05 NS	15	25 NS	24
06 NS	20	26 NS	25
07 NS	30	27 NS	26
08 NS	1	28 NS	27
09 NS	2	29 NS	28
10 NS	4	30 NS	29
11 NS	5	31 NS	31
12 NS	7	32 NS	32
13 NS	8	33 NS	33
14 NS	9	34 NS	34
15 NS	11	35 NS	35
16 NS	12	36 NS	36
17 NS	14	37 NS	37
18 NS	16	38 NS	38
19 NS	17	39 NS	39
20 NS	18	40 NS	40
		41 NS	100

NOTE: Attenuators covered by this specification sheet are substitutable for the manufacturer's part number specified in table II. This information in no way implies that the manufacturer's part number is suitable as a substitute for the military part number.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:32Z
Check the source to verify that this is the current version before use.

TABLE II. Substitution data.

Military part number M3933/23-	Manufacturer's code	Manufacturer's part number	NSN
01	05869	717754-3	-----
01	80063	SM-C-801026-3	-----
01	52634	70352	-----
02	05869	717754-4	-----
02	80063	SM-C-801026-6	-----
02	52634	70355	-----
03	05869	717754-10	-----
03	80063	SM-C-801026-10	-----
03	52634	70359	-----
04	05869	717754-13	-----
04	80063	SM-C-801026-13	-----
04	52634	70362	-----
05	05869	717754-15	-----
05	80063	SM-C-801026-15	-----
05	52634	70364	-----
06	05869	717754-20	-----
06	52634	70369	-----
06	80063	SM-C-801026-20	-----
07	05869	717754-30	-----
07	52634	70398	-----
08	05869	717754-1	-----
08	52634	70350	-----
09	05869	717754-2	-----
09	52634	70351	-----
10	05869	717754-4	-----
10	52634	70353	-----
11	05869	717754-5	-----
11	52634	70353	-----
12	05869	717754-7	-----
12	52634	70356	-----
13	05869	717754-8	-----
13	52634	70357	-----
14	05869	717754-9	-----
14	52634	70358	-----
15	05869	717754-11	-----
15	52634	70360	-----
16	05869	717754-12	-----
16	52634	70361	-----
17	05869	717754-14	-----
17	52634	70363	-----
18	05869	717754-16	-----
18	52634	70365	-----
19	05869	717754-17	-----
19	52634	70366	-----
20	05869	717754-18	-----
20	52634	70367	-----

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:32Z
Check the source to verify that this is the current version before use.

TABLE II. Substitution data Continued.

Military part number M3933/23-	Manufacturer's code	Manufacturer's part number	NSN
21	05869	717754-19	-----
21	52634	70368	-----
22	05869	717754-21	-----
22	52634	70389	-----
23	05869	717754-22	-----
23	52634	70390	-----
24	05869	717754-23	-----
24	52634	70391	-----
25	05869	717754-24	-----
25	52634	70392	-----
26	05869	717754-25	-----
26	52634	70393	-----
27	05869	717754-26	-----
27	52634	70394	-----
28	05869	717754-27	-----
28	52634	70395	-----
29	05869	717754-28	-----
29	52634	70396	-----
30	05869	717754-29	-----
30	52634	70397	-----
31	05869	717754-31	-----
31	52634	70399	-----
32	05869	717754-32	-----
32	52634	70400	-----
33	05869	717754-33	-----
33	52634	70401	-----
34	05869	717754-34	-----
34	52634	70402	-----
35	05869	717754-35	-----
35	52634	70403	-----
36	05869	717754-36	-----
36	52634	70404	-----
37	05869	717754-37	-----
37	52634	70405	-----
38	05869	717754-38	-----
38	52634	70406	-----
39	05869	717754-39	-----
39	52634	70407	-----
40	05869	717754-40	-----
40	52634	70408	-----
41	05869	717754-41	-----
41	52634	70409	-----

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:32Z
Check the source to verify that this is the current version before use.

Referenced documents. This specification sheet only references MIL-DTL-3933.

Marginal notations are not used on this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
Army - CR
Navy - EC
Air Force - 85
DLA - CC

Preparing activity:
DLA - CC

(Project 5985-2009-003)

Review activities:
Army - MI
Navy - AS, MC, SH

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil/

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:32Z
Check the source to verify that this is the current version before use.