INCH-POUND

MIL-A-3933/24B
20 January 2009
SUPERSEDING
MIL-A-3933/24A
24 April 1985

DETAIL SPECIFICATION SHEET

ATTENUATORS, FIXED, COAXIAL LINE (SMA CONNECTORS), BULKHEAD, CLASS IV, LOW POWER

This specification is approved for use by all Departments and Agencies of the Department of Defense.

Inactive for new design
after 4 June 1999

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-3933.

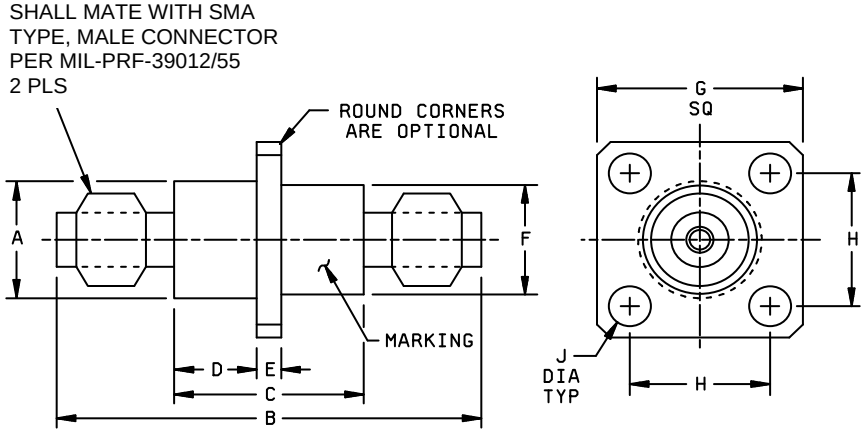

Ltr	Dimensions
A	.30 ±.03
B	1.03 ± .04
C	.46 ± .02
D	.20 ± .03
E	.06 ± .010
F	.28 ± .03
G	.500
H	.340
J	.102 DIA

FIGURE 1. Dimensions and configuration

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:33Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm	Inches	mm
.010	.25	.102	2.59	.340	8.64
.02	.5	.20	5.1	.46	11.7
.03	.8	.250	6.35	.500	12.70
.04	1.0	.28	7.1	1.03	26.2
.062	1.57	.30	7.6		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ± .005 (.13 mm).

FIGURE 1. Dimensions and configuration. Continued

ENGINEERING DATA:

Class: IV.

Operating frequency range: 2 to 12.4 GHz.

Basic test frequency: 8 GHz.

Operating temperature range: -55 ° C to +125 ° C. Power input is derated linearly from +25 ° C to 0.2 watt at +125 ° C.

Maximum weight: 0.45 oz.

REQUIREMENTS:

Dimensions and configuration: See figure 1.
Nominal impedance: 50 ohms.
Attenuation: See table I for attenuation values and tolerances.
VSWR: (1.07 + .015f) : 1 (where f is the frequency in GHz).

Power input:
Average: 2 watts at 25° C.
Peak: 100 watts (Duty cycle of 5 percent and a maximum pulse width of 10 microseconds).

Part number: M3933/24- (and dash number from table I).

TABLE I. Attenuation values.

Dash number		Attenuation values.
01	N	10 ± 0.3
	S	
02	N	15 ± 0.5
	S	
03	N	20 ± 0.5
	S	

NOTES : Attenuators covered by this specification sheet are substitutable for the manufacturer's part numbers specified in table II. This information in no way implies that manufacturer's part number is suitable as a substitute for the military part number.

Military part number M3933/24-	Manufacturer's code	Manufacturer's part number	NSN
01	97942	583R575410	1270-01-083-3368
02	97942	583R575415	-----
03	97942	583R575420	------

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:33Z
Check the source to verify that this is the current version before use.

Referenced documents. In addition to MIL-DTL-3933, this specification sheet references MIL-PRF-39012/55

Marginal notations are not used on this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
Army - CR
Navy - EC
Air Force - 85
DLA - CC

Preparing activity:
DLA - CC

(Project 5985-2009-004)

Review activities:
Army - MI
Navy - AS, MC, SH

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil/

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:33Z
Check the source to verify that this is the current version before use.