INCH-POUND


MIL-DTL-3933/18G
7 April 2011
SUPERSEDING
MIL-DTL-3933/18F
7 November 2002

DETAIL SPECIFICATION SHEET

ATTENUATORS, FIXED, SPACE LEVEL, NON SPACE LEVEL, COAXIAL LINE (SERIES N), FREQUENCY RANGE: DC TO 12.4 GHZ AND DC TO 18 GHZ, CLASS III, LOW POWER

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-3933.

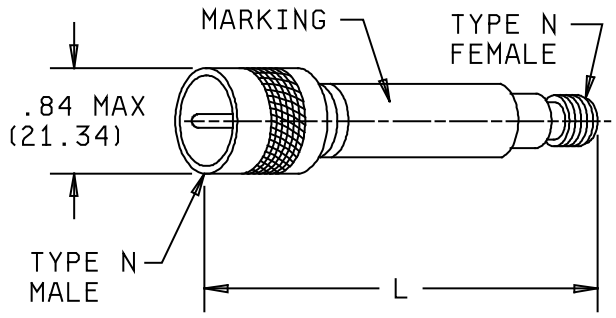

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Metric equivalents are in parentheses.

FIGURE 1. Dimensions and configuration.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:31Z
Check the source to verify that this is the current version before use.

ENGINEERING DATA:

Operating frequency range: DC to 12.4 GHz and DC to 18 GHz.

Test frequency ranges for SWR and attenuation measurements, measured or recorded, when using an Automatic Network Analyzer (ANA) or equivalent test equipment:

100 MHz (or lower) to 12.4 GHz for dash numbers 01 through 20;
100 MHz (or lower) to 18.0 GHz for dash numbers 21 through 24.

Basic test frequencies for sensitive measurements like connector repeatability, temperature sensitivity, power sensitivity and any other measurements where a 'delta' specification is imposed: 6.0 GHz for dash numbers 01 through 20; 8.0 GHz for dash numbers 21 through 24.

Operating temperature range: -55°C to + 125°C.

Maximum weight: See table I.

REQUIREMENTS:

Dimensions and configuration: See figure 1 and table I.

Nominal impedance: 50 ohms.

Attenuation: See table I. Stability and sensitivity:

Maximum change in attenuation after:	up to 10 dB, inclusive (dB)	over 10 dB (dB/dB)
Temperature change or thermal shock	0.05	0.005
Vibration or shock	0.1	0.01
Moisture resistance or salt spray	0.2	0.02
Peak power	0.05	0.005

Frequency sensitivity, maximum: 0.1dB/dB/GHz.
Temperature sensitivity of attenuation, maximum: 0.0004 dB/dB/°C.

Power: See table I.
Power sensitivity for full input power, maximum: 0.005 dB/dB/Watt.

VSWR: See table I.

Terminal connectors: The series N connectors shall meet the interface dimensions of MIL-PRF-39012. There shall be a male plug on one end and a female plug on the other end.

Connector repeatability, maximum variation in attenuation: 0.02 dB.

Part or Identifying Number (PIN): M3933/18- (and dash number from table I with three device level designators are space level (T), screened (S) and non-screened (N) options).

Supersession data: See table III.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:31Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics.

Dash number	Attenuation dB			Maximum power input		VSWR 1/ Maximum				Weight (oz) Max	Dimension L (inches) Maximum
	Nominal	Deviation		AV (W) at 25°C (continuously) 2/	Peak 3/ (kW)	DC to 4.0 GHz	4.0 to 8.0 GHz	8.0 to 12.4 GHz	12.4 to 18.0 GHz		
		DC to 12.4 GHz	DC to 18 GHz								
01 NST	3	±0.2	---	2	1.0	1.15:1	1.20:1	1.25:1	---	5	2.70 (68.58)
02 NST	6	±0.2	---	2	1.0	1.15:1	1.20:1	1.25:1	---	5	2.70 (68.58)
03 NST	10	±0.4	---	2	1.0	1.15:1	1.20:1	1.25:1	---	5	2.70 (68.58)
04 NST	20	±0.4	---	2	1.0	1.15:1	1.20:1	1.25:1	---	5	2.70 (68.58)
05 NST	30	±0.8	---	2	1.0	1.15:1	1.20:1	1.25:1	---	5	2.70 (68.58)
06 NST	40	±0.8	---	2	1.0	1.15:1	1.20:1	1.25:1	---	5	2.70 (68.58)
07 NST	50	±1.25	---	2	1.0	1.15:1	1.20:1	1.25:1	---	5	2.70 (68.58)
08 NST	60	±1.25	---	2	1.0	1.15:1	1.20:1	1.25:1	---	5	2.70 (68.58)
09 NST	1	±0.4	---	5	1.0	1.15:1	1.20:1	1.25:1	---	3	2.70 (68.58)
10 NST	2	±0.4	---	5	1.0	1.15:1	1.20:1	1.25:1	---	3	2.70 (68.58)
11 NST	3	±0.3	---	5	1.0	1.15:1	1.20:1	1.25:1	---	3	2.70 (68.58)
12 NST	5	±0.3	---	5	1.0	1.15:1	1.20:1	1.25:1	---	3	2.70 (68.58)

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:31Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics - Continued.

Dash number	Attenuation dB			Maximum power input		VSWR 1/ Maximum				Weight (oz) Max	Dimension L (inches) Maximum
	Nominal	Deviation		AV (W) at 25°C (continuously) 2/	Peak 3/ (kW)	DC to 4.0 GHz	4.0 to 8.0 GHz	8.0 to 12.4 GHz	12.4 to 18.0 GHz		
		DC to 12.4 GHz	DC to 18 GHz								
13 NST	6	±0.3	---	5	1.0	1.15:1	1.20:1	1.25:1	---	3	2.70 (68.58)
14 NST	10	±0.4	---	5	1.0	1.15:1	1.20:1	1.25:1	---	3	2.70 (68.58)
15 NST	13	±0.5	---	5	1.0	1.15:1	1.20:1	1.25:1	---	3	2.70 (68.58)
16 NST	20	±0.5	---	5	1.0	1.15:1	1.20:1	1.25:1	---	3	2.70 (68.58)
18 NST	40	±0.8	---	5	1.0	1.15:1	1.20:1	1.25:1	---	5	2.70 (68.58)
19 NST	50	±1.0	---	5	1.0	1.15:1	1.20:1	1.25:1	---	5	2.70 (68.58)
20 NST	60	±1.0	---	5	1.0	1.15:1	1.20:1	1.25:1	---	5	2.70 (68.58)
21 NST	3	---	±0.3	2	0.2	1.12:1	1.15:1	1.18:1	1.20:1	3	2.70 (68.58)
22 NST	6	---	±0.3	2	0.2	1.12:1	1.15:1	1.18:1	1.20:1	3	2.70 (68.58)
23 NST	10	---	±0.5	2	0.2	1.12:1	1.15:1	1.18:1	1.20:1	3	2.70 (68.58)
24 NST	20	---	±0.5	2	0.2	1.12:1	1.15:1	1.18:1	1.20:1	3	2.70 (68.58)

1/ VSWR value is for both ends.
2/ Power input is derated linearly to 0 watts at +125°C.
3/ Peak power for a duty cycle of 5×10^{-4}; maximum pulse duration of 5 microseconds.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:31Z
Check the source to verify that this is the current version before use.

TABLE II. Supersession data.

PIN M3933/18	Supersedes M3933/	
01	12-1	13-1
02	12-2	13-2
03	12-3	13-3
04	12-4	13-4
05	12-5	13-5
06	12-6	13-6
07	12-7	13-7
08	12-8	13-8

Referenced documents. In addition to MIL-DTL-3933 this specification sheet references the following document: MIL-PRF-39012.

Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
Army – CR
Navy – EC
Air Force – 85
DLA - CC

Preparing activity:
DLA - CC

(Project 5985-2010-016)

Review activities:
Army – MI
Navy – AS, MC, SH
Air Force - 99

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:31Z
Check the source to verify that this is the current version before use.